

# Cisco Systems Redundant Power System 675

**The Cisco Redundant Power System 675 (RPS 675) is designed to increase availability in a converged data, voice, and video network. The system delivers superior internal power supply redundancy and resiliency at an affordable price.**

The Cisco RPS 675 supports internal power supply redundancy for up to six Cisco networking devices and features an innovative power architecture that provides customers with an immediate failover capability. The Cisco RPS 675 incorporates a quick failover feature, ensuring customers that the connected device will not reboot in the event of an internal power supply failure. For example, if an internal power supply fails on one of the six connected devices, the Cisco RPS 675 automatically senses the failure and delivers uninterrupted power to that device.


When a failure is detected, the Cisco RPS 675 sends status information showing that the other connected devices will not be

supported until the failed device is restored or replaced. This status information can be monitored through CiscoWorks 2000 and the Cisco Cluster Management Suite (CMS) Software that provides Web-based network management. To achieve one-to-one redundancy, each device must be connected to a separate Cisco RPS 675.

The Cisco RPS 675 can be combined with the Cisco Catalyst® 3550-24 PWR desktop switch, featuring inline power and an uninterruptible power supply (UPS) system, to establish all of the elements of the Cisco Centralized Power Provisioning System. This combination provides a resilient, highly available converged network, offering 1) internal redundant power to the switch; 2) power to the IP phone via the switch's inline power feature (rather than wall power); and 3) back-up in the event of a power outage.

The Cisco RPS 675 will support future Cisco switches. Please refer to the 600-Watt Redundant AC Power System data sheet and the Cisco Systems Redundant Power Supply 300 (RPS 300) Data Sheet for non-RPS 675 supported devices.

Figure 1 The Cisco RPS 675 supports redundant power for up to six Cisco networking devices in a convenient single rack-unit (1RU) form factor

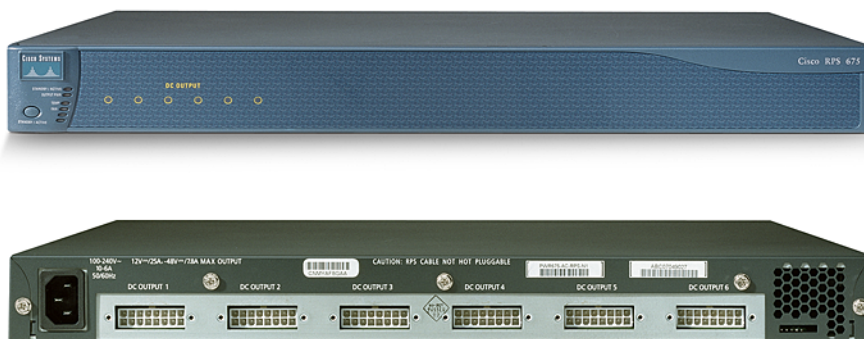




## Product Applications


The Cisco RPS 675 can be deployed in a variety of situations to ensure network resiliency for mission-critical customer applications. Figure 2 illustrates the need for a more resilient network that provides maximum availability: a converged voice and data network includes switches connected to IP phones and PCs. In the rare event of a switch internal power supply failure, the Cisco RPS 675 ensures seamless voice/data network operation without interruption. In this scenario, multiple switches with inline power are supported by the Cisco RPS 675. The switches are connected to PCs and are used to power IP phones.

Figure 2 10/100 IP Phone and Desktop Computer Connections

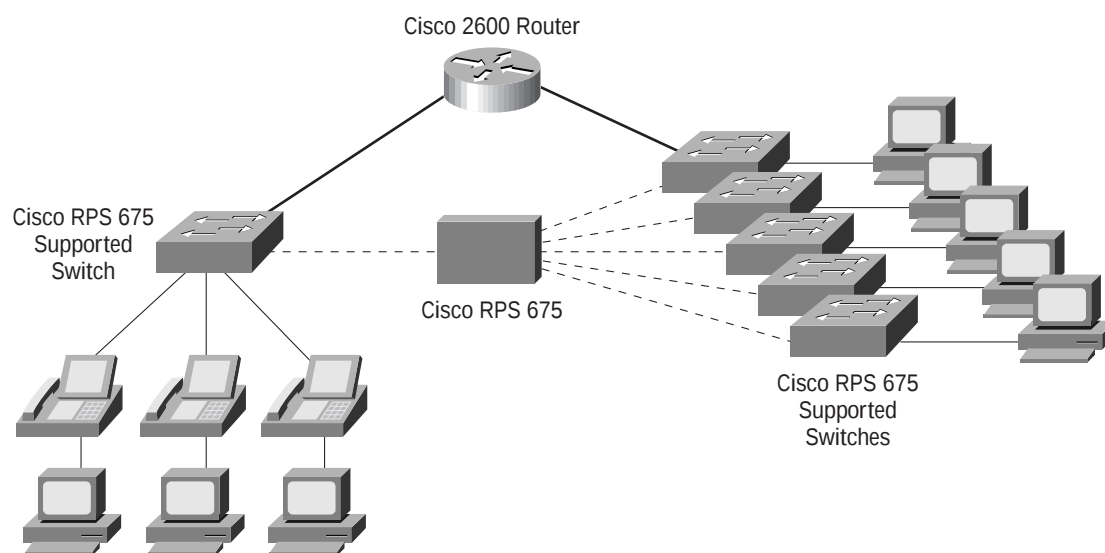

The Cisco RPS 675 also provides maximum resiliency when implemented with one-to-one redundancy. With a one-to-one configuration, backup for an internal power supply failure of the associated switch is guaranteed. This application, displayed in Figure 3, a single Cisco RPS 675 is used to support a single desktop switch.

Figure 3 One-to-One Redundancy

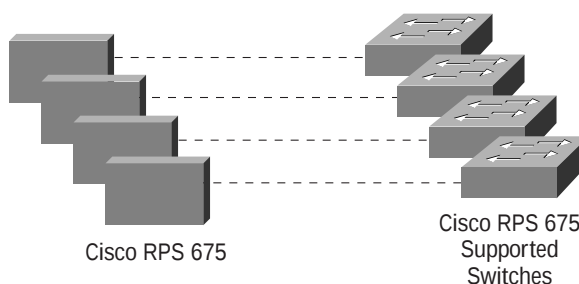



## Key Benefits and Features

### High Availability/Increased Network Uptime

- Less than 60 s failover capability prevents switch reboot after an internal switch power failure
- Supports traditional Ethernet switches (12V output) and new inline powered Ethernet switches (-48V output) for voice-over-IP (VoIP) telephones
- The Cisco RPS 675, in combination with an uninterruptible power system (UPS), delivers maximum network uptime by providing backup for the primary internal power supply as well as battery backup to maintain availability during power outages
- Mean Time Between Failures (MTBF) in excess of 255,000 hours

### Ease-of-Use and Ease-of-Deployment

- Single rack-unit (1RU) high form factor provides the most efficient wiring closet space utilization available
- Users can identify and monitor the following activity on the Cisco RPS 675, using the CiscoWorks2000 or Cisco CMS Software network management applications:
  - Switch connectivity
  - Power delivery status
- Hot insertion of external devices
- LEDs on front panel indicate:
  - System status (Active, Standby, Off)
  - Internal DC power status
  - DC output power status for each channel
  - Thermal status
  - Fan status

### Cost-Effective Solution

- Innovative power architecture delivers a cost-effective unit price and allows the Cisco RPS 675 to support up to six switches, reducing the redundant power cost per switch
- One DC power cable included (CAB-RPS-1614=)

## Technical Specifications

### Supported Products

- Catalyst 3550 Series Switches
- Catalyst 2980G-A Switch
- Catalyst 2950 Series Switches
- Catalyst 2950 Series LRE Switches
- Catalyst 2900 LRE XL Switches



## **Connectors and Cabling**

RPS to external device connection: 1.2-meter cable with a 16-pin connector on the RPS end, and 14-pin connector on the switch end. The Cisco RPS 675 comes with one cable; others must be ordered separately. See ordering information below.

## **Indicators**

- Status LEDs—standby/active, output power, temperature, fan
- DC Output LEDs—DC output status for each of the six channels

## **Dimensions and Weight**

- 1.75 x 17.5 x 14.88 in. (4.5 x 44.5 x 37.8 cm)
- Single rack-unit (1RU) high
- 13 lb (5.9 kg)

## **Environmental Conditions and Power Requirements**

- Operating temperature: 32 to 113 F (0 to 45 C)
- Storage temperature: -4 to 149 F (-20 to 65 C)
- Operating relative humidity: 10 to 85 percent non-condensing
- Operating altitude: up to 10,000 ft (3000 m)
- Storage altitude: up to 15,000 ft (4570 m)
- Power consumption: 675W maximum for both outputs; 375W maximum for -48VDC and 300W maximum for 12VDC
- AC input voltage/frequency: 85 to 264 VAC/50 to 60 Hz
- MTBF in excess of 255,000 hours

## **Electromagnetic Emissions Certifications**

- FCC Part 15 Class A
- EN 55022 Class A
- VCCI Class A
- AS/NZS 3548 Class A
- CE Marking
- BSMI
- CCIB approval pending
- NOM approval pending



### Safety Certifications

- UL 60950 3RD edition
- CAN/CSA C22.2 No. 60950-00
- EN 60950
- IEC 60950
- AS/NZS 3260, TS001
- CE Marking
- CCC

### Warranty

Limited lifetime warranty

### Ordering Information

- Model Number: PWR675-AC-RPS-N1=
- Cisco Redundant Power System 675 (RPS 675) with 1 connector cable
- The Cisco RPS 675 is sold with one cable. Other cables must be ordered separately.
- Cable: CAB-RPS-1614=
- 1.2 meter cable for Cisco RPS 675 to external device connection
- For More Information on Cisco Products, Contact:
- U.S. and Canada: 800 553-NETS (6387)
- Europe: 32 2 778 4242
- Australia: 612 9935 4107
- Other: 408 526-7209
- World Wide Web URL: <http://www.cisco.com>



Corporate Headquarters  
Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
[www.cisco.com](http://www.cisco.com)  
Tel: 408 526-4000  
800 553-NETS (6387)  
Fax: 408 526-4100

European Headquarters  
Cisco Systems International BV  
Haarlerbergpark  
Haarlerbergweg 13-19  
1101 CH Amsterdam  
The Netherlands  
[www-europe.cisco.com](http://www-europe.cisco.com)  
Tel: 31 0 20 357 1000  
Fax: 31 0 20 357 1100

Americas Headquarters  
Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
[www.cisco.com](http://www.cisco.com)  
Tel: 408 526-7660  
Fax: 408 527-0883

Asia Pacific Headquarters  
Cisco Systems, Inc.  
Capital Tower  
168 Robinson Road  
#22-01 to #29-01  
Singapore 068912  
[www.cisco.com](http://www.cisco.com)  
Tel: +65 6317 7777  
Fax: +65 6317 7799

Cisco Systems has more than 200 offices in the following countries and regions. Addresses, phone numbers, and fax numbers are listed on the

**Cisco Web site at [www.cisco.com/go/offices](http://www.cisco.com/go/offices)**

Argentina • Australia • Austria • Belgium • Brazil • Bulgaria • Canada • Chile • China PRC • Colombia • Costa Rica • Croatia  
Czech Republic • Denmark • Dubai, UAE • Finland • France • Germany • Greece • Hong Kong SAR • Hungary • India • Indonesia • Ireland  
Israel • Italy • Japan • Korea • Luxembourg • Malaysia • Mexico • The Netherlands • New Zealand • Norway • Peru • Philippines • Poland  
Portugal • Puerto Rico • Romania • Russia • Saudi Arabia • Scotland • Singapore • Slovakia • Slovenia • South Africa • Spain • Sweden  
Switzerland • Taiwan • Thailand • Turkey • Ukraine • United Kingdom • United States • Venezuela • Vietnam • Zimbabwe

All contents are Copyright © 1992–2003 Cisco Systems, Inc. All rights reserved. Catalyst, Cisco, Cisco IOS, Cisco Systems, and the Cisco Systems logo are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the U.S. and certain other countries.

All other trademarks mentioned in this document or Web site are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0301R)