


REVISIONS		DATE	APPROVED
ZONE	LTR	DESCRIPTION	

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE NDBC ENGINEERING DEPARTMENT.

NOTES:

- 1 #10-32 X 1.0 FLAT HD. HARDWARE IS SUPPLIED WITH EACH NEW ANTENNA, ITEM 4. REPLACE WITH NDBC CTRL # 3329 IF DAMAGED OR MISSING.
- 2 NEW MODEMS, ITEM 3, WILL REQUIRE MOUNTING HOLES TO BE TAPPED WITH A #6 BOTTOMING TAP PRIOR TO INSTALLATION.

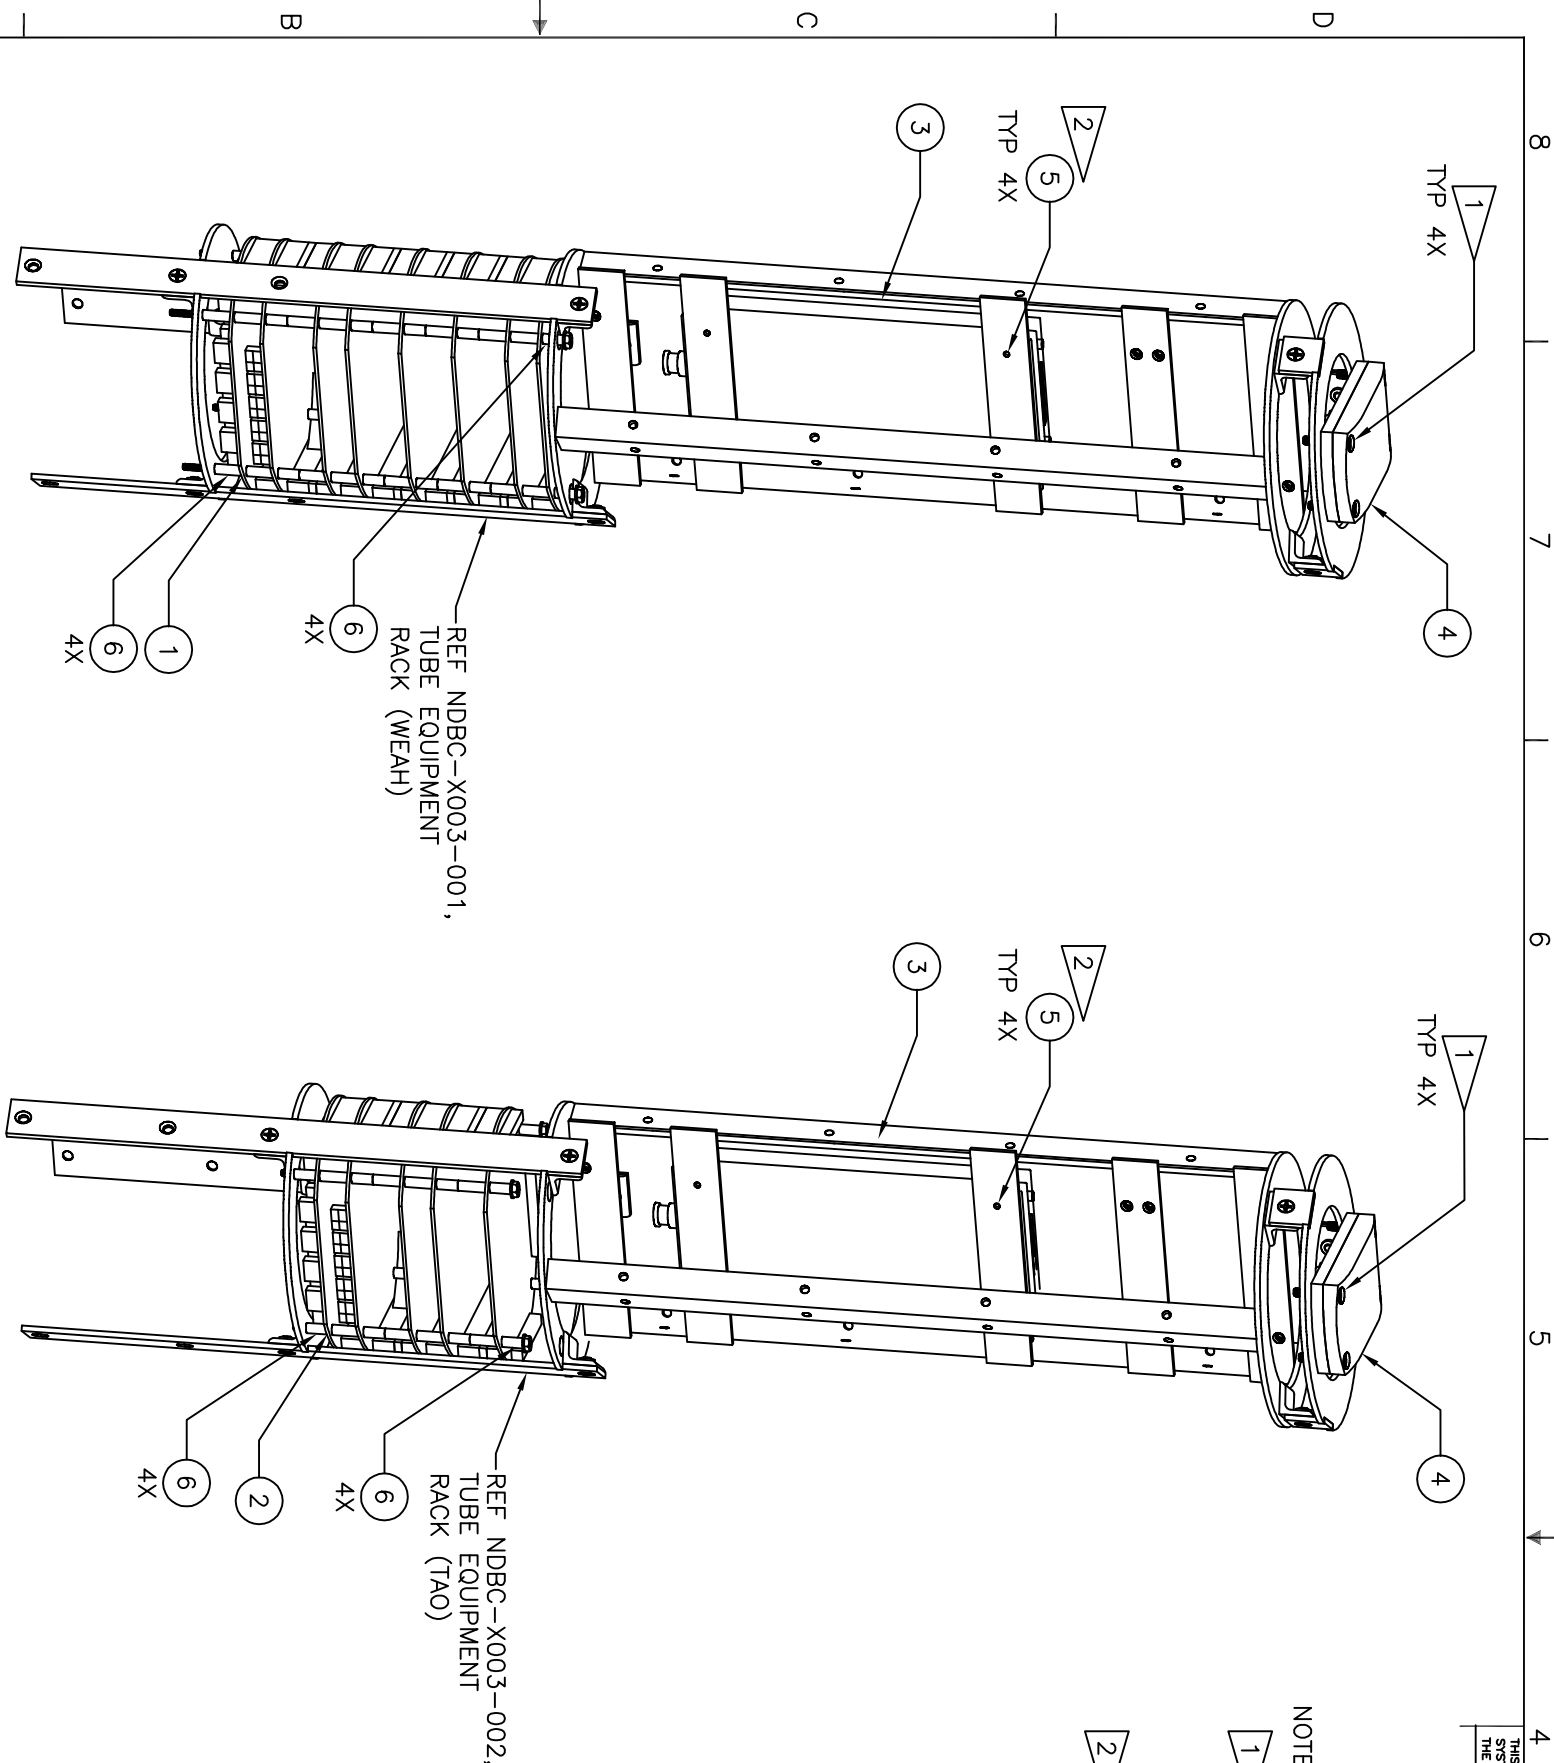

AMPS TUBE EQUIPMENT INSTALLATION - 001
WEATHER CONFIGURATION (WEAH)

AMPS TUBE EQUIPMENT INSTALLATION - 002
TAO CONFIGURATION (TAO)

QTY.	NOTES	DESCRIPTION	NDBC CONTROL NO.	PART/SPEC. NUMBER	ZONE	ITEM NO.
8		STANDOFF, 142 ID X .25 OD X .375 LG., NYLON	14216		B5,B7	6
4		SCREW, MACH. FLAT HD. #6-32 X 0.375, 18-8SS, McMaster-CARR	13135	91771A146	C6,C8	5
1		ANTENNA, DUAL USE, GPS/RF WITH TNC & SMA CONN., NAL RESEARCH		SAF-4070-IGUK	D5,D7	4
1		OPERATIONALLY READY IRIDIUM MODEM (DOD)		NDBC-X005-001	C6,C8	3
1		AMPS PCB STACK ASSEMBLY (TAO)		541000-002	B5	2
-		AMPS PCB STACK ASSEMBLY (WEAH)		541000-001	B7	1
-002-001						

PARTS LIST

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.		CONTRACT NO. -	
DRAWN BY: JXX 1.010	APPROVALS: -	DATE: -	
DO NOT SCALE DRAWING	CHECKED BY: F. LOSSETT	DATE: 10/26/07	
CONFIGURATION MGT. APPROVAL	ENGINEER APPROVAL	DATE: -	
TAO	NDBC PROJ. ENG. DATE: -	SIZE: D	
WEAH	DATE: -	CODE CODE: -	
USED ON	DATE: -	DRAWING NO: 540000	
APPLICATION	DATE: -	REV: -	



SAIC
Systems Analysis, Inc.



NATIONAL DATA BUOY CENTER
John C. Stennis Space Center
Stennis Space Center, Mississippi 39529-6000

AutocAD Drawing/Sketch:
Printed Copies May Be Obsolete:
Validate Prior to use.

REVISED: 03/06/08
DISCARD ALL PRIOR DWGS