

phyCORE-T89C51CC01

Hardware Manual

Edition August 2001

In this manual are descriptions for copyrighted products that are not explicitly indicated as such. The absence of the trademark (™) and copyright (©) symbols does not imply that a product is not protected. Additionally, registered patents and trademarks are similarly not expressly indicated in this manual.

The information in this document has been carefully checked and is believed to be entirely reliable. However, PHYTEC Meßtechnik GmbH assumes no responsibility for any inaccuracies. PHYTEC Meßtechnik GmbH neither gives any guarantee nor accepts any liability whatsoever for consequential damages resulting from the use of this manual or its associated product. PHYTEC Meßtechnik GmbH reserves the right to alter the information contained herein without prior notification and accepts no responsibility for any damages which might result.

Additionally, PHYTEC Meßtechnik GmbH offers no guarantee nor accepts any liability for damages arising from the improper usage or improper installation of the hardware or software. PHYTEC Meßtechnik GmbH further reserves the right to alter the layout and/or design of the hardware without prior notification and accepts no liability for doing so.

© Copyright 2001 PHYTEC Meßtechnik GmbH, D-55129 Mainz.

Rights - including those of translation, reprint, broadcast, photomechanical or similar reproduction and storage or processing in computer systems, in whole or in part - are reserved. No reproduction may occur without the express written consent from PHYTEC Meßtechnik GmbH.

	EUROPE	NORTH AMERICA
Address:	PHYTEC Technologie Holding AG Robert-Koch-Str. 39 D-55129 Mainz GERMANY	PHYTEC America LLC 255 Ericksen Avenue NE Bainbridge Island, WA 98110 USA
Ordering Information:	+49 (800) 0749832 order@phytec.de	1 (800) 278-9913 info@phytec.com
Technical Support:	+49 (6131) 9221-31 support@phytec.de	1 (800) 278-9913 support@phytec.com
Fax:	+49 (6131) 9221-33	1 (206) 780-9135
Web Site:	http://www.phytec.de	http://www.phytec.com

1st Edition: August 2001

Preface	1
1 Introduction	3
1.1 Block Diagram.....	6
1.2 View of the phyCORE-T89C51CC01	6
2 Pin Description.....	7
3 Jumpers	13
3.1 J1 Internal or External Program Memory	15
3.2 J2 Remote Download Source.....	15
3.3 J3 Serial Interface	16
3.4 J4 TC Interrupt Output.....	16
3.5 J5, J6 Configuration of P1.6 and P1.7 for I ² C Bus	17
3.6 J7 RS-485 Interface Control	17
3.7 J8, J9 A/D Reference Voltage	18
3.8 J10 External Memory Access	18
3.9 J11, J12 CAN Interface	19
3.10 J14 P3.1 as TxD Signal.....	20
4 Memory Models	21
4.1 Control Register 1.....	23
4.2 Control Register 2.....	27
4.3 Address Register.....	30
4.4 Mask Register	31
5 Serial Interfaces	35
5.1 RS-232 Interface.....	35
5.2 RS-485 Interface.....	35
5.3 CAN Interface.....	36
6 Flash Memory	37
6.1 On-Board Flash Memory (U8)	37
6.2 On-Chip Flash Memory.....	39
7 Real-Time Clock RTC-8563 (U10).....	40
8 Reset Controller (U2)	41
9 Remote Supervisory Chip (U11)	42
10 Battery Buffer	43
11 Technical Specifications.....	45

12	Hints for Handling the Module	47
13	The phyCORE-T89C51CC01 on the phyCORE Development Board LD 5V.....	49
13.1	Concept of the phyCORE Development Board LD 5V	49
13.2	Development Board LD 5V Connectors and Jumpers	51
13.2.1	Connectors.....	51
13.2.2	Jumpers on the phyCORE Development Board LD 5V	52
13.2.3	Unsupported Features and Improper Jumper Settings ..	54
13.3	Functional Components on the phyCORE Development Board LD 5V	55
13.3.1	Power Supply at X1.....	55
13.3.2	Starting FlashTools	57
13.3.3	First Serial Interface at Socket P1A	59
13.3.4	Socket P1B	60
13.3.5	CAN Interface at Plug P2A.....	62
13.3.6	RS-485 Interface at Plug P2B	68
13.3.7	Programmable LED D3.....	70
13.3.8	Pin Assignment Summary of the phyCORE, the Expansion Bus and the Patch Field.	71
13.3.9	Battery ConnectorBAT1.....	76
13.3.10	DS2401 Silicon Serial Number	77
13.3.11	Pin Header Connector X4	78
	Index.....	79

Index of Figures and Tables

Figure 1: Block Diagram.....	6
Figure 2: View of the phyCORE-T89C51CC01	6
Figure 3: Numbered Matrix Overview of the phyCORE-Connector (Viewed From Above).....	9
Figure 4: Pinout of the phyCORE-T89C51CC01 (Top View)	10
Figure 5: Numbering of the Jumper Pads.....	13
Figure 6: Location of the Jumpers (Top View).....	13
Figure 7: Default Memory Model following a Hardware Reset	22
Figure 8: Memory Model for Flash Programming.....	24
Figure 9: Configuration of the I/O Area	28
Figure 10: Example of a Memory Model.....	33
Figure 11: Memory Areas of the Flash Device	38
Figure 12: Physical Dimensions (Not Shown at Scale)	45
Figure 13: Modular Development and Expansion Board Concept with the phyCORE-T89C51CC01	50
Figure 14: Location of Connectors on the phyCORE Development Board LD 5V	51
Figure 15: Numbering of Jumper Pads	52
Figure 16: Location of the Jumpers (View of the Component Side)	53
Figure 17: Default Jumper Settings of the phyCORE Development Board LD 5V with phyCORE-T89C51CC01	53
Figure 18: Connecting the Supply Voltage at X1	56
Figure 19: Pin Assignment of the DB-9 Socket P1A as RS-232 (Front View)	59
Figure 20: Pin Assignment of the DB-9 Socket P1B (Front View)	60
Figure 21: Pin Assignment of the DB-9 Plug P2A (CAN Transceiver on phyCORE-T89C51CC0, Front View).....	62
Figure 22: Pin Assignment of the DB-9 Plug P2A (CAN Transceiver on Development Board)	64
Figure 23: Pin Assignment of the DB-9 Plug P2A (CAN Transceiver on Development Board with Galvanic Separation)	67

Figure 24: Pin Assignment of the DB-9 Plug P2B as RS-485 Interface	68
Figure 25: Pin Assignment Scheme of the Expansion Bus.....	72
Figure 26: Pin Assignment Scheme of the Patch Field.....	72
Figure 27: Connecting the DS2401 Silicon Serial Number	78
Figure 28: Pin Assignment of the DS2401 Silicon Serial Number.....	78
Table 1: Pinout of the phyCORE-Connector.....	12
Table 2: Jumper Settings Overview.....	14
Table 3: J1 Code Fetch Selection	15
Table 4: J2 Remote Download Source Configuration.....	15
Table 5: J3 Serial Interface Configuration	16
Table 6: J4 RTC Interrupt Configuration	16
Table 7: J5 and J6 I ² C Bus Configuration	17
Table 8: J7 RS-485 Interface Control Configuration	17
Table 9: J8 and J9 A/D Converter Reference Voltage	18
Table 10: J10 External Memory Access	18
Table 11: J11 and J12 CAN Interface Configuration.....	19
Table 12: J14 Port P3.1 Configuration	20
Table 13: Control Register 1 of the Address Decoder.....	23
Table 14: Control Register 2 of the Address Decoder.....	27
Table 15: Address Register of the Address Decoder.....	30
Table 16: Mask Register of the Address Decoder	31
Table 17: Example of Address Decoder Functions	32
Table 18: Improper Jumper Settings for the Development Board.....	54
Table 19: JP9 Configuration of the Main Supply Voltage VCCI.....	55
Table 20: JP9 Improper Jumper Settings for the Main Supply Voltage	56
Table 21: JP28 Configuration of the Boot Button.....	57
Table 22: JP28 Configuration of a Permanent FlashTools Start Condition	58
Table 23: JP22, JP23, JP10 Configuration of Boot via RS-232	58
Table 24: Improper Jumper Settings for Boot via RS-232	58
Table 25: Jumper Configuration for the RS-232 Interface.....	59
Table 26: Jumper Configuration of the DB-9 Socket P1B.....	60
Table 27: Improper Jumper Settings for Configuration of P1B	61

Table 28: Jumper Configuration for CAN Plug P2A using the CAN Transceiver on the phyCORE-T89C51CC01.....	62
Table 29: Improper Jumper Settings for the CAN Plug P2A (CAN Transceiver on phyCORE-T89C51CC01).....	63
Table 30: Jumper Configuration for CAN Plug P2A using the CAN Transceiver on the Development Board.....	64
Table 31: Improper Jumper Settings for the CAN Plug P2A (CAN Transceiver on the Development Board).....	65
Table 32: Jumper Configuration for CAN Plug P2A using the CAN Transceiver on the Development Board with Galvanic Separation.....	66
Table 33: Improper Jumper Settings for the CAN Plug P2A (CAN Transceiver on Development Board with Galvanic Separation)	67
Table 34: Jumper Configuration for DB-9 Plug P2B as RS-485 Interface.....	68
Table 35: Improper Jumper Settings for the RS-485 Interface at Plug P2B	69
Table 36: JP17 Configuration of the Programmable LED D3.....	70
Table 37: Pin Assignment Data/Address Bus for the phyCORE-T89C51CC01 / Development Board / Expansion Board.....	73
Table 38: Pin Assignment Control Signals for the phyCORE-T89C51CC01/ Development Board / Expansion Board.....	74
Table 39: Pin Assignment Interface Signals for the phyCORE-T89C51CC01 / Development Board / Expansion Board.....	74
Table 40: Pin Assignment Power Supply for the phyCORE-T89C51CC01 / Development Board / Expansion Board.....	75
Table 41: Unused Pins on the phyCORE-T89C51CC01 / Development Board / Expansion Board	76
Table 42: JP19 JumperConfiguration for Silicon Serial Number Chip	77

Preface

This phyCORE-T89C51CC01 Hardware Manual describes the board's design and functions. Precise specifications for the T89C51CC01 microcontroller can be found in the enclosed microcontroller Data Sheet/User's Manual. If software is included please also refer to additional documentation for this software.

In this hardware manual and in the attached schematics, low active signals are denoted by a "/" in front of the signal name (i.e.: /RD). A "0" indicates a logic-zero or low-level signal, while a "1" represents a logic-one or high-level signal.

Declaration of Electro Magnetic Conformity for the PHYTEC phyCORE-T89C51CC01



PHYTEC Single Board Computers (henceforth products) are designed for installation in electrical appliances or as dedicated Evaluation Boards (i.e.: for use as a test and prototype platform for hardware/software development) in laboratory environments.

Note:

PHYTEC products lacking protective enclosures are subject to damage by Electro Static Discharge (ESD) and, hence, may only be unpacked, handled or operated in environments in which sufficient precautionary measures have been taken in respect to ESD dangers. It is also necessary that only appropriately trained personnel (such as electricians, technicians and engineers) handle and/or operate these products. Moreover, PHYTEC products should not be operated without protection circuitry if connections to the product's pin header rows are longer than 3 m.

PHYTEC products fulfill the norms of the European Union's Directive for Electro Magnetic Conformity only in accordance to the descriptions and rules of usage indicated in this hardware manual (particularly in respect to the pin header row connectors, power connector and serial interface to a host-PC).

Implementation of PHYTEC products into target devices, as well as user modifications and extensions of PHYTEC products, is subject to renewed establishment of conformity to, and certification of, Electro Magnetic Directives. Users should ensure conformance following any modifications to the products as well as implementation of the products into target systems.

The phyCORE-T89C51CC01 is one of a series of PHYTEC Single Board Computers (SBCs) that can be populated with different controllers and, hence, offers various functions and configurations. PHYTEC supports all common 8- and 16-bit controllers in two ways:

- (1) as the basis for Rapid Development Kits which serve as a reference and evaluation platform
- (2) as insert-ready, fully functional micro- / mini- and phyCORE OEM modules which can be embedded directly into the user's peripheral hardware design.

PHYTEC's microcontroller modules allow engineers to shorten development horizons, reduce design costs and speed project concepts from design to market.

1 Introduction

The phyCORE-T89C51CC01 belongs to PHYTEC's phyCORE Single Board Computer (SBC) module family. The phyCORE SBCs represent the continuous development of PHYTEC Single Board Computer technology. Like its mini-, micro- and nanoMODUL predecessors, the phyCORE boards integrate all core elements of a microcontroller system on a subminiature board and are designed in a manner that ensures their easy expansion and embedding in peripheral hardware developments.

As independent research indicates that approximately 70 % of all Electro Magnetic Interference (EMI) problems stem from insufficient supply voltage grounding of electronic components in high frequency environments, the phyCORE board design features an increased pin package. The increased pin package allows dedication of approximately 20 % of all pin header connectors on the phyCORE boards to Ground. This improves EMI and EMC characteristics and makes it easier to design complex applications meeting EMI and EMC guidelines using phyCORE boards even in high noise environments.

phyCORE modules achieve their small size through advanced SMD technology and multi-layer design. In accordance with the complexity of the module, 0402-packaged SMD and laser-drilled Microvias components are used on the boards, providing phyCORE users with access to this cutting edge miniaturization technology for integration into their own design.

The phyCORE-T89C51CC01 is a subminiature (55 x 44 mm) insert-ready Single Board Computer populated with the Atmel Wireless and Microcontrollers T89C51CC01 microcontroller featuring on-chip 2.0B CAN and on-chip Flash. Its universal design enables its insertion in a wide range of embedded applications.

All controller signals and ports extend from the controller to standard-width (2.54 mm / 0.1 in.) pin header rows aligning two sides of the board, allowing it to be plugged like a "big chip" into a target application.

Precise specifications for the controller populating the board can be found in the applicable controller User's Manual or Data Sheet. The descriptions in this manual are based on the Atmel W&M T89C51CC01 microcontroller. No description of compatible microcontroller derivative functions is included, as such functions are not relevant for the basic functioning of the phyCORE-T89C51CC01.


The phyCORE-T89C51CC01 offers the following features:

- subminiature Single Board Computer (55 x 44 mm) achieved through advanced SMD technology
- populated with the Atmel W&M T89C51CC01 microcontroller (PLCC-44 packaging) featuring 2.0A and 2.0B CAN
- instruction cycle time of 300 ns at 20 MHz clock speed in X2 mode (standard)
- PLCC socketed controller enables easy emulator connectivity (optional soldered controller)
- improved interference safety achieved through multi-layer PCB technology and dedicated Ground pins
- controller signals and ports extend to standard-width (2.54 mm) pins aligning two sides of the board, enabling it to be connectorged like a "big chip" into target applications
- 32 kByte on-chip Flash enabling In-System Programming (ISP)
- 128 to 512 kByte external Flash on-board¹, enabling In-System Programming (ISP) with PHYTEC FlashTools
- no dedicated Flash programming voltage required through use of 5 V Flash devices
- 128 kByte external SRAM on-board (SMD)¹
- flexible software-configurable address decoding via a complex logic device
- bank latches for Flash and SRAM integrated in address decoder
- RS-232 or RS-485 interface, user-configurable
- CAN interface with on-board CAN transceiver
- I²C Real-Time Clock with internal quartz
- Watchdog device for reset logic and battery control
- Remote Supervisory Circuit²
- 3 free Chip-Select signals for easy connection of peripheral devices
- requires single 5 V / < 150 mA supply voltage

¹: North America: Support Hotline: + 1-800-278-9913 • <http://www.phytec.com>
Europe: Support Hotline: 0 800-0-749-832 • <http://www.phytec.de>

²: This feature is under development and not available yet.

1.1 Block Diagram

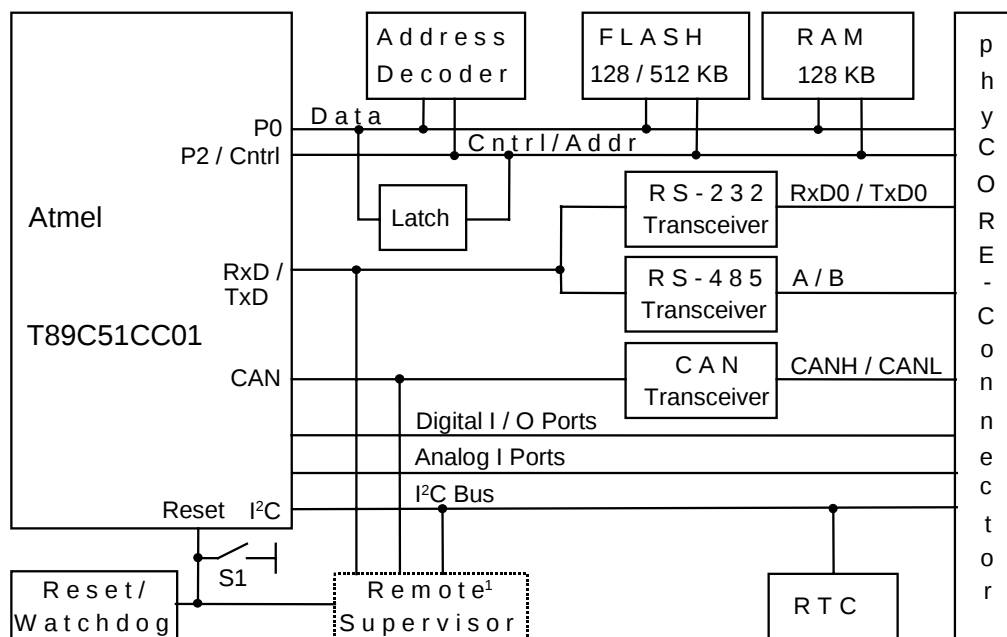

¹: This feature is under development and is not available yet.

Figure 1: Block Diagram

1.2 View of the phyCORE-T89C51CC01

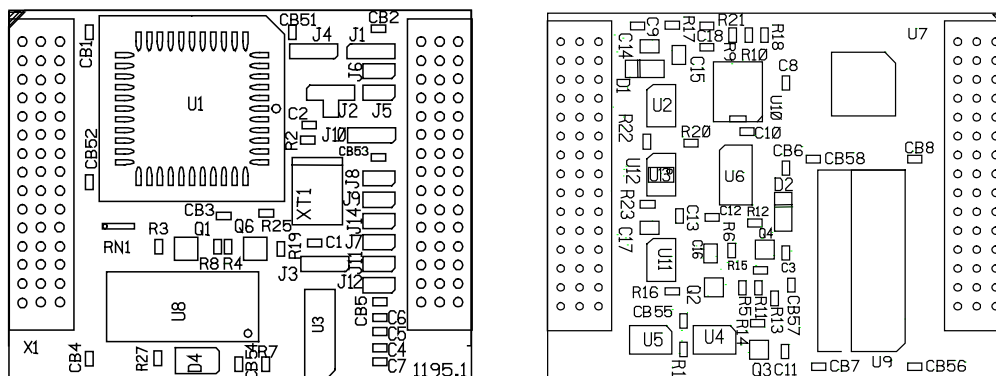


Figure 2: View of the phyCORE-T89C51CC01

2 Pin Description

Please note that all module connections are not to exceed their expressed maximum voltage or current. Maximum signal input values are indicated in the corresponding controller User's Manual/Data Sheets located on the Spectrum CD. As damage from improper connections varies according to use and application, it is the user's responsibility to take appropriate safety measures to ensure that the module connections are protected from overloading through connected peripherals.

As *Figure 4* indicates, all controller signals extend to standard-width (2.54 mm / 0.1 in.) pin rows lining two sides the board (referred to as phyCORE-connector). This allows the phyCORE-T89C51CC01 to be plugged into any target application like a "big chip".

A new numbering scheme for the pins on the phyCORE-connector has been introduced with the phyCORE specifications. This enables quick and easy identification of desired pins and minimizes errors when matching pins on the phyCORE module with the receptacle socket on the appropriate PHYTEC phyCORE Development Board LD 5V or your OEM application.

The numbering scheme for the phyCORE-connector is based on a two dimensional matrix in which column positions are identified by a letter and row position by a number. Pin 1A, for example, is always located in the upper left hand corner of the matrix. The pin numbering values increase moving down on the board. Lettering of the pin connector rows progresses alphabetically from left to right (*refer to Figure 3*).

The numbered matrix can be aligned with the phyCORE-T89C51CC01 (viewed from above; phyCORE-connector header pins pointing down) or with the socket of the phyCORE Development Board LD 5V / target circuitry.

The upper left-hand corner of the numbered matrix (Pin 1A) is thus covered with the corner of the phyCORE-T89C51CC01 marked with a white triangle. The numbering scheme is always in relation to the PCB as viewed from above, even if all contacts extend to the bottom of the board.

The numbering scheme is thus consistent for both the module's phyCORE-connector as well as mating connectors on the phyCORE Development Board LD 5V or target hardware, thereby considerably reducing the risk of pin identification errors.

Since the pins are exactly defined according to the numbered matrix previously described, the phyCORE-connector's receptacle socket is usually assigned a single designator for its position (X1 for example). In this manner the phyCORE-connector comprises a single, logical unit regardless of the fact that it could consist of more than one physical connector. The location of row 1 on the board is marked by a white triangle on the PCB to allow easy identification.

The following figure (*Figure 3*) illustrates the numbered matrix system. It shows a phyCORE-T89C51CC01 mounted on a phyCORE Development Board LD 5V. The shaded area of the phyCORE-connectors shown below indicates the remaining pins not used in conjunction with the phyCORE-T89C51CC01 which, when plugged onto the Development Board, does not span the entire length of the receptacle socket. The phyCORE Development Board LD 5V can house all phyCORE modules with standard-width (2.54 mm/ 0.10 in) pin header rows and a maximum of 32 pins per pin header row, A, B, C, D, E and F.

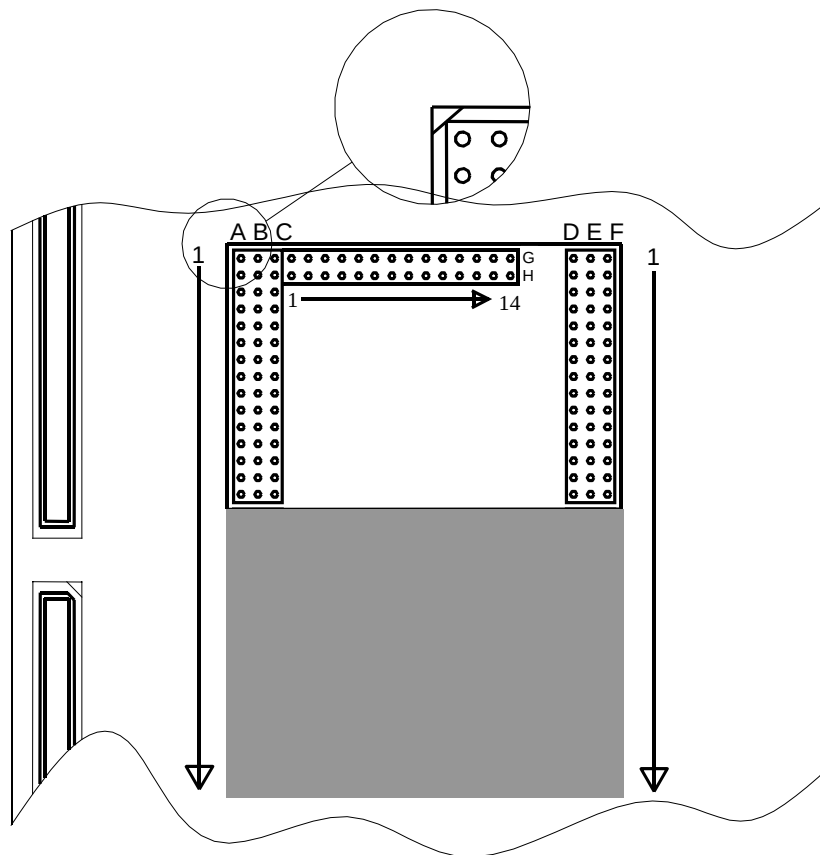


Figure 3: Numbered Matrix Overview of the phyCORE-Connector (Viewed From Above)

Many of the controller port pins accessible at header pins along the edges of the board have been assigned alternate functions that can be activated via software.

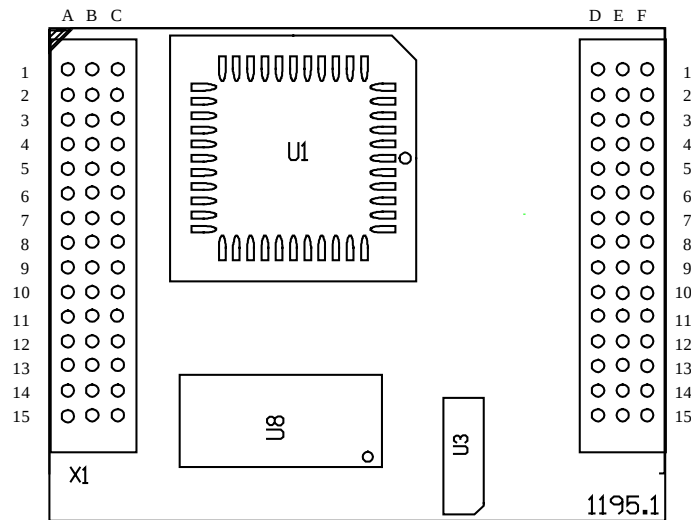


Figure 4: Pinout of the phyCORE-T89C51CC01 (Top View)

Table 1 provides an overview of the pinout of the phyCORE-connector and shows possible alternative functions of the pins. Please refer to the microcontroller User's Manual/Data Sheet for details on the functions and features of controller signals and port pins.

Pin Number	Signal	I/O	Description
Pin Row X1A			
1A	ClkIn	I	Optional external clock generator input connected directly to XTAL1 of μ C
2A	P3.3/INT1	I/O	Port pin μ C
3A	P3.5/T1	I/O	Port pin μ C
4A	/CS2	O	Pre-decoded Chip-Select signal #2
5A	/RD	O	/RD signal
6A, 7A, 8A, 9A, 10A, 11A, 12A	A0, A3, A5, A7, A10, A12, A15	O	Address bus from address latch (A0, A3, A5, A7, A10, A12, A15)
13A, 14A, 5A	AD1, AD3, AD6	O	Multiplexed address/data bus from μ C
Pin Row X1B			
1B	ClkOut	O	Optional external clock generator output connected directly to XTAL2 of μ C
2B, 3B, 5B, 7B, 8B, 10B, 12B, 13B, 15B	GND	-	Ground 0 V
4B	ALE	O	Address Latch Enable output μ C
6B, 9B, 11B	A1, A8, A13	O	Address bus from address latch (A1; A8; A13)
14B	AD4	I/O	Multiplexed address/data bus from μ C
Pin Row X1C			
1C, 2C	P3.2 / /INT0, P3.4 / T0	I/O	Port pins μ C
3C, 4C	/CS1, /CS3	O	Pre-decoded Chip-Select signal #1, #3
5C	/WR, P3.6	I/O	/WR signal μ C
6C, 7C, 8C, 9C, 10C, 11C	A2, A4, A6, A9, A11, A14	O	Address bus from address latch (A2; A4; A6; A9; A11; A14)
12C, 13C, 4C, 15C	AD0, AD2, AD5, AD7	I/O	Multiplexed address/data bus μ C

Pin Number	Signal	I/O	Description
Pin Row X1D			
1D	VCC	-	Voltage input +5 V =
2D, 3D	NC	-	Not used
4D	VBAT	I	Input for connection to external buffer battery (+)
5D	WDI	I	WDI input of the Reset controller
6D	BOOT	I	Boot = 1 during Reset → starts the Boot sequence
7D, 8D, 9D, 10D, 11D	P1.0 (RxDC), P1.1 (TxDC), P1.3, P1.6 (SCL), P3.0 (RxD)	I/O	Port pins of the microcontroller
12D, 13D	TxDC/P4.0, RxDC/P4.1	O	Port pins of the microcontroller, alternative: CAN_TTL
14D	CANL	I/O	CANL signal of the CAN transceiver
15D	CANH	I/O	CANH signal of the CAN transceiver
Pin Row X1E			
1E	VCC	-	Voltage input + 5 V
2E, 3E	NC	-	Not used
4E	VPD	O	Voltage output for external buffer (+)
5E, 7E, 8E, 10E, 12E, 13E, 15E	GND	-	Ground 0 V
6E	/RESET	O	Reset output of the module, directly connected with Reset input
9E, 11E	P1.4 (AN4), P3.1 (TxD)	I/O	Port pins of the microcontroller
14E	A	I/O	Differential A signal of the RS-485 transceiver
Pin Row X1F			
1F, 2F, 3F	GND	-	Ground 0 V
4F	PFI	I	Power Fail Input of Reset IC
5F	/PF0	O	Power Fail Output of Reset IC
6F	/RESin	I	Reset input of the module
7F	NC	-	Not used
8F, 9F, 10F	P1.2 (AN2), P1.5 (AN4), P1.7 (SDA)	I/O	Port pins of the microcontroller
11F	VAGND	-	Analog GND (connected to GND via J9)
12F	VAREF	-	Reference voltage (connected to VCC via J8)
13F	B	I/O	Differential B signal of the RS-485 transceiver
14F	TxD0	O	Transmit output of the RS-232 transceiver
15F	RxD0	I	Receive input of the RS-232 transceiver

Table 1: Pinout of the phyCORE-Connector

3 Jumpers

For configuration purposes, the phyCORE-T89C51CC01 has 13 solder jumpers, some of which have been installed prior to delivery.

Figure 5 illustrates the numbering of the jumper pads, while Figure 6 indicates the location of the jumpers on the board. All solder jumpers (Jxx) are located on the top side of the phyCORE-T89C51CC01.

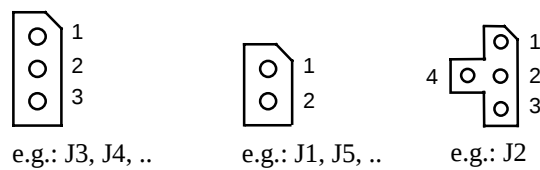


Figure 5: Numbering of the Jumper Pads

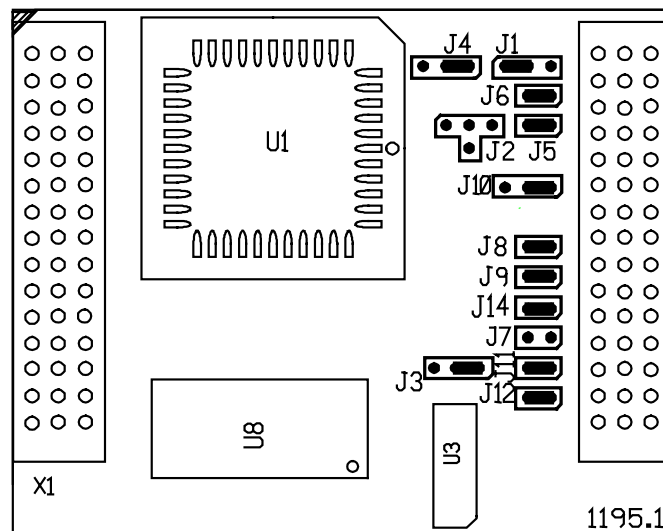


Figure 6: Location of the Jumpers (Top View)

The jumpers (J = solder jumper) have the following functions:

	Default Setting	Alternative Setting
J1	(1+2) external ROM/ Flash active	(2+3) internal ROM/Flash active
J2	(open) Remote Boot ¹ disabled	(2+1) I ² C for Remote Boot (2+3) CAN for Remote Boot (2+4) RS-232 / RS-485 for Remote Boot
J3	(1+2) RxD from RS-232	(2+3) RxD from RS-485
J4	(1+2) RTC interrupt on /INT0	(2+3) RTC interrupt on /INT1
J5, J6	(closed) I ² C RTC connected to controller	(open) I ² C RTC disconnected from controller
J7	(open) RS-485 not active	(closed) P1.5 activates RS-485
J8, J9	(closed) V _{AREF} and V _{AGND} derived from on-board reference voltage converter (3.0 V) and GND	(open) V _{AREF} and V _{AGND} derived from external voltage source via phyCORE-connector (X1F12/X1F11)
J10	(2+3) PLD and external memory active	(1+2) PLD and external memory disabled
J11, J12	(closed) on-board CAN transceiver connected to P4.0 and P4.1	(open) an external CAN transceiver can be attached or P4.0 and P4.1 are available as standard I/O at X1D12 and X1D13
J14	(closed) on-board RS-232 / 485 transceiver on P3.1	(open) port P3.1 is available as standard I/O at X1E11

Table 2: Jumper Settings Overview

¹: The Remote Supervisor IC is under development. Hence Jumper J2 has no function at this time and remains open.

3.1 J1 Internal or External Program Memory

At the time of delivery, Jumper J1 is closed at pads 1+2. This default configuration means that the program stored in the external program memory (Flash) is executed after a hardware reset. In order to allow the execution of any code stored in the controller's on-chip memory, Jumper J1 must be closed at pads 2+3.

The following configurations are possible:

Code Fetch Selection	J1
from external program memory	1 + 2*
from internal program memory	2 + 3

*= Default setting

Table 3: J1 Code Fetch Selection

3.2 J2 Remote Download Source

Space U8 on the module is intended to be populated by a Remote Supervisory Chip¹. This IC can initiate a boot sequence via various serial interfaces (*refer to section 9*). Jumper J2 is reserved for future use and remains open as default.

The following configurations are possible:

Download Source	J2
Not available	open*
I ² C – SDA	1 + 2
CAN – Rx/D	2 + 3
RS-232 / RS-485 – Rx/D	2 + 4

*= Default setting

Table 4: J2 Remote Download Source Configuration

¹: The Remote Supervisor IC is under development. Hence Jumper J2 has no function at this time.

3.3 J3 Serial Interface

Jumper J3 connects the controller RxD0 input port P3.0 to the on-board RS-232 or RS-485 transceiver. Optionally, P3.0/RxD can be used as standard I/O at pin X1D11 of the phyCORE-connector. This requires opening Jumper J3.

The following configurations are possible:

P3.0 - Serial Interface	J3
P3.0 as RS-232	1 + 2*
P3.0 as RS-485	2 + 3
P3.0 as port pin	open

*= Default setting

Table 5: J3 Serial Interface Configuration

3.4 J4 TC Interrupt Output

Jumper J4 determines if the interrupt output of the RTC (U11) extends to port 3.2 or to port 3.3. Alternatively, these port pins can be used as standard I/O signals at pins X1C1 and X1A2 of the phyCORE-connector. This requires opening Jumper J4.

The following configurations are possible:

RTC Interrupt Output	J4
Interrupt output is connected to port 3.2 (/INT0)	1 + 2*
Interrupt output is connected to port 3.3 (/INT1)	2 + 3
P3.2 and P3.3 available as port pins	open

*= Default setting

Table 6: J4 RTC Interrupt Configuration

3.5 J5, J6 Configuration of P1.6 and P1.7 for I²C Bus

One I²C interface device - a Real-Time Clock (RTC) at U10 - is available on the phyCORE-T89C51CC01. This device is connected via Jumpers J5 and J6 to port pins P1.6 and P1.7. Use of these pins as standard I/O requires opening the corresponding jumpers. *Refer to section 7 for details on this I²C interface device.*

The following configurations are possible:

I²C Bus Configuration	J5	J6
Port P1.7 used as I/O pin		open
Port P1.7 used as I ² C SDA		closed*
Port P1.6 used as I/O pin	open	
Port P1.6 used as I ² C SCL	closed*	

*= Default setting

Table 7: J5 and J6 I²C Bus Configuration

3.6 J7 RS-485 Interface Control

The transmission circuit of the RS-485 transceiver (U4) is disabled at time of delivery through a pull-up resistor (R14). Closing Jumper J7 enables control of the transceiver IC's transmit function via port 1.5 (P1.5 High → RS-485 inactive, P1.5 Low → RS-485 active).

The following configurations are possible:

RS-485 Interface Control Configuration	J7
P1.5 High → RS-485 transmitter inactive P1.5 Low → RS-485 transmitter active	closed
RS-485 transmitter inactive / P1.5 as port pin	open*

*= Default setting

Table 8: J7 RS-485 Interface Control Configuration

3.7 J8, J9 A/D Reference Voltage

The A/D converter of the phyCORE-T89C51CC01 requires a reference voltage (V_{AREF} , V_{AGND}) supplied to the controller. The source of the reference voltage can be chosen with Jumpers J8 and J9. With both jumpers closed, the on-board reference voltage converter (3.0 V) is connected to the controller and the module's GND potential is used as V_{AGND} . An external reference voltage with max. 3.0 V can be connected via the phyCORE-connector if the jumpers are open.

The following configurations are possible:

A/D Reference Voltage	J8	J9
External reference voltage (V_{AREF} at X1F12, V_{AGND} at X1F11)	open	open
3.0 V on-board reference voltage as V_{AREF}	closed*	
GND as V_{AGND}		closed*

*= Default settings

Table 9: J8 and J9 A/D Converter Reference Voltage

3.8 J10 External Memory Access

Jumper J10 can be used to connect the PLD input /PLD_RES to a low signal level. This configuration disables the controller's access to any external memory and allows for easy testing of the single-chip features of the T89C51CC01 controller.

The following configurations are possible:

External Memory Access	J10
External memory enabled	2 + 3*
Access to external memory disabled	1 + 2

*= Default settings

Table 10: J10 External Memory Access

3.9 J11, J12 CAN Interface

The CAN interface of the T89C51CC01 is available at port P4.0 and P4.1. These signals extend to the CAN transceiver populating U5 (e.g. PCA82C251), which generates the signals CANH (Pin X1D15) and CANL (Pin X1D14). These signals can be directly connected to a CAN bus using a dual-wire cable. This requires that Jumpers J11 and J12 are closed.

Direct access to the signals RxDC/P4.0 and TxDC/P4.1 is also available at the module's X1D13 and X1D12 pins if solder Jumpers J11 and J12 are open. This enables use of either an external CAN transceiver or use of P4.0 or P4.1 as standard I/O's.

For detailed descriptions of the CAN interface please refer to the appropriate controller User's Manual from Atmel W&M, as well as to the accompanying CAN transceiver Data Sheet.

The following configurations are possible:

CAN Transceiver	J11	J12
on-board CAN transceiver	closed*	closed*
External CAN transceiver or P4.0 and P4.1 as I/O	open	open

*= Default setting

Table 11: J11 and J12 CAN Interface Configuration

3.10 J14 P3.1 as TxD Signal

Jumper J14 determines whether P3.1 connects as a TxD signal line to the on-board RS-232 or RS-485 transceiver, or whether it is available as dedicated port pin P3.1 at pin X1E11 of the phyCORE-connector.

The following configurations are possible:

P3.1 Configuration	J14
P3.1 connected to the on-board RS-232 or RS-485 transceiver	closed*
P3.1 available for free use on X1E11	open

*= Default setting

Table 12: J14 Port P3.1 Configuration

4 Memory Models

The phyCORE-T89C51CC01 allows for flexible address decoding which can be configured by software to different memory models. A hardware reset activates a default memory configuration that is suitable for a variety of applications. However, this memory model can be changed or adjusted at the beginning of a particular application.

Configuration of the memory is done within the address decoder by means of 4 internal decoder registers: two Control Registers, one Address Register and one Mask Register. All registers are carried out as **write-only registers** with access through the controller's XDATA memory space. There are two distinct address areas - selectable by means of the bit IO-SW in Control Register 1 - by which the registers can be accessed (*refer to the description of the bit IO-SW below*). Due to a lack of read access, a copy of all register contents should be maintained within your application. Reserved bits may not be changed during the writing of the register; contents must remain at 0. A hardware reset erases all registers while preserving the configuration of the default memory model.

Note:

In the event that you use FlashTools – PHYTEC's proprietary firmware allowing convenient on-board Flash programming - the address FA16 is preset at the start of your application software (*refer to section 4.1, "Control Register 1"*). This is to be noted upon installation of the software copy of the register contents.

The following figure illustrates the default memory model:

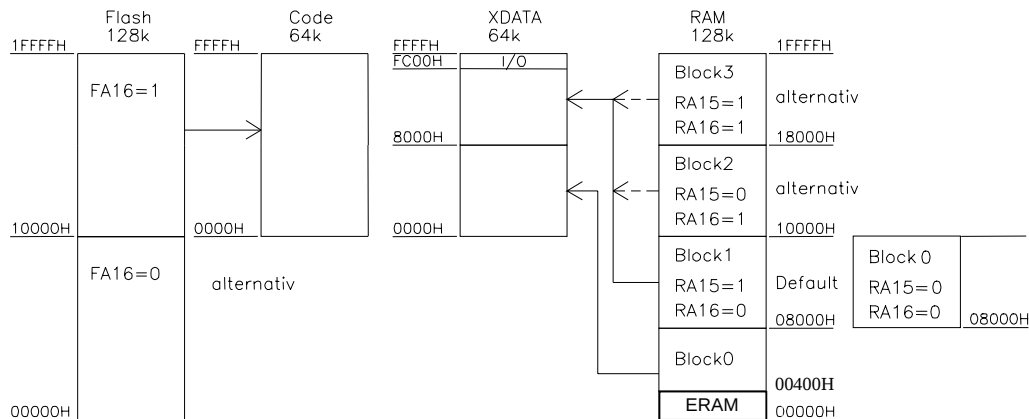


Figure 7: Default Memory Model following a Hardware Reset

If the phyCORE-T89C51CC01 is populated with a 128 kByte RAM device, blocks of 32 kByte each of the upper 96 kByte can be accessed and switched via bank latching. The corresponding I/O area is mapped to the XDATA memory space. Within this I/O area; there is no access to any available RAM.

Access to the internal ERAM of the T89C51CC01 is also possible within the XDATA memory space. Following a reset, this memory area is located between 0H and 400H. Access to the ERAM can be switched on or off using the bit EXTRAM in the microcontroller register AUXR. Please refer to the microcontroller User's Manual/Data Sheet for details on this function.

The following sections describe the address decoder's registers for configuration of the memory model.

4.1 Control Register 1

Control Register 1 (Address 7C00H / FC00H)							
Bit 7							Bit 0
PRG-EN	VN-EN	FA18	FA17	FA16 ¹	FA15	N/A ²	N/A
Default Values:							
Reset Value:				0000 1000 b			
Runtime Model:				0000 0000 b			

Table 13: Control Register 1 of the Address Decoder

Bit invalid in programming model (refer to PRG-EN)

Bit valid only in programming model (refer to PRG-EN)

PRG-EN: Can be used to activate the special Flash programming memory model (PRG-EN = 1). This model is used within the FlashTools³ for Flash programming purposes and is of limited use within user applications because of its special restrictions.

In this model, 32 kByte RAM located within the address area 0000H - 7FFFH is accessible, as well as 32 kByte Flash memory within the address area 8000H - FFFFH. The Flash memory can only be written in the XDATA memory space and can only be read from the CODE memory space. The RAM can be read and written in the XDATA memory space. RAM can also be read from the CODE memory space.

¹: If using FlashTools - a firmware allowing convenient on-board Flash programming - it should be noted that the bit FA16 will be preset at the start of user code. This is to be noted upon installation of the software copy of the register contents.

²: N/A: Not Accessible

³: The FlashTools firmware is pre-installed in the external Flash device upon delivery of the module.

The address line A15 of the Flash is derived from the Control Register 1 (Bit 0, FA15) only in the programming model. In the runtime configuration (PRG-EN = 0), the address line A15 of the controller leads directly to the Flash device.

The bit IO-SW is also relevant to the programming model; whereas the bit VN-EN is not relevant. The following figure illustrates the programming model (the I/O area is not represented):

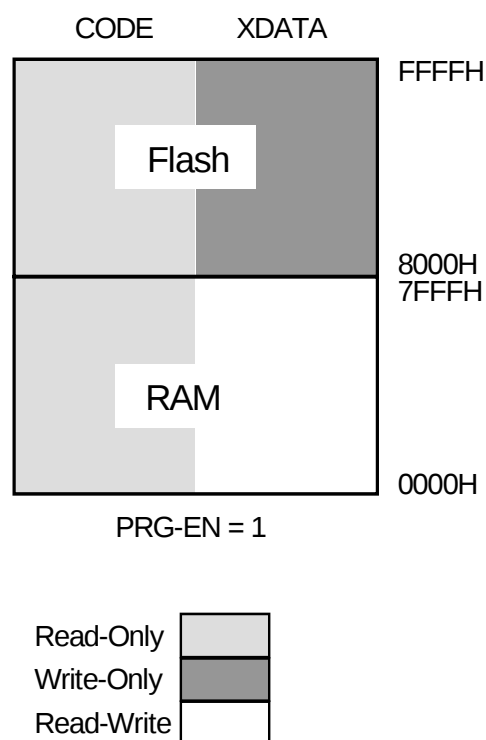


Figure 8: Memory Model for Flash Programming

VN-EN: This bit enables free selection of von Neumann memory¹ within the address space of the controller. Following a hardware reset, the Harvard² architecture is configured as default. The von Neumann memory is especially useful when programming code is to be downloaded and subsequently run during runtime, as is the case with a Monitor program. The location of the optional von Neumann memory areas is defined by the Address and Mask Registers (*see sections 4.3 and 4.4*).

Following a hardware reset (VN-EN = 0), the settings in the Address and Mask Registers are not released. The von Neumann memory is not available at this time. Setting bit VN-EN = 1 activates the Address and Mask Registers and incorporates their settings into access control for von Neumann memory areas. This bit is only relevant in the runtime model (PRG-EN = 0). In the programming model (PRG-EN = 1) bit VN-EN is unimportant and will be ignored.

¹: Memory space in which no difference is made between CODE and XDATA access. This means that both accesses use the same physical memory device, usually a RAM.

²: Memory space in which CODE and XDATA accesses use physical different memory devices. CODE access typically uses a ROM or Flash device, whereas XDATA access uses a RAM.

FA[18..15]: The phyCORE-T89C51CC01 can be optionally populated with a Flash device of 512 kByte capacity. Because of the limited 64 kByte address space of the T89C51CC01 microcontroller, the remainder of the Flash memory can only be accessed by bank switching.

In the runtime model (PRG-EN = 0), 64 kByte banks can be switched by controlling the upper address lines A[18..16] for the Flash through software. For this purpose, register bits FA[18..16] of the address decoder provide a latch to which the desired upper addresses can be written.

Of particular note is the bit FA15, which is solely relevant in the programming model (PRG-EN = 1). As in this model only 32 kByte of Flash can be accessed, it serves as address line A15 for the Flash memory. In the runtime model (PRG-EN = 0) with a 64 kByte Flash memory area, to contrast, the address line A15 of the controller is attached directly to the Flash.

The function of the bits FA[18..16] depends on the hardware configuration of the module. As described above, these bits are only relevant if the phyCORE-T89C51CC01 is populated with a Flash device of 512 kByte capacity.

4.2 Control Register 2

Control Register 2 (Address 7C01H / FC01H)							
Bit 7							Bit 0
IO-SW	N/A ¹	N/A	N/A	RA16	RA15	N/A	N/A
Default Values:							
Reset Value:				0000 0100 b			
Runtime Model:				0000 0100 b			

Table 14: Control Register 2 of the Address Decoder


IO-SW: By means of this bit, the I/O area of the module can be selectively mapped either to the upper or to the lower 32 kByte of the address space. With IO-SW=0 following a hardware reset, the I/O area is accessible in the range between FC00H-FFFFH. Setting bit IO-SW=1 maps the I/O area to 7C00H-7FFFH.

This I/O area generally consists of 4 blocks of 256 bytes each. In three of these blocks the address decoder provides a pre-decoded Chip-Select signal that simplifies the connection of peripheral hardware to the module.

These Chip-Select signals will be activated on read/write access to the XDATA memory space within the appropriate address range. The fourth block is reserved for internal access to the decoder's internal register (write-only access). This block is **not** available for use of connecting external devices.

¹: N/A: Not Accessible

The I/O area configuration is shown in the figure below:

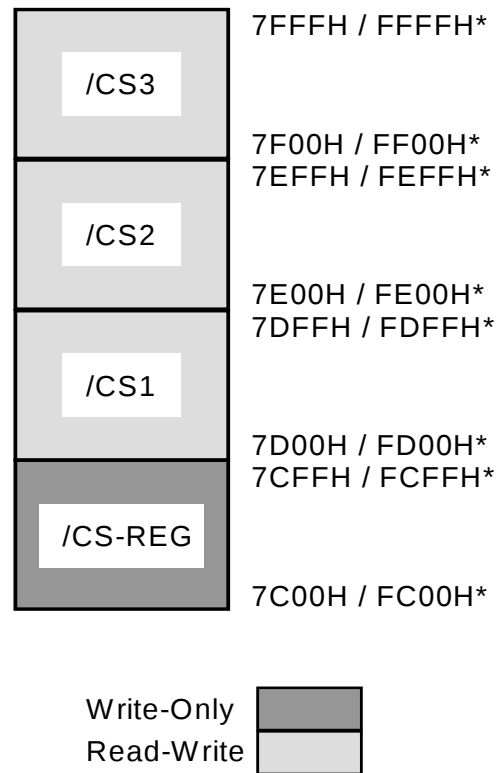

* = Default setting

Figure 9: Configuration of the I/O Area

The areas referred to as /CS1 to /CS3 are the freely available Chip-Select signals; while the signal /CS-REG is the decoder's internal signal. This latter signal is required to access the internal registers. This signal is not available to the user and no external circuitry should be connected within the address area valid for the /CS-REG signal. In order to ensure proper functioning of FlashTools¹ firmware, enabling on-board programming of the Flash memory, it is essential that the /CS-REG signal be used as described herein.

¹: Firmware portion of the utility program for on-board Flash programming and is pre-installed in the Flash at time of delivery.

These internal registers are located at address 7C00H-7C03H (IO-SW=1) or FC00H-FC03H (IO-SW=0). The rest of the /CS-REG block remains unused and is reserved for future expansion.

RA[16..15]: The module accommodates a 128 kByte RAM device. As the address space is limited to 64 kByte in the XDATA memory space of the controller, the remainder of the RAM can only be accessed by bank switching.

Three memory banks of 32 kByte banks can be switched by setting the high address lines A[16..15] through software. For this purpose, register bits RA[16..15] of the address decoder provides a latch to which the desired upper addresses can be written.

The lower RAM bank (bank0) is always accessible in the address range 0H-8000H. In the configuration RA15=0 and RA16=0 an image of RAM bank0 is available in the address range 8000H-FFFFH.

4.3 Address Register

The Address Register 7C02H / FC02H functions in conjunction with the Mask Register (see section 4.4) to define the von Neumann¹ and Harvard² memory area in the controller's memory space. By setting the bit VN-EN in Control Register 1, the values of the Address and the Mask Register become valid for the definition of von Neumann and Harvard memory areas and will be incorporated in address decoding. (refer to section 4.1, "Control Register 1")

The location of one or more Harvard memory areas can be configured with both registers. The remaining areas of the memory space are configured as von Neumann memory in which RAM is accessible in both XDATA and CODE memory space.

The mechanism for the memory space distinction is based on a comparison of the current address with a pre-defined address pattern of variable width. If the relevant bit positions of the address matches the pre-defined address pattern, memory access occurs according to the Harvard architecture. If the current address is different to the pre-defined address pattern, memory access occurs according to the von Neumann architecture.

Address Register (Addresses 7C02H / FC02H)							
Bit 7							Bit 0
HA15	HA14	HA13	HA12	Res. ³	Res.	Res.	Res.
Reset Value:				0000 0000 b			

Table 15: Address Register of the Address Decoder

-
- ¹: Memory space in which no difference exists between CODE and XDATA access. This means that both accesses use the same physical memory device, usually a RAM.
 - ²: Memory space in which CODE and XDATA accesses use different physical memory devices, usually CODE access uses a ROM or Flash device, whereas XDATA access uses a RAM.
 - ³: Reserved bits are not to be changed, the default value (0) must remain.
-

The Address Register holds the address pattern mentioned above. Each bit of the pattern is compared with the corresponding address line of the controller (HA15 with A15, ..., HA12 with A12). As address lines A15 .. A12 are used to define Harvard memory space, only Harvard areas of at least 4 kByte can be configured. Memory areas smaller than 4 kByte can not be configured.

4.4 Mask Register

The Mask Register (7C03H / FC03H) can be used to mask single bits in the Address Register (*see above*). Following a hardware reset, all bits within the Address Register are relevant. By setting the individual bits in the Mask Register, all corresponding bits in the Address Register will no longer be regarded in the address comparison.

Mask Register (Address 7C03H / FC03H)							
Bit 7							Bit 0
MA15	MA14	MA13	MA12	Res. ¹	Res.	Res.	Res.
Reset Value:				0000 0000 b			

Table 16: Mask Register of the Address Decoder

¹: Reserved bits are not to be changed, the default value (0) must remain.

The following examples of different combinations of the Address and Mask Registers illustrate these functions (only A15 to A8 are shown):


Address Reg.	Mask Reg.	Comments (only for VN-EN = 1)	
1XXX0000 B	01110000 b	Harvard von Neumann	8000H - FFFFH 0000H - 7FFFH
0XXX0000 B	01110000 b	Harvard von Neumann	0000H - 7FFFH 8000H - FFFFH
11110000 B	00000000 b	Harvard von Neumann	F000H - FFFFH 0000H - EFFFH
01X00000 B	00100000 b	Harvard von Neumann	4000H - 4FFFH 6000H - 6FFFH 0000H - 3FFFH 5000H - 5FFFH 7000H - FFFFH
10000000 B	00000000 b	Harvard von Neumann	8000H - 8FFFH 0000H - 7FFFH 9000H - FFFFH
101X0000 B	00010000 b	Harvard von Neumann	A000H - BFFFH 0000H - 9FFFH C000H - FFFFH

Table 17: Example of Address Decoder Functions

Reserved bits without function for address decoding
(refer to description of the register).

X = irrelevant (on account of a bit set in the Mask Register)

The last example from the above table is further illustrated by the following figure:

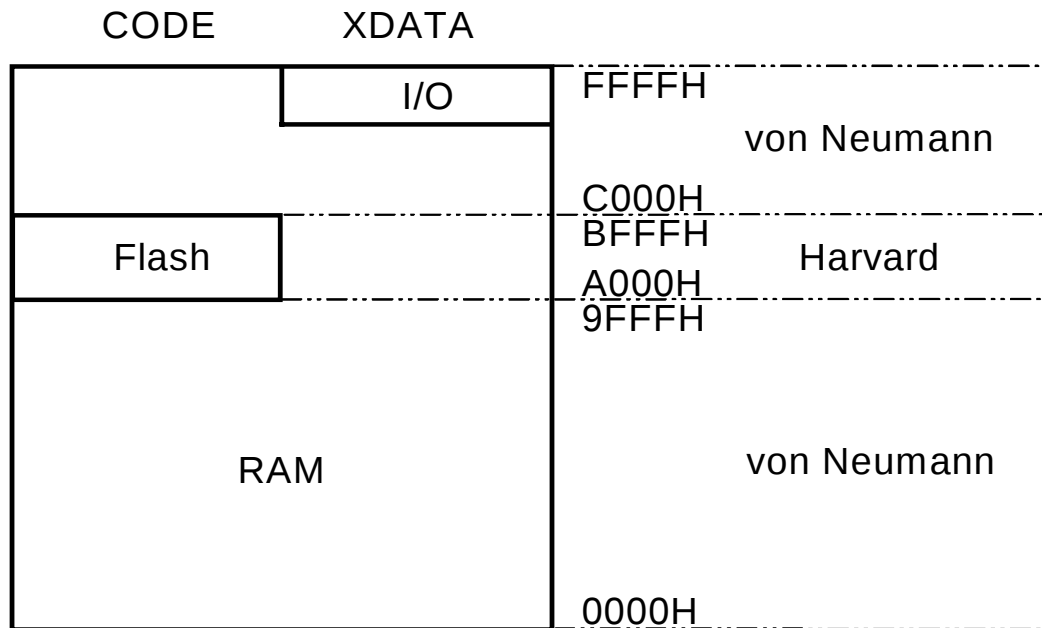

PRG-EN = 0

VN-EN = 1

IO-SW = 0

Addr. Reg. = 101X0000b

Mask Reg. = 00010000b

Figure 10: Example of a Memory Model

Following a hardware reset, the memory space is configured as Harvard memory. Only after setting the bit (VN-EN = 1), the settings in the Address and Mask Registers are valid and regarded in the address decoding.

5 Serial Interfaces

5.1 RS-232 Interface

An RS-232 transceiver is located on the phyCORE-T89C51CC01 at U3. This device adjusts the signal levels of the P3.0/RxD0 and P3.1/TxD0 lines. The RS-232 interface enables connection of the module to a COM port on a host-PC. In this instance, the RxD0 line (X1F15) of the transceiver is connected to the TxD line of the COM port; while the TxD0 line (X1F14) is connected to the RxD line of the COM port. The Ground potential of the phyCORE-T89C51CC01 circuitry needs to be connected to the applicable ground pin on the COM port as well.

The microcontroller's on-chip UART does not support handshake signal communication. However, depending on user needs, handshake communication can be software emulated using port pins on the microcontroller. Use of an RS-232 signal level in support of handshake communication requires use of an external RS-232 transceiver not located on the module.

5.2 RS-485 Interface

As an option to the RS-232 interface, a RS-485 interface can be configured on the phyCORE-T89C51CC01 using the lines P3.0/RxD and P3.1/TxD. Jumpers J3 and J14 enable selection between RS-232 and RS-485 interfaces (*see sections 3.3 and 3.10*).

The RS-485 transceiver (U4) supports up to 32 nodes in one bus system. Data transmission occurs via differential signal levels according to RS-485 interface standards.

Note:

To utilize the RS-485 interface, Jumper J7 must be closed. This enables control of the transmit function on the RS-485 transceiver IC via port 1.5 (*refer to section 3.6*).

5.3 CAN Interface

A CAN transceiver is populated at U5 on the phyCORE-T89C51CC01 module. This transceiver enables transmission and receipt of CAN signals via CANTx and CANRx, respectively. The CAN transceiver supports up to 110 nodes on a single CAN bus. Data transmission occurs with differential signals between CANH and CANL. A Ground connection between nodes on a CAN bus is not required, yet is recommended to better protect the network from electromagnetic interference (EMI). In order to ensure proper message transmission via the CAN bus, a 120 Ohm terminating resistor must be connected to each end of the CAN bus between the pins delivering the CANH and CANL signals.

For larger CAN networks, an external opto-coupler should be implemented to galvanically separate the CAN bus signals and the phyCORE-T89C51CC01 circuitry. This requires that the CANTx and CANRx lines be separated from the on-board CAN transceiver by opening Jumpers J11 und J12 (*refer to section 3.9*). The Hewlett Packard HCPL06xx or Toshiba TLP113 HCPL06xx fast opto-coupler is recommended. Parameters for configuring a proper CAN bus system are found in the DS102 norms from the CiA¹ (CAN in Automation) User and Manufacturer's Interest Group.

¹: CiA CAN in Automation – International User's and Manufacturer's Union, founded in March 1992. CiA offers technical, product- and market-related information on the topic of Controller Area Network, with the goal of increasing general knowledge about CAN and furthering future development of the CAN protocol.

6 Flash Memory

Flash, as non-volatile memory on the phyCORE-T89C51CC01, provides an easily reprogrammable means of code storage to the user. The phyCORE-T89C51CC01 provides an external Flash memory device as well as additional 32 kByte on-chip Flash memory on the controller.

6.1 On-Board Flash Memory (U8)

The phyCORE-T89C51CC01 can be populated at U8 by a single Flash device of type 29F010 with two banks of 64 kByte each or device type 29F040 with 8 banks of 64 kByte each.

Flash memory devices offer up to 100,000 reprogramming cycles, and enable on-board programming of user code. These Flash devices are programmable with 5 V. No dedicated programming voltage is required. All standard versions of the phyCORE-T89C51CC01 feature a programming utility firmware – FlashTools (*refer to applicable QuickStart Instruction for more details*) – resident in the Flash device.

This firmware enables on-board download, as well as subsequent erasure and reprogramming, of user code into the Flash with the help of an intuitive PC-side software. The FlashTools firmware portion resides in the initial 32 kByte of Flash memory, which is not available for storage of user code. The total memory available for user programs is 64 kByte (29F010) or 448 kByte (29F040) (*refer to Figure 11*).

Note:

Should the FlashTools firmware portion be erased from the Flash device without having a back-up or an equivalent replacement, reprogramming is no longer possible!

Please note that this firmware protects itself against any intentional or accidental erasure or overwriting. As the Flash device's hardware protection mechanism is not utilized, protection is limited to the software level. In the event that a user wishes to download his or her own programming algorithms or tools into the Flash, the user must ensure that a programming tool remains in the Flash memory. *Refer to the "QuickStart Instructions" for a detailed description of the on-board programming procedure.*

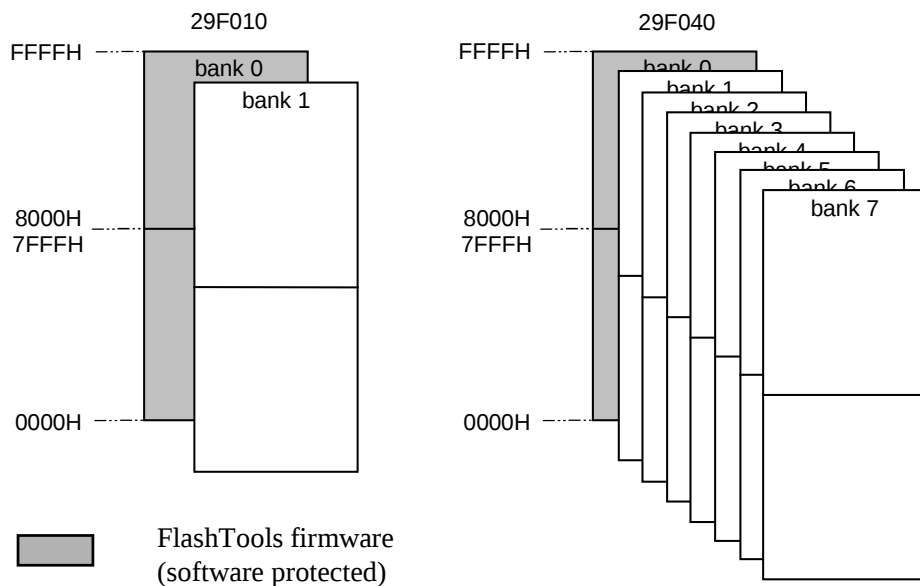


Figure 11: Memory Areas of the Flash Device

Use of a Flash device as the only code memory results in limited usability of the Flash as non-volatile memory for data. This is due to the internal structure of the Flash device as, during the Flash's internal programming process, the reading of data from Flash is not possible. For Flash programming, program execution must be transferred out of Flash (such as into von Neumann RAM). This usually equals the interruption of a "normal" program execution cycle.

As of the printing of this manual, Flash devices generally have a life expectancy of at least 100,000 erase/program cycles.

6.2 On-Chip Flash Memory

The phyCORE-T89C51CC01 module is populated with an Atmel Wireless & Microcontroller T89C51CC01 microcontroller featuring 32 kByte on-chip Flash memory supporting both InSystem-Programming (ISP) and In-Application-Programming (IAP). ISP enables programming of on-chip memory while the phyCORE module is implemented in a target hardware application. Removal of the module or microcontroller is hence not necessary for programming of the on-chip memory using a dedicated programming device. IAP enables programming of the microcontroller's on-chip memory while the application is running. The on-chip Flash memory offers both ISP and IAP features in addition to standard Flash program and erase capabilities. A supplemental loader program is not needed for ISP programming.

An intuitive PC-side software tool is available for download from Atmel Wireless & Microcontroller under <http://www.atmel-wm.com>. The "FLexible In-system Programmer" (FLIP) tool provides all necessary functions to erase and program the on-chip Flash and communicates with the target controller by means of an RS-232 interface. Communication with the FLIP tool requires the module to be in Flash programming mode (*refer to applicable section in the QuickStart Instructions for details*). Starting the on-chip Boot loader, in contrast to the FlashTools firmware, requires Jumper J1 closed at positions 2+3. *Refer to section 3.1 for details on Jumper J1 functions.*

Note:

Jumper J1 must be closed at positions 2+3 in order to start the on-chip Boot loader on the T89C51CC01 microcontroller.

The on-chip Flash memory is programmable with 5 V. Consequently, no dedicated programming voltage is required.

As of the printing of this manual, the on-chip Flash memory generally has a life expectancy of at least 1,000 erase/program cycles. The data sheet for the T89C51CC01 further guarantees data integrity of the code stored in Flash for a minimum of 10 years.

7 Real-Time Clock RTC-8563 (U10)

For real-time or time-driven applications the phyCORE-T89C51CC01 is equipped with an RTC-8563 Real-Time Clock (RTC) at U10. This RTC device provides the following features:

- serial input/output bus (I²C)
- power consumption
 - bus active: max. 50 mA
 - bus inactive, CLKOUT = 32 kHz : max. 1.7 μ A
 - bus inactive, CLKOUT = 0 kHz : max. 0.75 μ A
- clock function with four year calendar
- century bit for year 2000-compliance
- universal timer with alarm and overflow indication
- 24-hour format
- automatic word address incrementing
- programmable alarm, timer and interrupt functions

If the phyCORE-T89C51CC01 is connected to a battery buffer, the Real-Time Clock runs independently of the module's power supply.

Programming of the Real-Time Clock is done via the I²C bus (I²C address 1010001), connected to port P1.6 (SCL) and port P1.7 (SDA) on the controller. The Real-Time Clock also provides an interrupt output which extends to port P3.2 or P3.3 via Jumper J4. An interrupt occurs in case of a clock alarm, timer alarm, timer overflow and event counter alarm. All interrupts must then be cleared by software. With the interrupt function the Real-Time Clock can be utilized in various applications. For more information on the features of the RTC-8563, *refer to the corresponding Data Sheet located on the Spectrum CD.*

Note:

Following attachment of a power supply to the board, the RTC generates **no** interrupts, as the RTC is not yet initialized.

8 Reset Controller (U2)

The Reset Controller at U2 is used to generate a definite release of the Reset signal if the supply voltage VCC drops below 4.65 V. This ensures the proper start-up of the microcontroller. Furthermore, the Reset Controller can switch the voltage of a back-up battery as VPD to several IC's in case the main power supply becomes interrupted. The basic characteristics of this IC are described in the appropriate Data Sheet, which is available on the Spectrum CD.

All pins of the Reset Controller are routed to the phyCORE-connector. The VPD voltage is available on the OUT pin of the Reset Controller. In normal operation mode this pin is supplied by VCC (via a diode). Additionally, VBAT is routed via the voltage divider R20/R21 to pin PFI. If VBAT = 3.3 V, a voltage of 1.65 V is available at PFI. If the voltage at PFI drops below 1.25 V, the signal /PFO is released. The signals WDI and /PFO are available at the phyCORE-connector pins X1D5 and X1F5.

9 Remote Supervisory Chip (U11)

Space U11 is intended to be populated by an RSC1308 Remote Supervisory Chip. This IC can initiate a boot sequence via a serial interface, such as RS-232, RS-485 or I²C. The RSC can start PHYTEC FlashTools without requiring a manual reset of the phyCORE module via a Boot jumper or button. This enables a remote software update of the on-board Flash device.

This function can be controlled by various interfaces. Solder Jumper J2 configures the remote download source. The Remote Supervisory Chip is under development and not available at this time. Accordingly, Jumper J2 remains open in the default configuration. *Refer to section 3.2* for details on jumper settings for J2.

This feature will be available on future phyCORE modules.

10 Battery Buffer

The battery that buffers the memory is not essential to the functioning of the phyCORE-T89C51CC01. However, this battery buffer embodies an economical and practical means of storing nonvolatile data in SRAM and is necessary for data storage in the Real-Time Clock in case of a power failure.

The VBAT input at pin X1D4 of the module is provided for connecting the external battery. The negative polarity pin on the battery must be connected to GND on the phyCORE-T89C51CC01. As of the printing of this manual, a lithium battery is recommended as it offers relatively high capacity at low discharge. In the event of a power failure at VCC, the SRAM memory (U9) and the RTC (U10) will be buffered by a battery connected to VBAT.

Power consumption depends on the installed components and memory size. *Refer to the corresponding Data Sheets for the SRAM devices mounted on the phyCORE module (refer also to section 11, “Technical Specifications”).*

Note:

Be advised that despite the battery buffer, changes in the data content within the RAM can occur. The battery buffer does not completely remove the danger of data destruction.

11 Technical Specifications

The physical dimensions of the phyCORE-T89C51CC01 are represented in *Figure 12*. The module's profile (not including the pin header connectors) is approximately 11 mm thick, with a maximum component height of 3.5 mm on the back-side of the PCB and approximately 6 mm on the front-side. The PCB itself is approximately 1.5 mm thick.

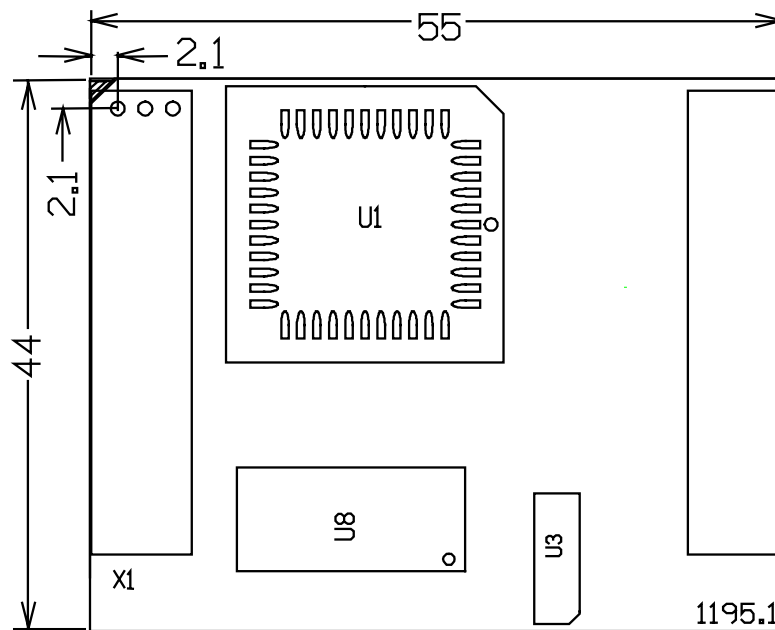


Figure 12: Physical Dimensions (Not Shown at Scale)

Additional specifications:

- Dimensions: 55 x 44 mm, ± 0.01 mm
- Weight: approximately 25 g with all optional components mounted on the module
- Storage temperature: -40°C to $+90^{\circ}\text{C}$
- Operating temperature: standard 0°C to $+70^{\circ}\text{C}$,
extended -40°C to $+85^{\circ}\text{C}$
- Humidity: maximum 95 % r.F. not condensed
- Operating voltage: 5 V ± 5 %, VBAT 3 V ± 20 %
- Power consumption: maximum 220 mA, typically 130 mA
at 20 MHz oscillator frequency and
128 kByte RAM at $+20^{\circ}\text{C}$
- Power consumption
with battery buffer: maximum 100 μA ,
typically 1 μA for RAM supply and
1 μA for Real-Time Clock supply
at $+20^{\circ}\text{C}$
- Delay Time /CS1- /CS3: 10 ns

These specifications describe the standard configuration of the phyCORE-T89C51CC01 as of the printing of this manual.

Please note that the module storage temperature is only 0°C to $+70^{\circ}\text{C}$ if a battery buffer is used for the RAM devices.

12 Hints for Handling the Module

If changing controllers please ensure that appropriate PLCC extraction tools are used and that the socket and all components remain free from intrusive damage.

Removal of the standard quartz or oscillator is not advisable given the compact nature of the module. Should this nonetheless be necessary, please ensure that the board, as well as surrounding components and sockets, remain undamaged while desoldering. Overheating the board can cause the solder pads to loosen, rendering the module inoperable. Carefully heat neighboring connections in pairs. After a few alternations, components can be removed with the solder-iron tip. Alternatively, a hot air gun can be used to heat and loosen the bonds.

13 The phyCORE-T89C51CC01 on the phyCORE Development Board LD 5V

PHYTEC Development Boards are fully equipped with all mechanical and electrical components necessary for the speedy and secure start-up and subsequent communication to and programming of applicable PHYTEC Single Board Computer (SBC) modules. Development Boards are designed for evaluation, testing and prototyping of PHYTEC Single Board Computers in laboratory environments prior to their use in customer designed applications.

13.1 Concept of the phyCORE Development Board LD 5V

The phyCORE Development Board LD 5V provides a flexible development platform enabling quick and easy start-up and subsequent programming of the phyCORE-T89C51CC01 Single Board Computer module. The Development Board design allows easy connection of additional expansion boards featuring various functions that support fast and convenient prototyping and software evaluation.

This modular development platform concept is depicted in *Figure 13* and includes the following components:

- The actual **Development Board** (1), which offers all essential components and connectors for start-up including: a power socket enabling connection to an **external power adapter** (2) and **serial interfaces** (3) of the SBC module at DB-9 connectors (depending on the module, up to two RS-232 interfaces and up to two RS-485 or CAN interfaces).
- All of the signals from the SBC module mounted on the Development Board extend to two mating receptacle connectors. A strict 1:1 signal assignment is consequently maintained from the phyCORE-connectors on the module to these expansion connectors. Accordingly, the pin assignment of the **expansion bus** (4) depends entirely on the pinout of the SBC module mounted on the Development Board.

- As the physical layout of the expansion bus is standardized across all applicable PHYTEC Development Boards, PHYTEC is able to offer various **expansion boards** (5) that attach to the Development Board at the expansion bus connectors. These modular expansion boards offer **supplemental I/O functions** (6) as well as peripheral support devices for specific functions offered by the controller populating the **SBC module** (9) mounted on the Development Board.
- All controller and on-board signals provided by the SBC module mounted on the Development Board are broken out 1:1 to the expansion board by means of its **patch field** (7). The required connections between SBC module / Development Board and the expansion board are made using **patch cables** (8) included with the expansion board.

The following figure illustrates the modular development platform concept:

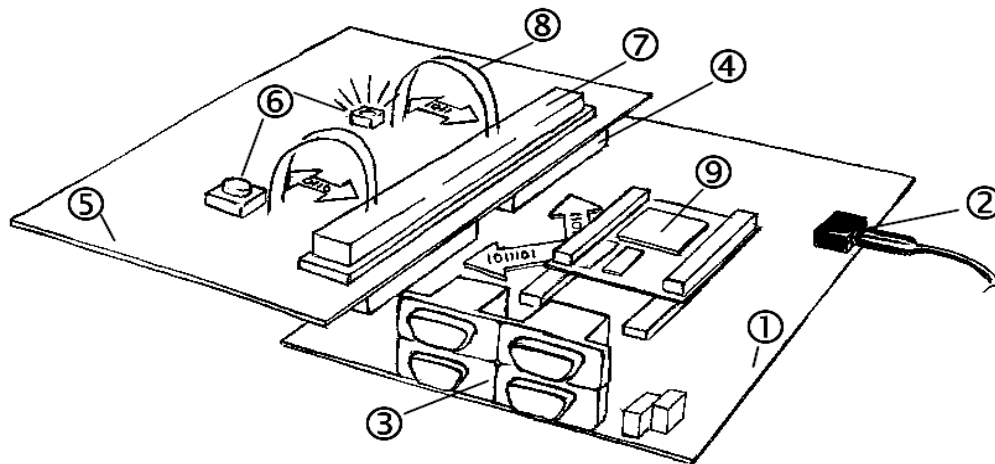


Figure 13: Modular Development and Expansion Board Concept with the phyCORE-T89C51CC01

The following sections contain specific information relevant to the operation of the phyCORE-T89C51CC01 mounted on the phyCORE Development Board LD 5V. For a general description of the Development Board, please refer to the corresponding Development Board Hardware Manual.

13.2 Development Board LD 5V Connectors and Jumpers

13.2.1 Connectors

As shown in *Figure 14*, the following connectors are available on the phyCORE Development Board LD 5V:

- X1- low-voltage socket for power supply connectivity
- X2- mating receptacle for expansion board connectivity
- P1- dual DB-9 sockets for serial RS-232 interface connectivity
- P2- dual DB-9 connectors for CAN or RS-485 interface connectivity
- X4- voltage supply for external devices and subassemblies
- X5- GND connector (for connection of GND signal of measuring devices such as an oscilloscope)
- X6- phyCORE-connector enabling mounting of applicable phyCORE modules
- BAT1- receptacle for an optional battery

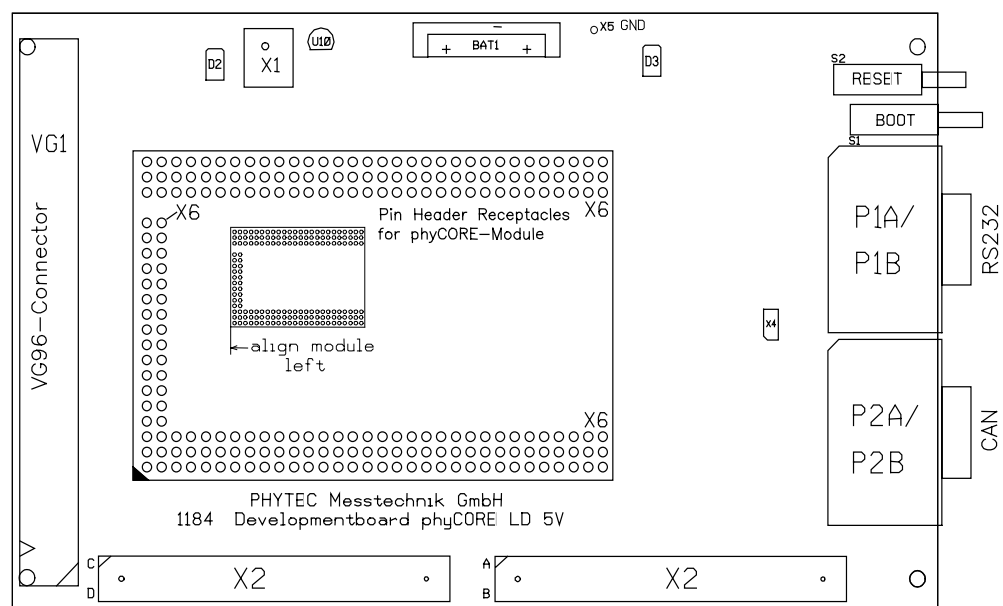


Figure 14: Location of Connectors on the phyCORE Development Board LD 5V

Please note that all module connections are not to exceed their expressed maximum voltage or current. Maximum signal input values are indicated in the corresponding controller User's Manual/Data Sheets. As damage from improper connections varies according to use and application, it is the user's responsibility to take appropriate safety measures to ensure that the module connections are protected from overloading through connected peripherals.

13.2.2 Jumpers on the phyCORE Development Board LD 5V

Peripheral components of the phyCORE Development Board LD 5V can be connected to the signals of the phyCORE-T89C51CC01 by setting the applicable jumpers.

The Development Board's peripheral components are configured for use with the phyCORE-T89C51CC01 by means of insertable jumpers. If no jumpers are set, no signals connect to the DB-9 connectors, the control and display units and the CAN transceivers. The Reset input on the phyCORE-T89C51CC01 directly connects to the Reset button (S2). *Figure 15* illustrates the numbering of the jumper pads, while *Figure 16* indicates the location of the jumpers on the Development Board.

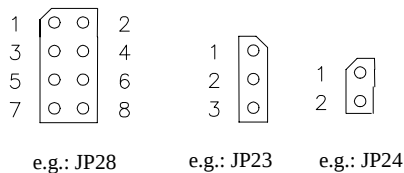


Figure 15: Numbering of Jumper Pads

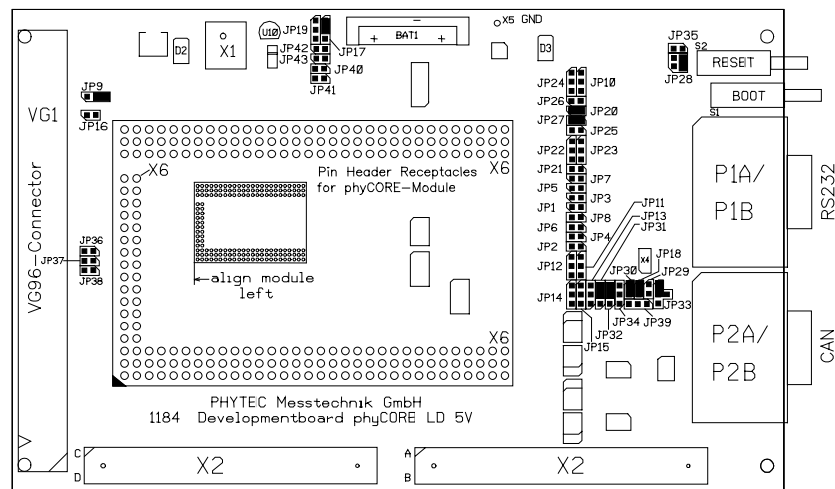


Figure 16: Location of the Jumpers (View of the Component Side)

Figure 17 shows the factory default jumper settings for operation of the phyCORE Development Board LD 5V with the standard phyCORE-T89C51CC01 (standard = T89C51CC01 controller, use of the RS-232 interface, the optional RS-485 interface, the CAN interface, LED D3, the Boot button on the Development Board). Jumper settings for other functional configurations of the phyCORE-T89C51CC01 module mounted on the Development Board are described in section 13.3.

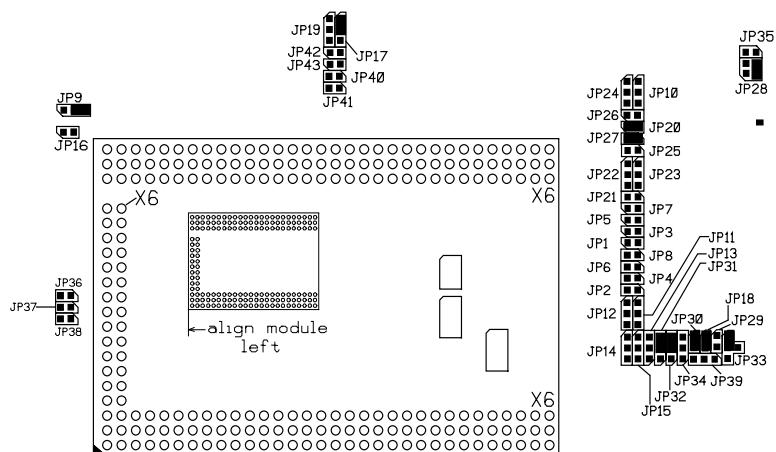


Figure 17: Default Jumper Settings of the phyCORE Development Board LD 5V with phyCORE-T89C51CC01

13.2.3 Unsupported Features and Improper Jumper Settings

The following table contains improper jumper settings for operation of the phyCORE-T89C51CC01 on a phyCORE Development Board LD 5V. Functions configured by these settings are not supported by the phyCORE module.

Supply Voltage:

The phyCORE Development Board LD 5V supports two main supply voltages for the start-up of various phyCORE modules. When using the phyCORE-T89C51CC01, only one main supply voltage is required, VCC1 with 5 V. The connector pins for a second supply voltage on the phyCORE-T89C51CC01 are not defined.

Sockets G and H on the phyCORE Development Board LD 5V support connection of supply voltages for analog components. The phyCORE-T89C51CC01 is not populated with these sockets, and therefore Jumpers J36 to J38 must remain open.

Jumper	Setting	Description
JP16	closed	VCC2 routed to phyCORE-T89C51CC01
JP36	closed	AVDD routed to phyCORE-T89C51CC01
JP37	closed	REF+ routed to phyCORE-T89C51CC01
JP38	closed	REF- routed to phyCORE-T89C51CC01

Table 18: *Improper Jumper Settings for the Development Board*

13.3 Functional Components on the phyCORE Development Board LD 5V

This section describes the functional components of the phyCORE Development Board LD 5V supported by the phyCORE-T89C51CC01 and appropriate jumper settings to activate these components. Depending on the specific configuration of the phyCORE-T89C51CC01 module, alternative jumper settings can be used. These jumper settings are different from the factory default settings as shown in *Figure 17* and enable alternative or additional functions on the phyCORE Development Board LD 5V depending on user needs.

13.3.1 Power Supply at X1

Caution:

Do not use a laboratory adapter to supply power to the Development Board! Power spikes during power-on could destroy the phyCORE module mounted on the Development Board! Do not change modules or jumper settings while the Development Board is supplied with power!

Permissible input voltage: +/-5 VDC regulated.

The required current load capacity of the power supply depends on the specific configuration of the phyCORE-T89C51CC01 mounted on the Development Board as well as whether an optional expansion board is connected to the Development Board. An adapter with a minimum supply of 500 mA is recommended.

Jumper	Setting	Description
JP9	2 + 3	5 V main supply voltage to the phyCORE-T89C51CC01

Table 19: JP9 Configuration of the Main Supply Voltage VCCI

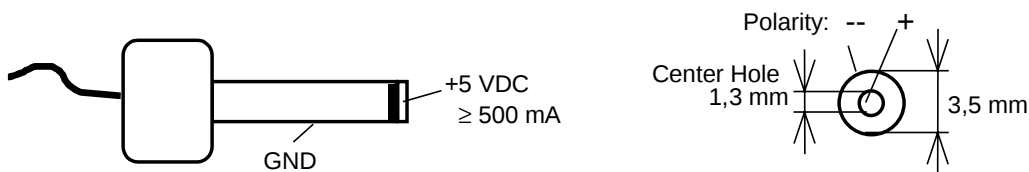


Figure 18: Connecting the Supply Voltage at X1

Caution:

When using this function, the following jumper settings are not allowed:

Jumper	Setting	Description
JP9	1 + 2	3.3 V as main supply voltage for the phyCORE-T89C51CC01
	open	phyCORE-T89C51CC01 not connected to main supply voltage

Table 20: JP9 Improper Jumper Settings for the Main Supply Voltage

Setting Jumper JP9 to positions 1+2 configures a main power supply to the phyCORE-T89C51CC01 of 3.3 V which could destroy the module. If Jumper JP9 is open, no main power supply is connected to the phyCORE-T89C51CC01. This jumper setting should therefore not be used.

13.3.2 Starting FlashTools

The Flash memory of the phyCORE-T89C51CC01 contains the FlashTools firmware. The combination of this firmware and the corresponding software installed on the PC allow for on-board Flash programming with application programs via an RS-232 interface.

Caution:

Starting FlashTools requires Jumper J1 on the phyCORE-T89C51CC01 closed at positions **1+2**! Refer to section 3.1 for details.

In order to start the FlashTools on the phyCORE-T89C51CC01, the Boot pin (X1D6) of the phyCORE module must be connected to a high-level signal at the time the Reset signal changes from its active to the inactive state.

The phyCORE Development Board LD 5V provides three different options to enable the Flash programming mode:

1. The Boot button (S1) can be connected to VCC via Jumper JP28 which is located next the the Boot and Reset buttons at S1 and S2. This configuration enables start-up of the FlashTools firmware if the Boot button is pressed during a hardware reset or power-on.

Jumper	Setting	Description
JP28	3 + 4	Boot button (in conjunction with Reset button or connection of the power supply) starts the FlashTools firmware on the phyCORE-T89C51CC01

Table 21: JP28 Configuration of the Boot Button

2. The Boot input of the phyCORE-T89C51CC01 can also be permanently connected to VCC. This spares pushing the Boot button during a hardware reset or power-on.

Jumper	Setting	Description
JP28	2 + 4	Boot input connected permanently with VCC. FlashTools are always started with Reset button or with connection of the power supply

Table 22: JP28 Configuration of a Permanent FlashTools Start Condition

Caution:

In this configuration a regular reset, hence normal start of your application, is not possible. The FlashTools firmware is started every time. This is useful when using an emulator.

3. It is also possible to start the FlashTools via external signals applied to the DB-9 socket P1A. This requires control of the signal transition on the Reset line (/RESIN) via pin 7 while a static high-level is applied to pin 4 for the Boot signal.

Jumper	Setting	Description
JP22	1 + 2	Pin 7 (CTS) of the DB-9 socket P1A as Reset signal for the phyCORE-T89C51CC01
JP23	1 + 2	Pin 4 (DSR) of the DB-9 socket P1A as Boot signal for the phyCORE-T89C51CC01
JP10	2 + 3	High-level Boot signal connected with the Boot input of the phyCORE-T89C51CC01

Table 23: JP22, JP23, JP10 Configuration of Boot via RS-232

Caution:

When using this function, the following jumper setting is not allowed:

Jumper	Setting	Description
JP10	1 + 2	Jumper setting generates low-level on Boot input of the phyCORE-T89C51CC01

Table 24: Improper Jumper Settings for Boot via RS-232

13.3.3 First Serial Interface at Socket P1A

Socket P1A is the lower socket of the double DB-9 connector at P1. P1A is connected via jumpers to the first serial interface of the phyCORE-T89C51CC01. When connected to a host-PC, the phyCORE-T89C51CC01 can be rendered in FlashTools mode via signals applied to the socket P1A (*refer to section 13.3.2*).

Jumper	Setting	Description
JP20	closed ¹	Pin 2 of DB-9 socket P1A connected with RS-232 interface signal TxD0 of the phyCORE-T89C51CC01
	open	Pin 2 of DB-9 socket P1A not connected
JP21	open	Pin 9 of DB-9 socket P1A not connected
JP22	open	Pin 7 of DB-9 socket P1A not connected
	1 + 2	Reset input of the module can be controlled via RTS signal from a host-PC
JP23	open	Pin 4 of DB-9 socket P1A not connected
	1 + 2	Boot input of the module can be controlled via DTR signal from a host-PC
JP24	open	Pin 6 of DB-9 socket P1A not connected
JP25	open	Pin 8 of DB-9 socket P1A not connected
JP26	open	Pin 1 of DB-9 socket P1A not connected
JP27	closed ¹	Pin 3 of DB-9 socket P1A connected with RS-232 interface signal RxD0 from the phyCORE-T89C51CC01
	open	Pin 3 of DB-9 socket P1A not connected

¹ = required for communication with FlashTools

Table 25: Jumper Configuration for the RS-232 Interface

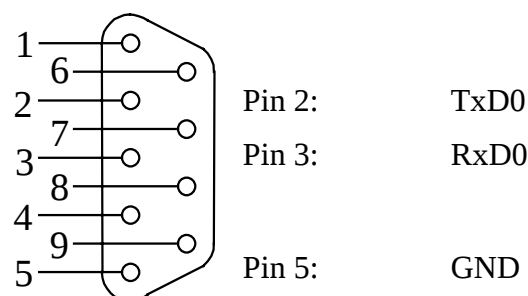


Figure 19: Pin Assignment of the DB-9 Socket P1A as RS-232 (Front View)

13.3.4 Socket P1B

Socket P1B is the upper socket of the double DB-9 connector at P1. The phyCORE-T89C51CC01 does not support a second RS-232 interface. Socket P1B remains unused.

Jumper	Setting	Description
JP1	open	Pin 2 of the DB-9 socket P1B not connected
JP2	open	Pin 9 of the DB-9 socket P1B not connected
JP3	open	Pin 7 of the DB-9 socket P1B not connected
JP4	open	Pin 4 of the DB-9 socket P1B not connected
JP5	open	Pin 6 of the DB-9 socket P1B not connected
JP6	open	Pin 8 of the DB-9 socket P1B not connected
JP7	open	Pin 1 of the DB-9 socket P1B not connected
JP8	open	Pin 3 of the DB-9 socket P1B not connected
JP40	open	Pin 2 of the DB-9 socket P1B not connected
JP41	open	Pin 3 of the DB-9 socket P1B not connected

Table 26: Jumper Configuration of the DB-9 Socket P1B




Figure 20: Pin Assignment of the DB-9 Socket P1B (Front View)

Caution:

When using the phyCORE-T89C51CC01 mounted on a phyCORE Development Board LD 5V the following jumper settings are not functional and could damage the module:

Jumper	Setting	Description
JP1	closed	Pin 2 of the DB-9 socket P1B is connected to B (RS-485) of the phyCORE-T89C51CC01
JP8	closed	Pin 3 of the DB-9 socket P1B is connected to A (RS-485) of the phyCORE-T89C51CC01
JP40	closed	Pin 2 of the DB-9 socket P1B is connected to pin VAGND of the phyCORE-T89C51CC01
JP41	closed	Pin 3 of the DB-9 socket P1B is connected to pin VAREF of the phyCORE-T89C51CC01

Table 27: Improper Jumper Settings for Configuration of P1B

If an RS-232 cable is connected to P1B by mistake the voltage level on the RS-232 lines could destroy the phyCORE-T89C51CC01.

13.3.5 CAN Interface at Plug P2A

Plug P2A is the lower plug of the double DB-9 connector at P2. P2A is connected to the CAN interface (CAN0) of the phyCORE-T89C51CC01 via jumpers. Depending on the configuration of the CAN transceivers and their power supply, the following three configurations are possible:

1. CAN transceiver populating the phyCORE-T89C51CC01 is enabled and the CAN signals from the module extend directly to plug P2A.

Jumper	Setting	Description
JP31	2 + 3	Pin 2 of the DB-9 plug P2A is connected to CAN-L0 from on-board transceiver on the phyCORE module
JP32	2 + 3	Pin 7 of the DB-9 plug P2A is connected to CAN-H0 from on-board transceiver on the phyCORE module
JP11	open	Input at opto-coupler U4 on the phyCORE Development Board LD 5V open
JP12	open	Output at opto-coupler U5 on the phyCORE Development Board LD 5V open
JP13	open	No supply voltage to CAN transceiver and opto-coupler on the phyCORE Development Board LD 5V
JP18	open	No GND potential at CAN transceiver and opto-coupler on the phyCORE Development Board LD 5V
JP29	open	No power supply via CAN bus
JP42	open	Input at opto-coupler U4 on the phyCORE Development Board LD 5V open
JP43	open	Output at opto-coupler U5 on the phyCORE Development Board LD 5V open

Table 28: Jumper Configuration for CAN Plug P2A using the CAN Transceiver on the phyCORE-T89C51CC01

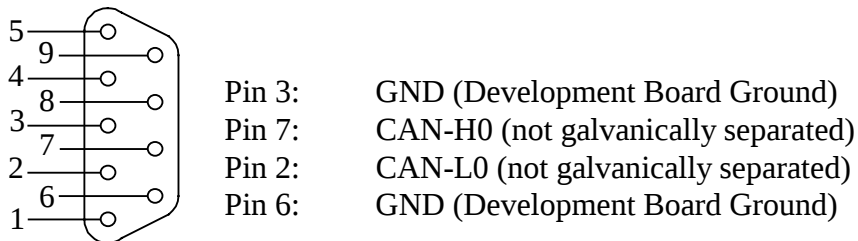


Figure 21: Pin Assignment of the DB-9 Plug P2A (CAN Transceiver on phyCORE-T89C51CC0, Front View)

Caution:

When using the DB-9 plug P2A as CAN interface and the CAN transceiver on the phyCORE-T89C51CC01 the following jumper settings are not functional and could damage the module:

Jumper	Setting	Description
JP31	1 + 2	Pin 2 of DB-9 plug P2A connected with CAN-L0 from CAN transceiver on the Development Board
JP32	1 + 2	Pin 7 of DB-9 plug P2A connected with CAN-H0 from CAN transceiver on the Development Board
JP11	1 + 2	Input at opto-coupler U4 on the Development Board connected with CAN-L0 from phyCORE-T89C51CC01
JP11	2 + 3	TxDC from T89C51CC01 is connected to CAN transceiver U2 via opto-coupler U4
JP12	1 + 2	Output at opto-coupler U5 on the Development Board connected with CAN-H0 on phyCORE-T89C51CC01
JP12	2 + 3	RxDC from T89C51CC01 is connected to CAN transceiver U2 via opto-coupler U5
JP13	1 + 2	Supply voltage for CAN transceivers and opto-couplers derived from external source (CAN bus) via on-board voltage regulator
JP13	2 + 3	Supply voltage for CAN transceivers and opto-couplers derived from local supply circuitry on the Development Board
JP18	closed	CAN transceiver and opto-coupler on the Development Board connected with local GND potential
JP29	closed	Supply voltage for on-board voltage regulator from pin 9 of DB-9 plug P2A
JP42	closed	Input on opto-coupler U4 on the Development Board is connected with P1.1 of the phyCORE-T89C51CC01
JP43	closed	Output at opto-coupler U5 on the Development Board connected with P1.0 of the phyCORE-T89C51CC01

Table 29: Improper Jumper Settings for the CAN Plug P2A (CAN Transceiver on phyCORE-T89C51CC01)

2. The CAN transceiver populating the phyCORE-T89C51CC01 is disabled; CAN signals generated by the CAN transceiver (U2) on the Development Board extending to connector P2A **without galvanic separation**:

Jumper	Setting	Description
JP31	1 + 2	Pin 2 of DB-9 plug P2A connected with CAN-L0 from CAN transceiver U2 on the Development Board
JP32	1 + 2	Pin 7 of DB-9 plug P2A connected with CAN-H0 from CAN transceiver U2 on the Development Board
JP11	2 + 3	Input at opto-coupler U4 on the Development Board connected to TxDC (P4.0) of the phyCORE-T89C51CC01
JP12	2 + 3	Output at opto-coupler U5 on the Development Board connected to RxDC (P4.1) of the phyCORE-T89C51CC01
JP13	2 + 3	Supply voltage for CAN transceiver and opto-coupler derived from local supply circuitry on the phyCORE Development Board LD 5V
JP18	closed	CAN transceiver and opto-coupler on the Development Board connected with local GND potential
JP29	open	No power supply via CAN bus
JP42	open	Input at opto-coupler U4 on the Development Board not connected to P1.1 of the phyCORE-T89C51CC01
JP43	open	Output at opto-coupler U5 on the Development Board not connected to P1.0 of the phyCORE-T89C51CC01

Table 30: Jumper Configuration for CAN Plug P2A using the CAN Transceiver on the Development Board

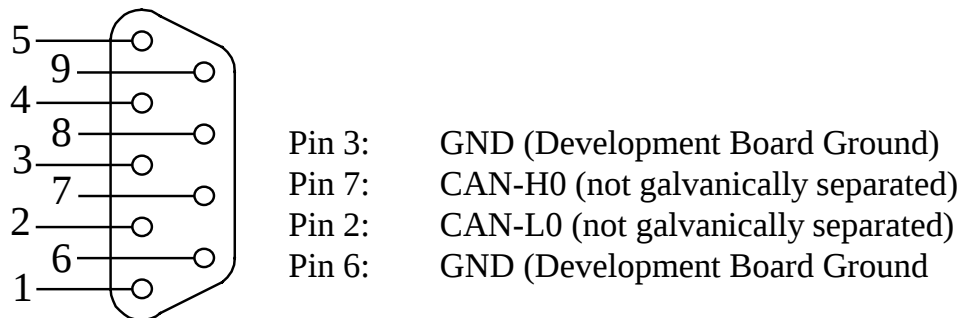


Figure 22: Pin Assignment of the DB-9 Plug P2A (CAN Transceiver on Development Board)

Caution:

When using the DB-9 connector P2A as CAN interface and the CAN transceiver on the Development Board the following jumper settings are not functional and could damage the module:

Jumper	Setting	Description
JP31	2 + 3	Pin 2 of DB-9 plug P2A connected with CAN-L0 from on-board transceiver on the phyCORE-T89C51CC01
JP32	2 + 3	Pin 7 of DB-9 plug P2A connected with CAN-H0 from on-board transceiver on the phyCORE-T89C51CC01
JP11	1 + 2	Input at opto-coupler U4 on the Development Board connected with CAN-L0 from phyCORE-T89C51CC01
JP12	1 + 2	Output at opto-coupler U5 on the Development Board connected with CAN-H0 on phyCORE-T89C51CC01
JP13	1 + 2	Supply voltage for CAN transceiver and opto-coupler on the Development Board derived from external source (CAN bus) via on-board voltage regulator
JP29	closed	Supply voltage for on-board voltage regulator from pin 9 of DB-9 connector P2A
JP42	closed	Input at opto-couler U4 on the Development Board connected to P1.1 of the phyCORE-T89C51CC01
JP43	closed	Output at opto-coupler U5 on the Development Board connected to P1.0 of the phyCORE-T89C51CC01

Table 31: Improper Jumper Settings for the CAN Plug P2A (CAN Transceiver on the Development Board)

3. The CAN transceiver populating the phyCORE-T89C51CC01 is disabled; CAN signals generated by the CAN transceiver (U2) on the Development Board extend to connector P2A **with galvanic separation**. This configuration requires connection of an external CAN supply voltage of 7 to 13 V, 14 to 20 V or 21 to 27 V. The external power supply must be **only** connected to either P2A **or** P2B.

Jumper	Setting	Description
JP31	1 + 2	Pin 2 of DB-9 plug P2A connected with CAN-L0 from CAN transceiver U2 on the Development Board
JP32	1 + 2	Pin 7 of DB-9 plug P2A connected with CAN-H0 from CAN transceiver U2 on the Development Board
JP11	2 + 3	Input at opto-coupler U4 on the Development Board connected to TxDC (P4.0) of the phyCORE-T89C51CC01
JP12	2 + 3	Output at opto-coupler U5 on the Development Board connected to RxDC (P4.1) of the phyCORE-T89C51CC01
JP13	1 + 2	Supply voltage for CAN transceiver and opto-coupler on the Development Board derived from external source (CAN bus) via on-board voltage regulator
JP18	open	CAN transceiver and opto-coupler on the Development Board disconnected from local GND potential
JP29	closed	Supply voltage for on-board voltage regulator from pin 9 of DB-9 plug P2A
JP39	1 + 2	external CAN supply of 7 to 13 V
	2 + 3	external CAN supply of 14 to 20 V
	open	external CAN supply of 21 to 27 V
JP42	open	Input at opto-coupler U4 on the Development Board not connected to P1.1 of the phyCORE-T89C51CC01
JP43	open	Output at opto-coupler U5 on the Development Board not connected to P1.0 of the phyCORE-T89C51CC01

Table 32: Jumper Configuration for CAN Plug P2A using the CAN Transceiver on the Development Board with Galvanic Separation

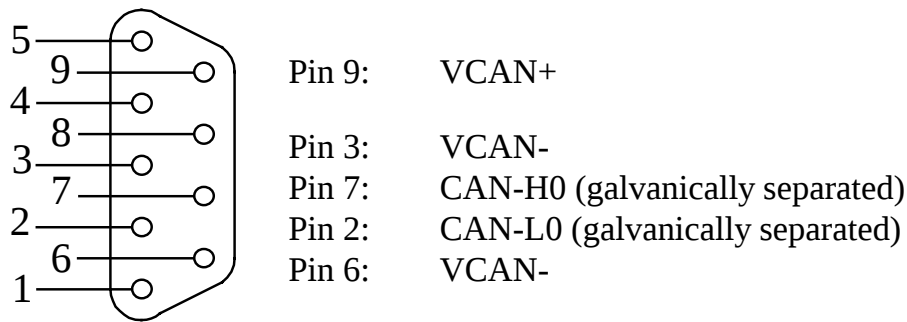


Figure 23: Pin Assignment of the DB-9 Plug P2A (CAN Transceiver on Development Board with Galvanic Separation)

Caution:

When using the DB-9 plug P2A as CAN interface and the CAN transceiver on the Development Board with galvanic separation the following jumper settings are not functional and could damage the module:

Jumper	Setting	Description
JP31	2 + 3	Pin 2 of DB-9 plug P2A connected with CAN-L0 from on-board transceiver on the phyCORE-T89C51CC01
JP32	2 + 3	Pin 7 of DB-9 plug P2A connected with CAN-H0 from on-board transceiver on the phyCORE-T89C51CC01
JP11	1 + 2	Input at opto-coupler U4 on the Development Board connected with CAN-L0 from phyCORE-T89C51CC01
JP12	1 + 2	Output at opto-coupler U5 on the Development Board connected with CAN-H0 on phyCORE-T89C51CC01
JP13	2 + 3	Supply voltage for CAN transceiver and opto-coupler derived from local supply circuitry on the phyCORE Development Board LD 5V
JP18	closed	CAN transceiver and opto-coupler on the Development Board connected with local GND potential
JP42	closed	Input at opto-couler U4 on the Development Board connected to P1.1 of the phyCORE-T89C51CC01
JP43	closed	Output at opto-coupler U5 on the Development Board connected to P1.0 of the phyCORE-T89C51CC01

Table 33: Improper Jumper Settings for the CAN Plug P2A (CAN Transceiver on Development Board with Galvanic Separation)

13.3.6 RS-485 Interface at Plug P2B

Connector P2B is the upper connector of the double DB-9 connector at P2. P2B is connected to the RS-485 interface signals of the phyCORE-T89C51CC01 via jumpers. The RS-485 interface is an alternative function of the serial interface signals on the T89C51CC01 controller. The default configuration of the phyCORE-T89C51CC01 activates the RS-232 interface. In order to enable the RS-485 signals, different jumper settings on the phyCORE-T89C51CC01 are required (*refer to sections 3.3, 3.6 and 3.10 for details*).

Jumper	Setting	Description
JP33	1 + 2	Pin 2 of DB-9 connector P2B connected with RS-485 A signal on the phyCORE-T89C51CC01
JP34	open	Pin 7 of DB-9 connector P2B disconnected from signals on the Development Board
JP14	open	CAN opto-coupler U6 on the Development Board disconnected from module pins
JP15	open	CAN opto-coupler U7 on the Development Board disconnected from module pins
JP13	open	CAN transceiver and opto-coupler on the Development Board disconnected from supply voltage
JP18	closed	Pin 3 and 6 of DB-9 connector P2B connected with local GND potential on the Development Board
JP29	open	Supply voltage via pin 9 of DB-9 connector P2A or P2B disabled
JP30	closed	Pin 8 of DB-9 connector P2B connected with RS-485 B signal on the phyCORE-T89C51CC01

Table 34: Jumper Configuration for DB-9 Plug P2B as RS-485 Interface

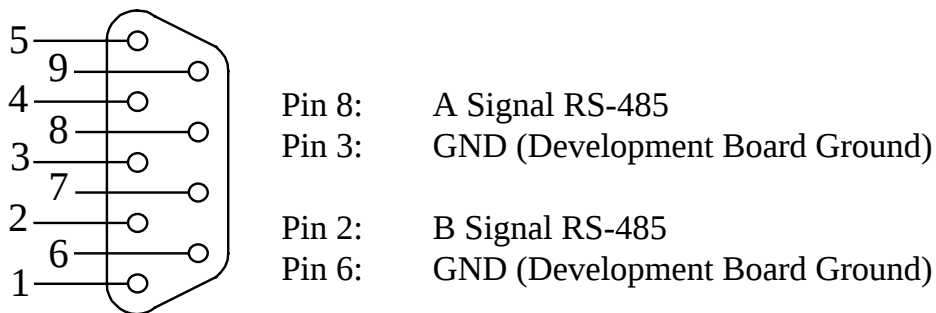


Figure 24: Pin Assignment of the DB-9 Plug P2B as RS-485 Interface

Caution:

When using the DB-9 plug P2B as RS-485 interface, the following jumper settings are not functional and could damage the module:

Jumper	Setting	Description
JP33	2 + 3	Pin 2 of DB-9 plug P2B connected with CAN-L1 signal from U3 on the Development Board
	2 + 4	Pin 2 of DB-9 plug P2B connected with P4.0 on the phyCORE-T89C51CC01
JP34	1 + 2	Pin 7 of DB-9 plug P2B connected with CAN-H1 signal from U3 on the Development Board
	2 + 3	Pin 7 of DB-9 plug P2B connected with P4.1 on the phyCORE-T89C51CC01
JP14	1 + 2	CAN opto-coupler U6 connected with CAN-L0 of the phyCORE-T89C51CC01
	2 + 3	CAN opto-coupler U6 connected with P4.0 on the phyCORE-T89C51CC01
JP15	1 + 2	CAN opto-coupler U7 connected with CAN-H0 on the phyCORE-T89C51CC01
	2 + 3	CAN opto-coupler U7 connected with P4.1 on the phyCORE-T89C51CC01
JP13	1 + 2	Supply voltage for CAN transceiver and opto-coupler on the Development Board derived from external source (CAN bus) via on-board voltage regulator
	2 + 3	Supply voltage for CAN transceiver and opto-coupler derived from local supply circuitry on the phyCORE Development Board LD 5V
JP18	open	Pin 3 and 6 of DB-9 connector P2B disconnected from local GND potential on the Development Board
JP29	closed	Supply voltage for on-board voltage regulator from pin 9 of DB-9 connector P2A or P2B

Table 35: Improper Jumper Settings for the RS-485 Interface at Plug P2B

13.3.7 Programmable LED D3

The phyCORE Development Board LD 5V offers a programmable LED at D3 for user implementations. This LED can be connected to a port pin at GPIO0 (JP17 = 1+2) or the data bus via a latch at U14 (JP17 = 2+3). When using the phyCORE-T89C51CC01, the factory default configuration enables control of LED D3 using port pin P1.0 (GPIO0).

Control and illumination of the LED can also be enabled via user code toggling data bit D0 at address FFDA0h. A low-level at latch U14 causes the LED to illuminate, LED D3 remains off when writing a high-level to latch U14.

Jumper	Setting	Description
JP17	1 + 2	Port pin P1.0 (GPIO0) of the T89C51CC01 controller controls LED D3 on the Development Board
JP17	2 + 3	Data bit D0 from the T89C51CC01 controller controls LED D3 via latch U14 on the Development Board

Table 36: JP17 Configuration of the Programmable LED D3

13.3.8 Pin Assignment Summary of the phyCORE, the Expansion Bus and the Patch Field.

As described in section 13.1, all signals from the phyCORE-T89C51CC01 extend in a strict 1:1 assignment to the Expansion Bus connector X2 on the Development Board. These signals, in turn, are routed in a similar manner to the patch field on an optional expansion board that mounts to the Development Board at X2.

Please note that, depending on the design and size of the expansion board, only a portion of the entire patch field is utilized under certain circumstances. When this is the case, certain signals described in the following section will not be available on the expansion board. However, the pin assignment scheme remains consistent.

A two dimensional numbering matrix similar to the one used for the pin layout of the phyCORE-connector is provided to identify signals on the Expansion Bus connector (X2 on the Development Board) as well as the patch field.

However, the numbering scheme for Expansion Bus connector and patch field matrices differs from that of the phyCORE-connector, as shown in the following two figures:

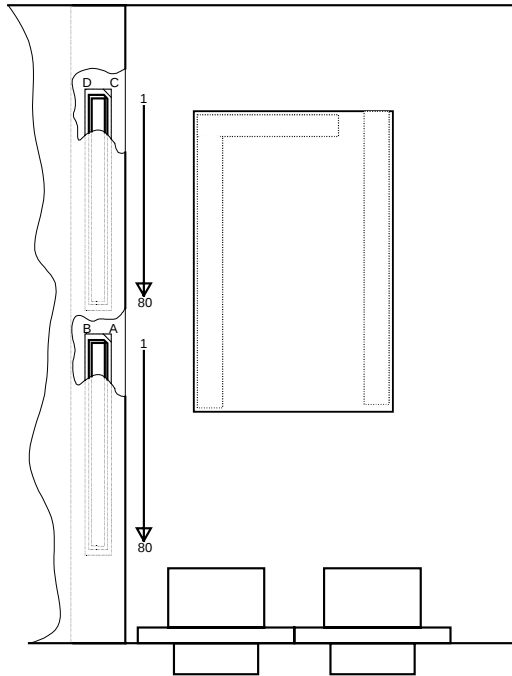


Figure 25: Pin Assignment Scheme of the Expansion Bus

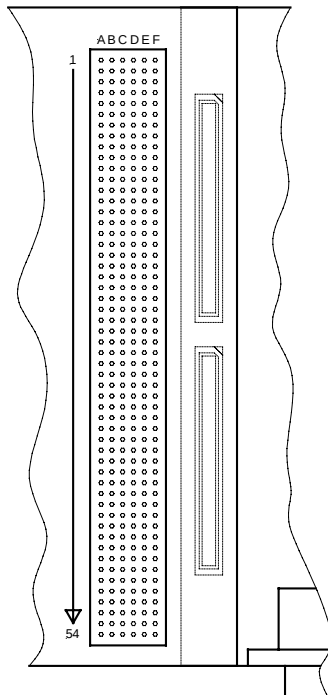


Figure 26: Pin Assignment Scheme of the Patch Field

The pin assignment on the phyCORE-T89C51CC01, in conjunction with the Expansion Bus (X2) on the Development Board and the patch field on an expansion board, is as follows:

Signal	phyCORE-T89C51CC01	Expansion Bus	Patch Field
P0.0/ AD0	12C	18B	33F
P0.1/ AD1	13A	19A	34A
P0.2/ AD2	13C	20A	34E
P0.3/ AD3	14A	20B	34B
P0.4/ AD4	14B	21A	34D
P0.5/ AD5	14C	21B	34F
P0.6/ AD6	15A	22B	35A
P0.7/ AD7	15C	23A	35E
A0	6A	8B	30B
A1	6B	9A	30D
A2	6C	10A	30F
A3	7A	10B	31A
A4	7C	11A	31E
A5	8A	11B	31B
A6	8C	12B	31F
A7	9A	13A	32A
P2.0/ A8	9B	13B	32C
P2.1/ A9	9C	14A	32E
P2.2/ A10	10A	15A	32B
P2.3/ A11	10C	15B	32F
P2.4/ A12	11A	16A	33A
P2.5/ A13	11B	16B	33C
P2.6/ A14	11C	17B	33E
P2.7/ A15	12A	18A	33B

Table 37: Pin Assignment Data/Address Bus for the phyCORE-T89C51CC01 / Development Board / Expansion Board

Signal	phyCORE-T89C51CC01	Expansion Bus	Patch Field
ClkIn	1A	1A	28A
ClkOut	1B	1B	28C
P3.2 / INT0	1C	2B	28E
P3.3 / INT1	2A	3A	28B
P3.4 / T0	2C	3B	28F
P3.5 / T1	3A	4A	29A
/CS1	3C	5A	29E
/CS2	4A	5B	29B
/CS3	4C	6B	29F
ALE	4B	6A	29D
/RD	5A	7B	30A
/WR	5C	8A	30E

Table 38: Pin Assignment Control Signals for the phyCORE-T89C51CC01 / Development Board / Expansion Board

Signal	phyCORE-T89C51CC01	Expansion Bus	Patch Field
/RESET	6E	10C	3D
/RESIN	6F	10D	3F
/WDI	4D	8D	3A
BOOT	6D	9C	3B
P1.0 / AN0 / T2	7D	11D	4A
P1.1 / AN1 / T2EX	8D	12D	4B
P1.2 / AN2 / ECI	8F	13C	4F
P1.3 / AN3 / CEX0	9D	13D	5A
P1.4 / AN4 / CEX1	9E	14C	5C
P1.5 / AN5 / CEX2	9F	15C	5E
P1.6 / AN6 / CEX3	10D	15D	5B
P1.7 / AN7 / CEX4	10F	16C	5F
P4.0 / CANTxDC	12D	18D	6B
P4.1 / CANRxDC	13D	20C	7A
CANL	14D	21C	7B
CANH	15D	23C	8A
P3.0 / RxDTTL	11D	16D	6A
P3.1 / TxDTTL	11E	17D	6C
RxD0	15F	23D	8E
TxD0	14F	22D	7F
A	14E	21D	7D
B	13F	20D	7E

Table 39: Pin Assignment Interface Signals for the phyCORE-T89C51CC01 / Development Board / Expansion Board

Signal	phyCORE-T89C51CC01	Expansion Bus	Patch Field
PFI	4F	7D	2F
PFO	5F	8C	3E
VCC	1D, 2D	1C, 2C, 1D, 2D	1A, 1C
VPD	4E	6D	2D
VBAT	4D	6C	2B
VAREF	11F	18C	6E
VAGND	12F	19C	6F
GND	2B, 3B, 5B, 7B, 8B, 10B, 12B, 13B, 15B, 1F; 2F, 3F, 5E, 7E, 8E, 12E, 13E, 15E	2A, 7A, 12A, 17A, 22A, 27A, 32A, 37A, 42A, 47A, 52A, 57A, 62A, 67A, 72A, 77A, 4B, 9B, 14B, 19B, 24B, 29B, 34B, 39B, 44B, 49B, 54B, 59B, 64B, 69B, 74B, 79B, 3C, 7C, 12C, 17C, 22C, 27C, 32C, 37C, 42C, 47C, 52C, 57C, 62C, 67C, 72C, 77C, 3D, 9D, 14D, 19D, 24D, 29D, 34D, 42D, 47D, 52D, 57D, 62D, 67D, 72D, 79D	3C, 4C, 7C, 8C, 9C, 12C, 13C, 14C, 17C, 18C, 19C, 22C, 23C, 24C, 27C, 29C, 30C, 31C, 34C, 35C, 36C, 39C, 40C, 41C, 44C, 45C, 46C, 49C, 50C, 51C, 54C, 4D, 5D, 6D, 9D, 10D, 11D, 14D, 15D, 16D, 9D, 20D, 21D, 24D, 25D, 26D, 28D, 31D, 32D, 33D, 36D, 37D, 38D, 41D, 42D, 43D, 46D, 47D, 48D, 51D, 52D, 53D, 1E, 2E, 1F

Table 40: *Pin Assignment Power Supply for the phyCORE-T89C51CC01 / Development Board / Expansion Board*

Signal	phyCORE-T89C51CC01	Expansion Bus	Patch Field
NC	2D, 3D, 2E, 3E, 7F,	4C, 5C, 11C, 4D, 5D,	2A, 1B, 2C, 1D, 4E,
Pins on the Development Board not being used by the phyCORE-T89C51CC01	16A to 32A 16B to 32B 16C to 32C 16D to 32C 16E to 32E 16F to 32F except GND pins in row B and E	24A to 80A 23B to 80B 24C to 80C 24D to 80D except GND pins in row A, B, C and D	9A to 27A 35A to 54A 8B to 27B 35B to 54B 8C to 27C 35C to 54C 8D to 27D 35D to 54D 9E to 27E 35E to 54E 9F to 27F 35F to 54F except GND pins in row C and D

Table 41: Unused Pins on the phyCORE-T89C51CC01 / Development Board / Expansion Board

13.3.9 Battery Connector BAT1

The mounting space BAT1 (see PCB stencil) is provided for connection of a battery that buffers volatile memory devices (SRAM) and the RTC on the phyCORE-T89C51CC01. The Voltage Supervisor Chip on the phyCORE-T89C51CC01 is responsible for switching from a normal power supply to a back-up battery. This optional battery required for this function (*refer to section 10*) is available through PHYTEC (order code BL-003).

13.3.10 DS2401 Silicon Serial Number

Communication to a DS2401 Silicon Serial Number can be implemented in various software applications for the definition of a node address or as copy protection in networked applications. The DS2401 can be soldered on space U10 or U9 on the Development Board, depending on the type of device packaging being used.

The Silicon Serial Number Chip mounted on the phyCORE Development Board LD 5V can be connected to a port pin at GPIO1 (JP19 = 1+2) or the data bus via latch U14 and driver U15 (JP19 = 2+3). When using the phyCORE-T89C51CC01, the factory default configuration enables access to the Silicon Serial Number using port pin P1.1 (GPIO1).

As an alternative, access to the DS2401 Silicon Serial Number can be enabled via user code by means of data bit D1 at address FDA0h (JP19 = 2+3).

Jumper	Setting	Description
JP19	1 + 2	Port pin P1.1 (GPIO1) of the T89C51CC01 is used to access the Silicon Serial Number
	2 + 3	Data bit D1 of the T89C51CC01 is used to access the Silicon Serial Number via latch U14 / driver U15

Table 42: JP19 JumperConfiguration for Silicon Serial Number Chip

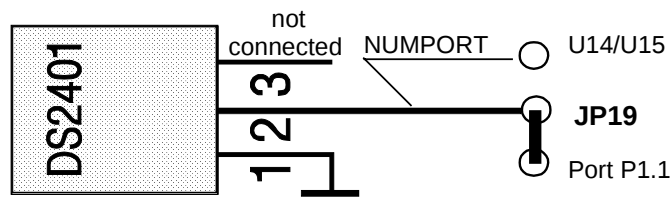


Figure 27: Connecting the DS2401 Silicon Serial Number

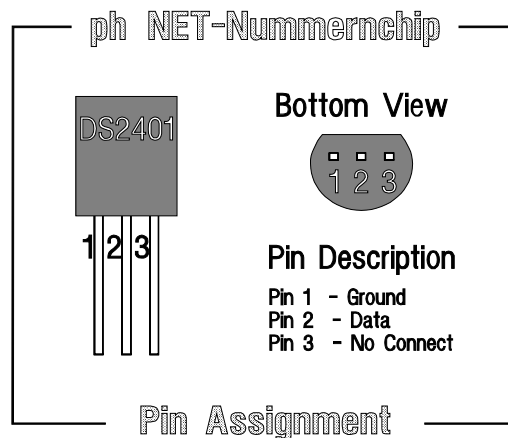


Figure 28: Pin Assignment of the DS2401 Silicon Serial Number

13.3.11 Pin Header Connector X4

The pin header X4 on the Development Board enables connection of an optional modem power supply. Connector X4 supplies 5 V = at pin 1 and provides the phyCORE Development Board LD 5V GND potential at pin 2. The maximum current draw depends on the power adapter used. We recommend the use of modems with less than 250 mA current draw.

Index

A

A/D Converter	18
A/D Reference Voltage	18
Address Decoder Registers	22
Address Decoding	21
Address Register	30

B

BAT1	76
Battery Buffer	43
Battery Connector	76
Block Diagram	6

C

CAN Bus	36
CAN Interface	19, 36, 62
CAN Transceiver	19, 36
CANH	19, 36
CANL	19, 36
Concept of the Development Board	49
Connector X4	78
Control Register 1	23
Control Register 2	27

D

Default Memory Model	21
Development Board Connectors and Jumpers	51
DS2401	77

E

EMC	1
EMI	36
Expansion Bus	71

F

FA[18..15]	26
Features	5
First Serial Interface	59
Flash Memory	37
Flash Memory, on-board	37
Flash Memory, on-chip	39
Functional Components on the phyCORE Development Board	55

H

Hints for Handling the Module	47
--	----

I

I ² C Bus	17
Introduction	3
IO-SW	27

J

J1	15
J10	18
J11	19
J12	19
J14	20
J2	15
J3	16
J4	16
J5	17
J6	17
J7	17
J8	18
J9	18
JP17	70
JP19	77

Jumper Configuration	52	RS-232 Transceiver.....	16, 35
Jumper Settings	14	RS-485 Interface	35, 68
L		RS-485 Interface Control	17
LED D3.....	70	RS-485 Transceiver.....	16, 35
M		RTC	43
Mask Register	31	RTC Interrupt Output.....	16
Memory Model	21	S	
P		Serial Interface	16
Patch Field	71	Silicon Serial Number	77
phyCORE-connector	7, 11	Socket P1A (First RS-232).....	59
Physical Dimensions	45	Socket P1B.....	60
Pin Assignment	71	SRAM	43
Pin Description.....	7	Starting FlashTools	57
Pinout	12	T	
Plug P2A	62	Technical Specifications	45
Plug P2B	68	U	
Power Consumption.....	46	U10.....	40
Power Supply	55	U11.....	42
PRG-EN	23	U2.....	41
R		U3.....	35
RA16	29	U4.....	35
Real-Time Clock.....	40	U5.....	36
Remote Download	15	U8.....	37
Remote Supervisory Chip	42	V	
Reset Button.....	52	VBAT.....	43
Reset Controller	41	VN-EN	25
RS-232 Interface	35		

Document: phyCORE-T89C51CC01

Document number: L-579e_1, August 2001

How would you improve this manual?

Did you find any mistakes in this manual?

page

Submitted by:

Customer number: _____

Name: _____

Company: _____

Address: _____

Return to:

PHYTEC Technologie Holding AG
Postfach 100403
D-55135 Mainz, Germany
Fax : +49 (6131) 9221-33

Published by

PHYTEC

© PHYTEC Meßtechnik GmbH 2001

Ordering No. L-579e_1
Printed in Germany