



NOTES:

- 1 REF. NDBC-3001 FOR CABLE SPECIFICATIONS AND NDBC-3002 FOR CABLE ASSEMBLY AND FABRICATION/WORKMANSHIP STANDARDS.
- 2 FOR POWER SYSTEM CABLES, NON-INSULATED TERMINAL LUGS ARE TO BE LIGHTLY CRIMPED IN PLACE, THEN SOLDERED TO ESTABLISH MAXIMUM ELECTRICAL CONDUCTIVITY.
- 3 EQUIVALENT SUBSTITUTE CAN BE USED IN PLACE OF SPECIFIED ITEM.

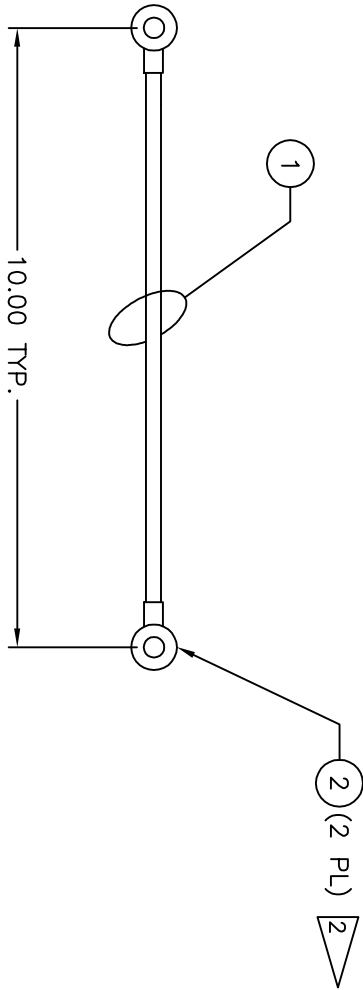

2.3 METER STANDARD BUOY GROUND WIRE ASSEMBLY -001

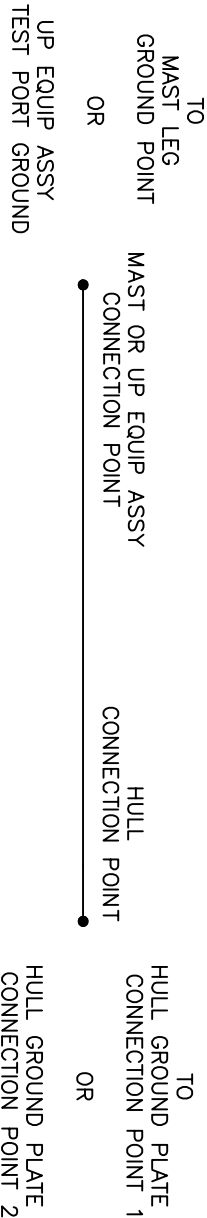

2.3 METER STANDARD BUOY GROUND WIRE WIRING -001

							5
							4
							3
							2
							1
							001
							QTY
							NOTES
							DESCRIPTION
							NDBC CONTROL NO.
							PART/SPEC. NUMBER
							ZONE
							ITEM NO.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES		CONTRACT NO.		 NATIONAL DATA BUOY CENTER John C Stennis Space Center Stennis Space Center, Mississippi 39529-6000	
DECIMALS	DO NOT SCALE DRAWING	APPROVALS			
XX, 2, 105	CONSTRUCTION MET. APPROVAL	DATE			
XX, 2, 105	WEAH/DART	DATE			
XX, 2, 105	DART	DATE			
-001	X	X	DRWN BY	2.3 METER STANDARD BUOY GROUND WIRE ASSEMBLY	
-001	X	X	CHECKED BY		
-001	X	X	ENGINEER APPROVAL		
-001	X	X	DATE		
-001	X	X	DATE		
-001	X	X	DATE	02.3F03119	
-001	X	X	DATE		
-001	X	X	DATE		
-001	X	X	DATE		
-001	X	X	DATE		
- NO.	HULL NO.	USED ON	APPROVED	DATE	REV
APPLICATION			ECP-P00-0000	SCALE 1/1	RELEASE DATE X
				SHEET 1 OF 1	-

REVISED: 10/01/09
DISCARD ALL PRIOR DWGS

AutoCAD Drawing/Sketch
Printed Copies May Be Obsolete:
Validate Prior to use.