


HPJ Series

Photoelectric Control with Self-contained Ultraminiature Amplifier


FEATURES

Provided with a Wide Range of Fingertip-size Slit Attachments (60cm at 3mm dia.)

- *Fingertip-size*
22×11×8mm (thru-scan type)
30×12×8mm (limited diffuse scan type)
- *Long distance scanning*
1.5m (thru-scan type)
30±5mm (limited diffuse scan type)
- *Various slit attachments (six types)*
- *Long-distance scanning with slit attached (60cm with 3mm dia. slit)*

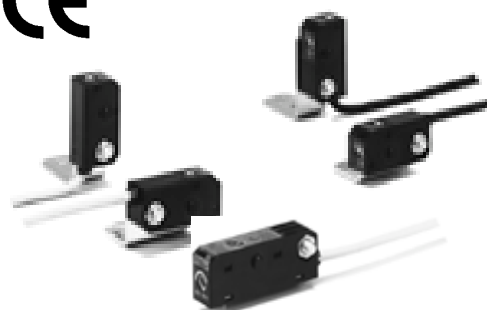

ORDER GUIDE

Shape	Scanning method		Scanning distance	Supply voltage	Output mode	Operation mode		Sensitivity adjustment	Catalog listing
						Light ON	Dark ON		
Horizontal type 	Thru-scan		1.5m	10.8 to 26.4V dc	NPN open collector	—	○	—	HPJ-T11
			0.5m			—	○	○	HPJ-T11G
Vertical type 			1.5m			—	○	—	HPJ-T21
			0.5m			—	○	○	HPJ-T21G
			1.5m		PNP open collector	—	○	—	HPJ-T22
					NPN open collector	○	—	—	HPJ-T23
	Limited diffuse scan	Red LED	3±0.5cm		NPN open collector	○	—	○	HPJ-D21
		Infrared LED			PNP open collector	○	—	○	HPJ-D22
					NPN open collector	○	—	○	HPJ-A21
					PNP open collector	○	—	○	HPJ-A22

SPECIFICATIONS

Scanning method	Thru-scan				Limited diffuse scan			
Catalog listing	HPJ-T□1	HPJ-T□1G	HPJ-T22	HPJ-T23	HPJ-D21	HPJ-D22	HPA-A21	HPA-A22
Supply voltage	10.8 to 26.4V dc (ripple 10% max.)							
Current consumption	Emitter 20mA max. Receiver 20mA max.	Emitter 10mA max. Receiver 20mA max.	Emitter 20mA max. Receiver 20mA max.	20mA max.				
Scanning distance	1.5m	0.5m	1.5m	30±5mm				
Detection object	Opaque object 6mm dia. max.	Opaque object 4mm dia. max.	Opaque object 6mm dia. max.	—				
Standard target object	—				10×10cm KODAK 90% white paper used	10×10cm KODAK 18% white paper used		
Scanning angle	2 to 20°	3 to 30°	2 to 20°	—				
Differential travel	—				25% max.			
Operation mode	Dark ON			Light ON	Light ON			
Output mode	NPN		PNP	NPN	NPN	PNP	NPN	PNP
Control output	Output switching circuit: 100mA max. (resistive load) Voltage drop: 1V max. (at 100mA switching circuit) Output dielectric strength: 26.4V	Output switching circuit: 80mA max. (resistive load) Voltage drop: 1V max. (at 80mA switching circuit) Output dielectric strength: 26.4V	Output switching circuit: 100mA max. (resistive load) Voltage drop: 1V max. (at 100mA switching circuit) Output dielectric strength: 26.4V	Output switching circuit: 80mA max. (resistive load) Voltage drop: 1V max. (at 80mA switching circuit) Output dielectric strength: 26.4V				
Response time	1ms max. for operation and recovery							
Sensitivity adjustment	—	1-turn control	—	1-turn control				
Light emitter	Infrared LED				Red LED		Infrared LED	
Indicator lamps	Operation indicator (other than thru scan emitter): red (lit at output ON)							
Ambient light immunity	Incandescent lamp: 3,000lx max., Sunlight: 10,000lx max.							
Operating temperature range	– 20 to +50°C							
Storage temperature range	– 40 to +70°C							
Humidity range	35 to 85%RH (condensation not allowed)							
Insulation resistance	20MΩ min. (by 500V dc megger)							
Dielectric strength	1,000V ac (50/60Hz) for 1 minute between case and electrically live metals	Non-controlled sections: 1,000V ac (50/60Hz) for 1 minute Controlled sections: 500V ac (50/60Hz) for 1 minute between case and electrically live metals	1,000V ac (50/60Hz) for 1 minute between case and electrically live metals		Non-controlled sections: 1,000V ac (50/60Hz) for 1 minute Controlled sections: 500V ac (50/60Hz) for 1 minute between case and electrically live metals			
Vibration resistance	10 to 55Hz, 1.5mm peak-to-peak amplitude, 2 hrs in X, Y and Z directions							
Shock resistance	500m/s² 3 times in X, Y and Z directions							
Protection	IP 40 (IEC standard)							
Wiring method	Pre-leaded							
Weight	Approx. 20g for both emitter and receiver (with 2m cable)	Approx. 25g for both emitter and receiver (with 2m cable)	Approx. 20g for both emitter and receiver (with 2m cable)		Approx. 20g (with 2m cable)			
Circuit protection	Reverse connection protection circuit							


ATTACHMENTS (sold separately)

Name	Shape	Description	Catalog listing	Applicable model
Slits for Thru-scan Type		Single set includes 1.5mm dia., 3mm dia., vertical 1mm width, vertical 2mm width, horizontal 1mm width, horizontal 2mm width (for emitter and receiver) slits	HPJ-U01	HPJ-T11, T11G, T21, T21G, T22, T23
Bracket for Thru-scan Type		Q'ty: 1 (supplied with HPJ-T11)	HPJ-B01	HPJ-T11, T11G, T21, T21G, T22, T23
Bracket for Thru-scan Type		Q'ty: 1 (supplied with HPJ-T21, T22, T23)	HPJ-B02	HPJ-T11, T11G, T21, T21G, T22, T23

CHARACTERISTICS DIAGRAMS


- Thru-scan HPJ-T11, T21, T22, T23

- Excess gain (excess light receiving level margin) (typical example)

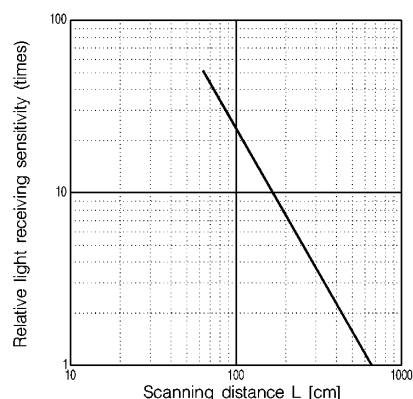


- Parallel motion characteristics (typical examples)


- Normal

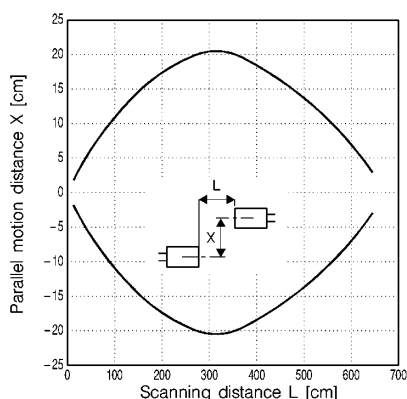


- 1.5mm dia. slit mounted at emitter

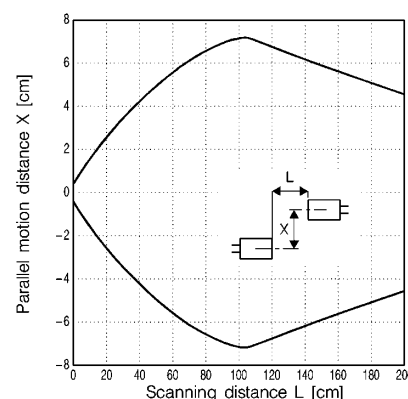


- 1.5mm dia. slit mounted at receiver

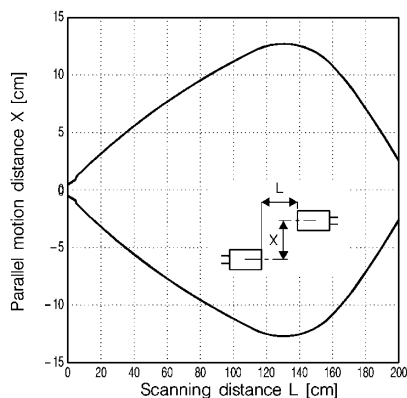


- 1.5mm dia. slit mounted at both emitter and receiver

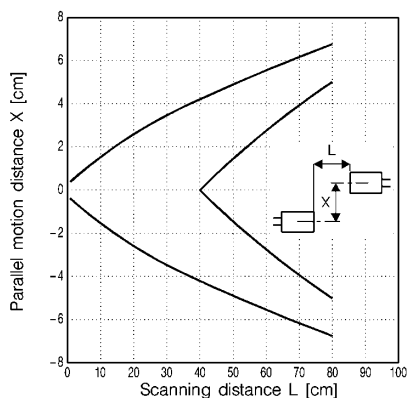


- 3mm dia. slit mounted at emitter

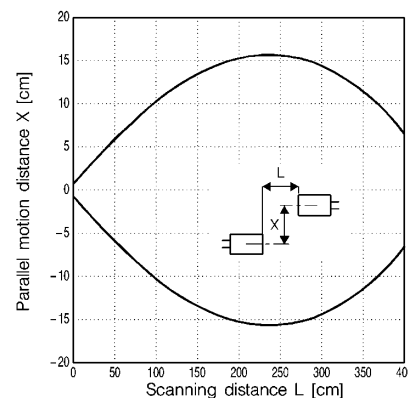


- 3mm dia. slit mounted at receiver

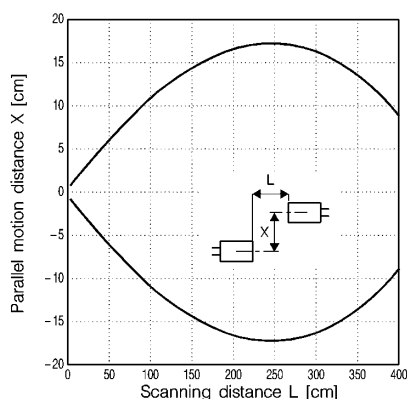


- 3mm dia. slit mounted at both emitter and receiver

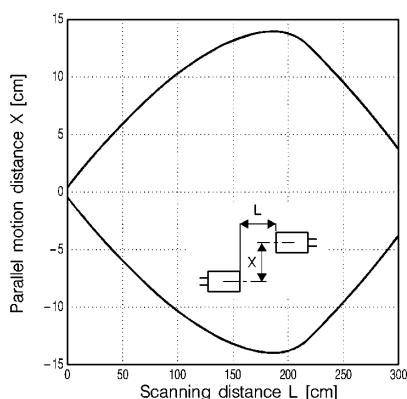


- 1mm wide vertical slit mounted at emitter

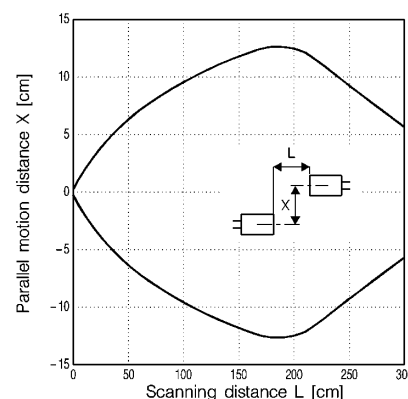


- 1mm wide vertical slit mounted at receiver

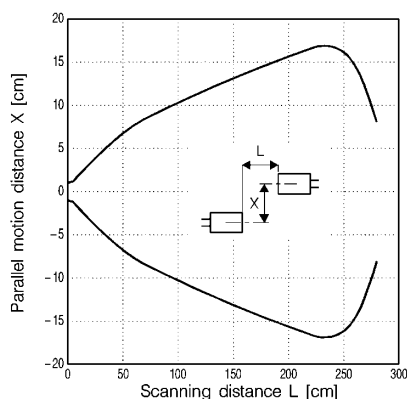


- 1mm wide vertical slit mounted at both emitter and receiver

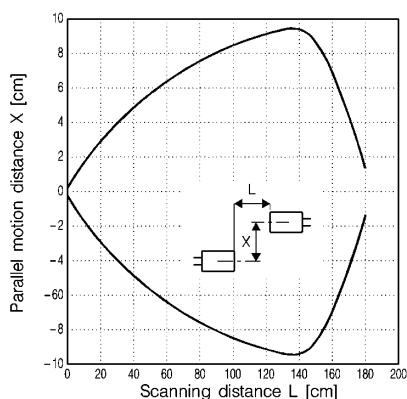


- 2mm wide vertical slit mounted at emitter

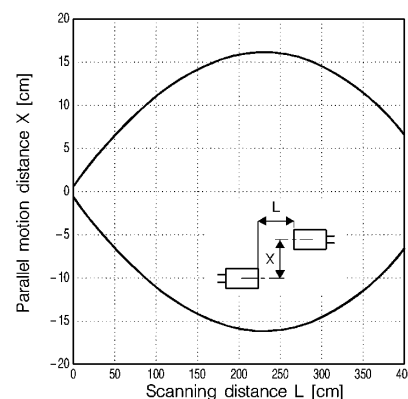


- 2mm wide vertical slit mounted at receiver

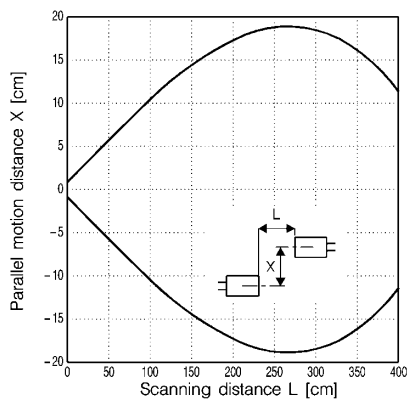


- 2mm wide vertical slit mounted at both emitter and receiver

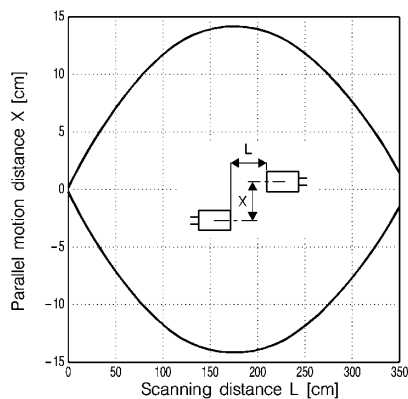


- 1mm wide horizontal slit mounted at emitter

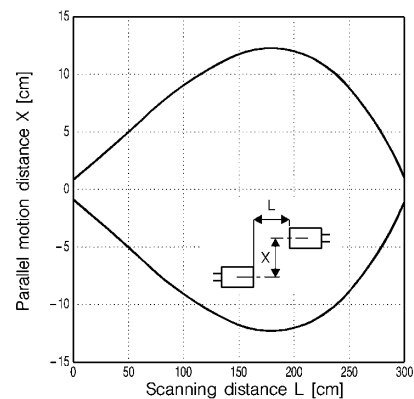


- 1mm wide horizontal slit mounted at receiver

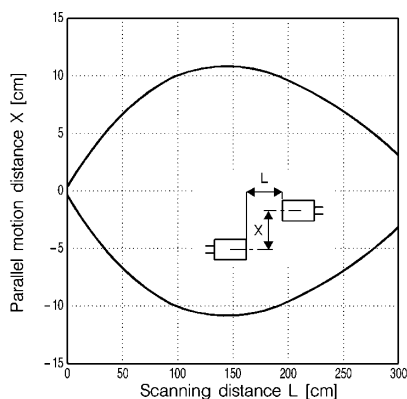


- 1mm wide horizontal slit mounted at both emitter and receiver

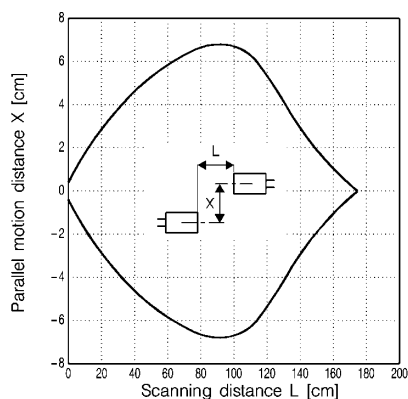


- 2mm wide horizontal slit mounted at emitter

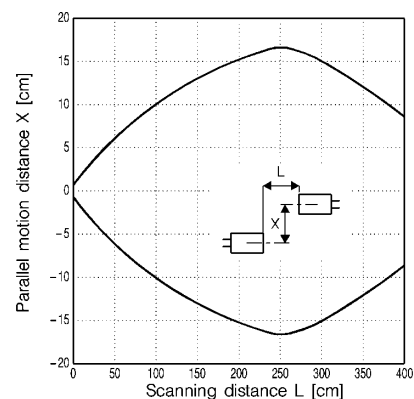


- 2mm wide horizontal slit mounted at receiver

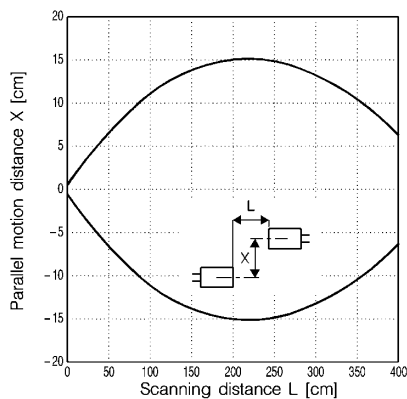

- 2mm wide horizontal slit mounted at both emitter and receiver

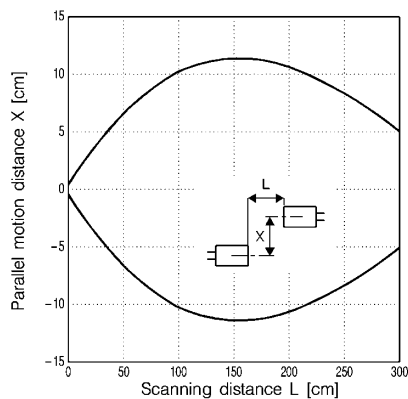

- Angular characteristics (typical example)

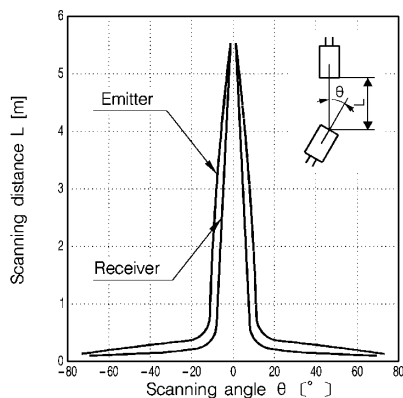


- Scanning distance characteristics (typical values) when slit **HPJ-U01** is attached (comparison with slit not attached)


	Used on emitter	Used on emitter or receiver
No slit	100%	100%
1.5mm dia.	5%	30%
3mm dia.	40%	60%
1mm wide horizontal	20%	40%
2mm wide horizontal	40%	60%
1mm wide vertical	20%	40%
2mm wide vertical	40%	60%

- Thru-scan **HPJ-T11G, T21G** (sensitivity adjustment)


- Excess gain (excess light receiving level margin) (typical example)

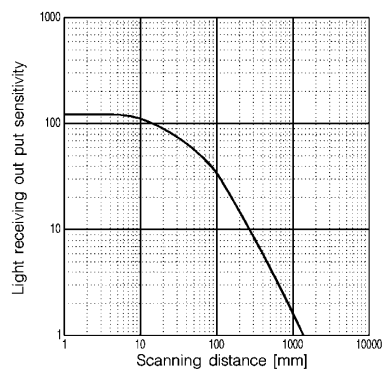

- Parallel motion characteristics (typical example)

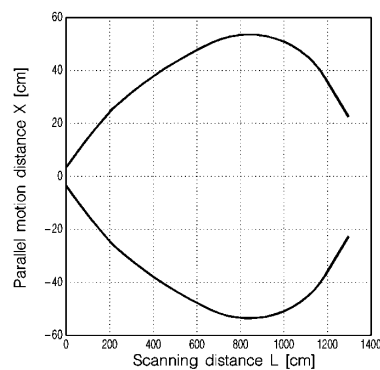


- Control position vs. sensing distance characteristics

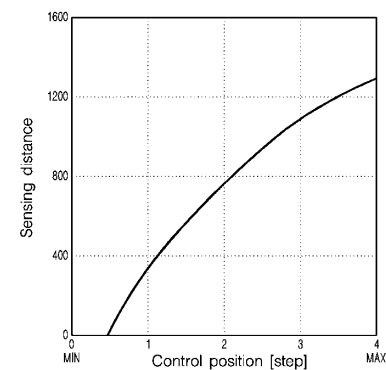


- Limited diffuse scan type **HPJ-D21**

- Excess gain (excess light receiving level margin) (typical example)

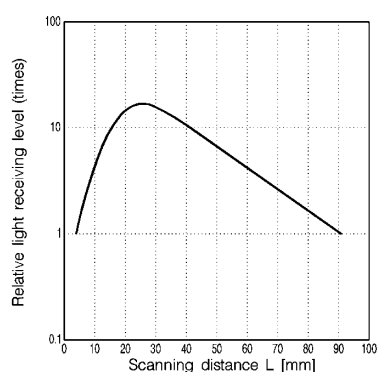


- Detection area characteristics


- Horizontal movement

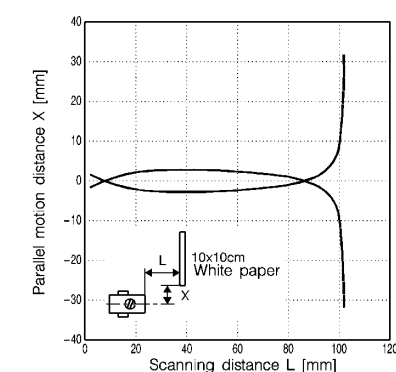

- Vertical movement

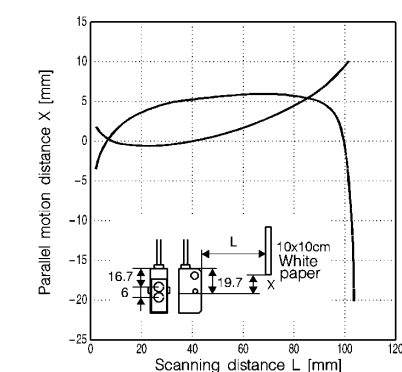


- Object characteristics

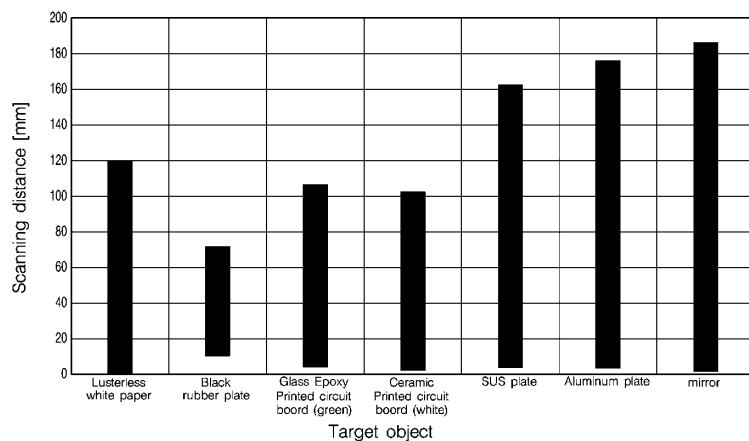


- Limited diffuse scan type **HPJ-A21**

- Excess gain (excess light receiving level margin) (typical example)

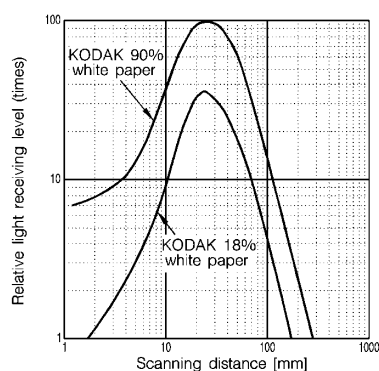


- Detection area characteristics



- Horizontal movement

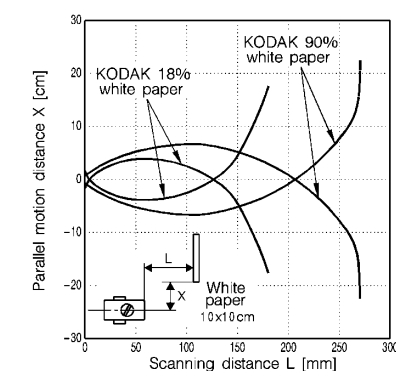

- Vertical movement

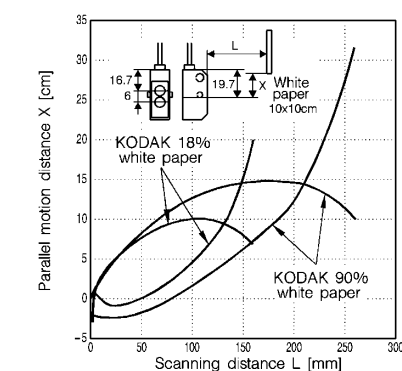

- Sensitivity adjustment potentiometer rotation angle characteristics
- Object characteristics

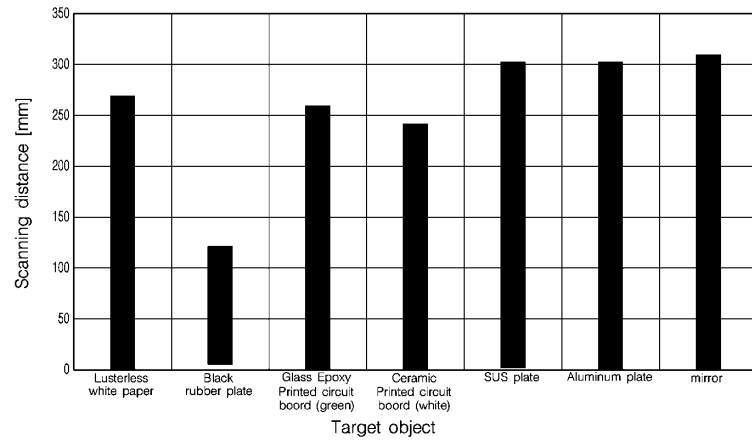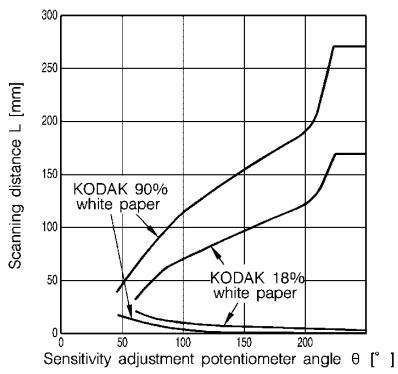



EXTERNAL DIMENSIONS

- Thru-scan

- (Horizontal type) HPJ-T11 (supplied with bracket HPJ-B01)

(unit: mm)

- (Vertical type) HPJ-T21, T22, T23 (supplied with bracket HPJ-B02)

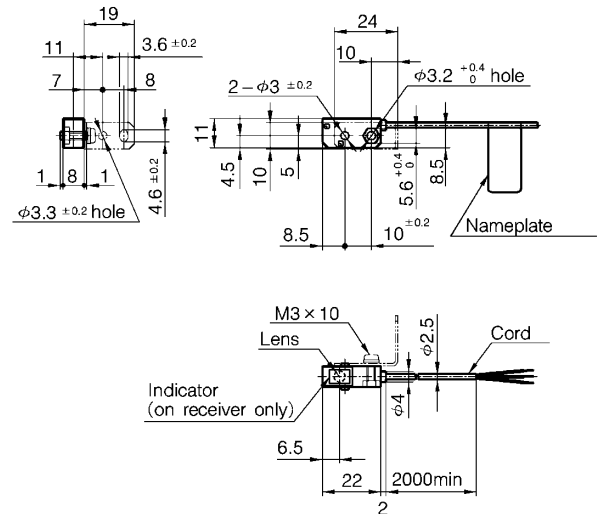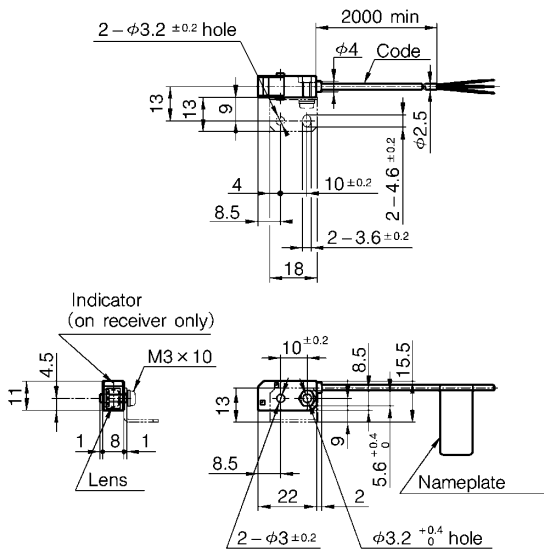


Note: Cord color: Gray (receiver), Black (emitter)

Note: Cord color: Gray (receiver), Black (emitter)


• (Sensitivity adjustment horizontal type) **HPJ-T11G** (supplied with bracket **HPJ-B01**)

(unit: mm)

Receiver

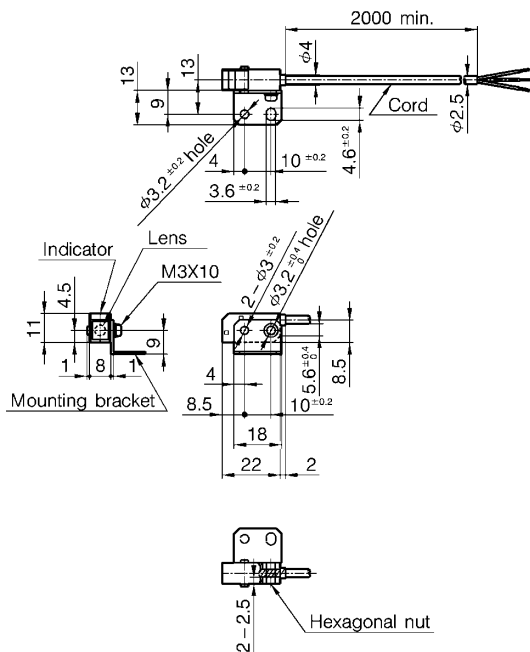


Emitter

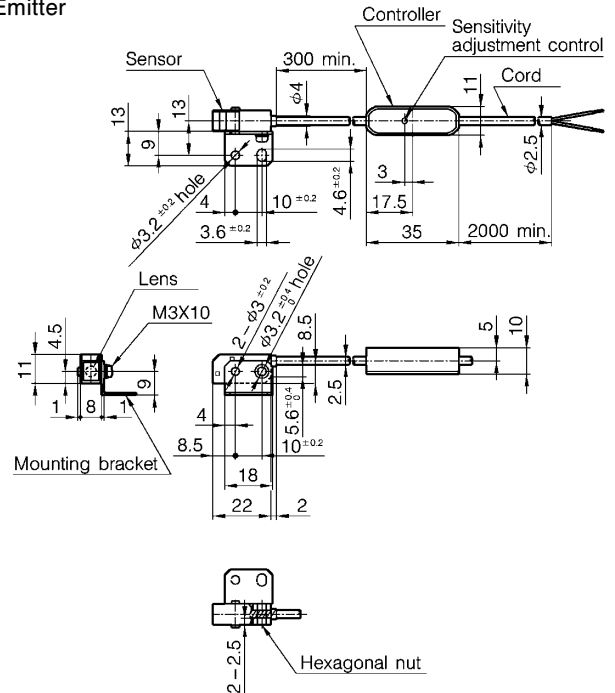


Note: Cord color: Gray (receiver), Black (emitter)

• (sensitivity adjustment vertical type) **HPJ-T21G** (supplied with bracket **HPJ-B02**)

Receiver

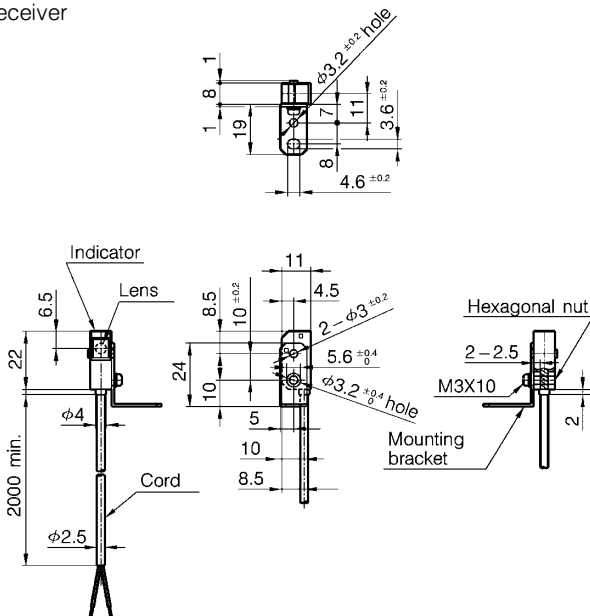


Emitter

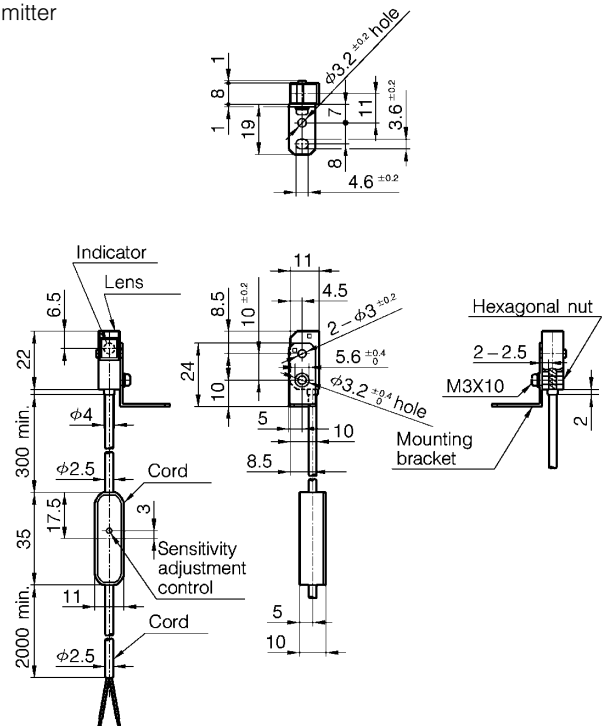

Note: Cord color: Gray (receiver), Black (emitter)


(unit: mm)

- Limited diffuse scan type
- HPJ-D2□, A2□ (bracket supplied)

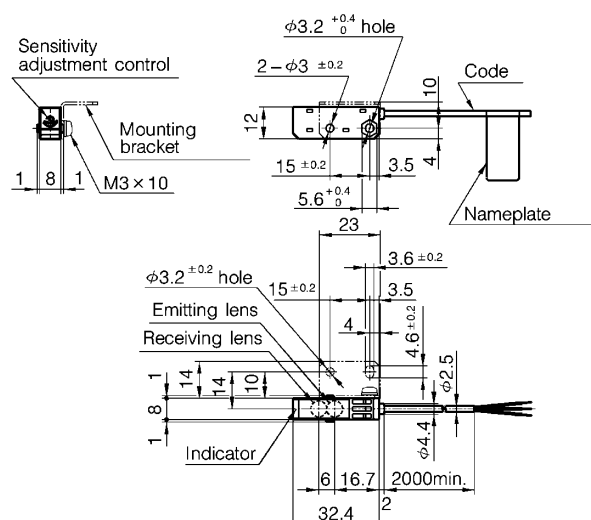


Note: Cord color: Gray


- Bracket (Sold separately)
- Bracket for thru-scan type: HPJ-B01

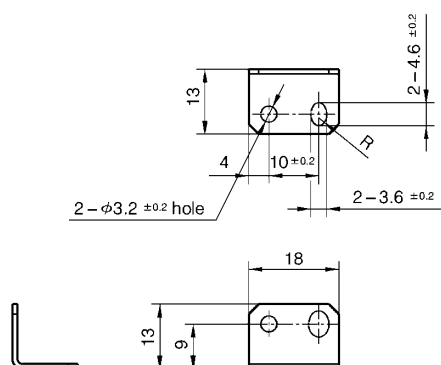

- Bracket for thru-scan type: HPJ-B02

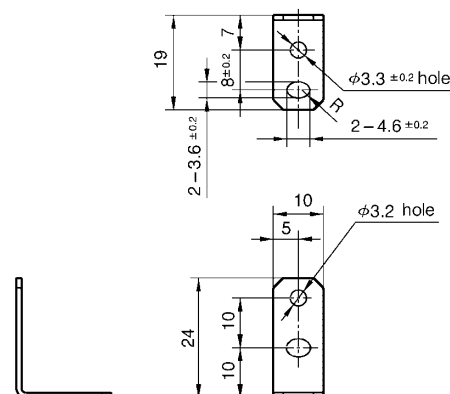


- Slit (attachable on thru-scan type)
- HPJ-U01

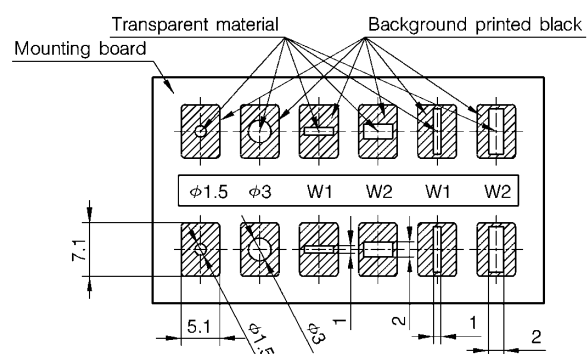


OUTPUT STAGE CIRCUIT DIAGRAM

• Thru-scan type receiver/limited diffuse scan type

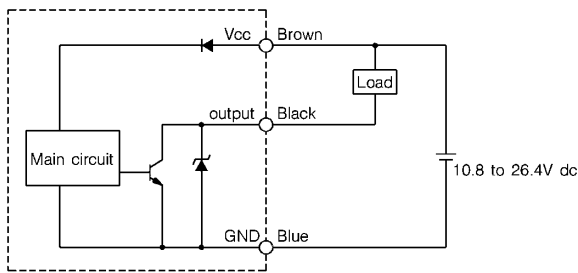

• Thru-scan type emitter

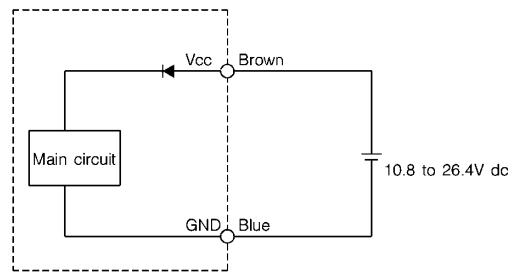

SENSITIVITY ADJUSTMENT

When there are many types of target objects or the sensing position changes, we recommend that operation be checked during trial operation adjustments.


• Thru-scan type

- Temporarily install the emitter and receiver in a straight line so that they face each other.
- Move the emitter vertically and horizontally, and fix it at the center of the area where the receiver's operating indicator turns OFF (turns ON in the case of the **T23**).
- Move the receiver vertically and horizontally, and fix it at the center of the area where its operating indicator turns OFF (turns OFF in the case of the **T23**).
- Place a target between the emitter and receiver. Make sure that the indicator turns ON (turns OFF in the case of the **T23**). The following procedure must be carried out if the sensitivity adjustment control on the **HPJ-T□G** is being adjusted.
- With the target object placed at the predetermined position, gradually rotate the sensitivity adjustment control from MAX towards MIN until the operation indicator turns ON. Take this position as A.
- Next, with no target object placed, gradually rotate the sensitivity adjustment control from MIN towards MAX until the indicator turns OFF. Take this position as B.
- Set the sensitivity adjustment control at position C between A and B.

During this operation, make sure that adjustments are not influenced by light reflected from surrounding objects.

• Limited diffuse scan type

- Mount the photoelectric control facing the sensing position.
- Next, with no target object placed, gradually rotate the sensitivity adjustment control from MAX towards MIN until the indicator turns OFF. Take this position as B.
- If the indicator turns OFF even if the sensitivity adjustment control is at MAX, take the MAX position as A.
- Place the target object at the predetermined position, and gradually rotate the sensitivity adjustment control from MIN towards MAX until the operation indicator turns ON. Take this position as B.
- Set the sensitivity adjustment control at position C between A and B.



BASIC PRECAUTIONS

● Wiring Precautions

- Route the cord separately from electric or power lines or through an exclusive conduit. Otherwise, electrical noise or power surge may cause incorrect operation or damage.
- When extending cords, use 0.3mm² min. cable. Keep the cable length to within 100m.
- When using a commercially available switching regulator, ground the FG (frame ground) terminal. Otherwise, switching noise may cause incorrect operation.
- When using a load that generates rush current (e.g. capacitive load, ramp load), connect a current-limiting resistor between the load and the output. Otherwise, the output may become damaged.
- Do not connect the output terminal without a load. Doing so might damage the output transistor.

● Handling Precautions

- Do not swing the photoelectric control by its cord.
- Do not tug the cord with excessive force (30N or more). Doing so might break the cord.
- The photoelectric control is precision assembled. Do not allow objects to hit the control, in particular, its lens. Scratches or cracks in the lens might impair its characteristics.
- If dirty, wipe with a soft, clean cloth. Do not use benzene, acetone, paint thinner or other organic solvents.
- Do not bend the part of the cord nearest to the photoelectric control with a minimum radius of 20mm. Also, avoid applying continuous bending stress.
- Do not turn the sensitivity adjustment control at a torque greater than 0.02N-m.
- It takes about 1ms for operation to stabilize after the power is turned ON.
- Be careful of mutual interference when two or more photoelectric controls are used in close proximity.
- Tighten the mounting screw at a torque of less than 0.5N-m.
- Do not use in an atmosphere with chemicals (organic solvents, acid, alkali).
- Prevent water or oil from splashing the photoelectric control.
- Confirm stable operation by shielding the hood or changing its mounting direction if ambient light is very strong.
- Do not use outdoors.
- Keep dirt or dust away from the lens by inserting in a sealed case or by applying air purge.
- Avoid use in locations subject to large vibrations or shock which may cause misalignment of the optical axis.

MEMO



CAUTION

The product is designed, developed and manufactured for general-purpose application in machinery and equipment. The product shall be handled with extra caution to provide fail-safe and/or redundant design in the applications listed below that required strict safety.

- applications for physically protecting people
- applications for directly controlling transportation equipment and machinery
- applications for aircraft
- applications for spacecraft
- applications for nuclear reactors

Do not use any of this product for applications where product functions directly influence people's safety.