

New! Highest Density - 2400W in 1U

Genesys™

Programmable DC Power Supplies
2.4kW in 1U

Built in RS-232 & RS-485 Interface
Advanced Parallel Standard

New **Auxiliary Outputs 5V & 15V**
RoHS Compliant

Optional Interfaces:
IEEE488.2 SCPI (GPIB)
Isolated Analog Programming
LXI Compliant LAN



Genesys™ Family

GEN H 750W Half Rack

GEN 1U 750/1500W/2400W Full Rack

GEN 2U 3.3/5kW

GEN 3U 10/15kW

TDK-Lambda

www.us.tdk-lambda.com/hp

The Genesys™ family of programmable power supplies sets a new standard for flexible, reliable, AC/DC power systems in OEM, Industrial and Laboratory applications.

Features include:

- **Highest Power Density 2.4kW in 1U**
- **New: Auxiliary Outputs, 5V, 0.2A; 15V, 0.2A For Increased System Control Functionality**
- **RoHS Compliant**
- **Wide Range of popular worldwide AC inputs, 1Ø (230VAC) & 3Ø (208VAC)**
- **Active Power Factor Correction (Single-Phase & Three-Phase AC Input)**
- **Output Voltage up to 600V, Current up to 300A**
- **Built-in RS-232/RS-485 Interface Standard**
- **Global Commands for Serial RS-232/RS-485 Interface**
- **Auto-Re-Start / Safe-Start: user selectable**
- **Last-Setting Memory**
- High Resolution 16 bit ADCs & DACs
- Low Ripple & Noise
- Front Panel Lock selectable from Front Panel or Software
- Reliable Encoders for Voltage and Current Adjustment
- Constant Voltage/Constant Current auto-crossover
- Parallel Operation with Active Current Sharing; up to four identical units.
- Advanced Parallel Master / Slave. Total Current is Programmed and Measured via the Master.
- Independent Remote ON/OFF and Remote Enable/Disable
- External Analog Programming and Monitoring (user selectable 0-5V & 0-10V)
- Reliable Modular and SMT Design
- 19" Rack Mount capability for ATE and OEM applications
- Optional Interfaces
 - Isolated Analog Programming and Monitoring Interface (0-5V/0-10V & 4-20mA)
 - IEEE 488.2 SCPI (GPIB) Multi-Drop
 - LXI** Compliant LAN
- LabView and LabWindows™ drivers
- Five Year Warranty



Worldwide Safety Agency Approvals; CE Mark for LVD and EMC Regulation

Applications

Genesys™ power supplies have been designed to meet the demands of a wide variety of applications. System Designers will appreciate new, standard, remote programming features such as Global commands. Also, new high-speed status monitoring is available for the RS-485 bus.

Test Systems using the IEEE-488 bus may achieve significant cost savings by using the IEEE Multi-Drop Interface for a Master and up to 30 RS-485 Multi-Drop Slaves. Then up to 30 Slaves may be used with the less expensive standard RS-485 Multi-Drop interface.

Higher power systems can be configured with up to four 2.4kW modules. Each module is 1U with zero space between them (zero stack).

Flexible configuration is provided by the complete Genesys™ Family: 1U 750W Half-Rack, 1U 750W/1500W/2400W 2U 3.3kW/5kW, 3U 10/15kW Full-Rack. All are identical in Front Panel, Rear Panel Analog, and all Digital Interface Commands.

OEM Designers have a wide variety of Inputs and Outputs from which to select depending on application and location.

Front Panel Description



1. ON/OFF Switch
2. Air Intake allows zero stacking for maximum system flexibility and power density.
3. Reliable encoder controls Output Voltage, Address, OVP and UVL settings.
4. Volt Display shows Output Voltage and directly displays OVP, UVL and Address settings.
5. Reliable encoder controls Output Current, sets Baud rate and Advanced Parallel mode.
6. Current Display shows Output Current and displays Baud rate. Displays total current in Parallel Master/Slave Mode
7. Function/Status LEDs:

● Alarm	● Fine Control	● Preview Settings
● Foldback Mode	● Remote Mode	● Output On
8. Pushbuttons allow flexible user configuration
 - Coarse and Fine adjustment of Output Voltage/Current and Advanced Parallel Master or Slave
 - Preview settings and set Voltage/Current with Output OFF, Front Panel Lock
 - Parallel Master/Slave
 - Set OVP and UVL Limits
 - Set Current Foldback Protection
 - Go to Local Mode and select Address and Baud rate
 - Output ON/OFF and Auto/Safe Re-Start Mode

Rear Panel Description



1. Remote/Local Output Voltage Sense Connections.
2. DIP Switches select 0-5V or 0-10V Programming and other functions.
3. DB25 (Female) connector allows (Non-isolated) Analog Program and Monitor and other functions.
4. RS-485 OUT to other Genesys™ Power Supplies.
5. RS-232/RS-485 IN Remote Serial Programming.
6. Output Connections: Rugged busbars for up to 100V Output; wire clamp connector (shown) for Outputs >100V.
7. Exit air assures reliable operation when zero stacked.
8. Input: 230VAC Single Phase, 208 VAC Three Phase, 50/60 Hz
AC Input Connector: Phoenix P/N: FRONT-4-H-7.62.
9. Optional Interface Position for IEEE 488.2 SCPI (shown) or Isolated Analog, or LAN Interface.
10. Auxiliary Output Voltage Connector. Phoenix P/N IMC1.5/7-ST-3.81

Genesys™ 2.4kW Specifications

1.0 MODEL	GEN	8-300	10-240	16-150	20-120	30-80	40-60	60-40	80-30	100-24	150-16	300-8	600-4
1.Rated Output voltage(*1)	V	8	10	16	20	30	40	60	80	100	150	300	600
2.Rated Output Current(*2)	A	300	240	150	120	80	60	40	30	24	16	8	4
3.Rated Output Power	W	2400	2400	2400	2400	2400	2400	2400	2400	2400	2400	2400	2400

1.1 CONSTANT VOLTAGE MODE

1.Max.line regulation (0.01% of rated Vo+2mV)(*6)		mV	2.8	3	3.6	4	5	6	8	10	12	17	32	62
2.Max load regulation (0.015% of rated Vo+5mV)(*7)		mV	6.2	6.5	7.4	8	9.5	11	14	17	20	27.5	50	95
3.Ripple and noise p-p 20MHz (*8)		mV	60	60	60	60	60	60	60	80	80	100	200	300
4.Ripple r.m.s 5Hz~1MHz		mV	8	8	8	8	8	8	8	8	8	25	50	75
5.Remote sense compensation/wire		V	2	2	2	2	5	5	5	5	5	5	5	5
6.Temperature coefficient		PPM/°C	100PPM/°C of rated output voltage, following 30 minutes warm-up											
7.Temperature stability			0.05% of rated Vout over 8hrs interval following 30 minutes warm-up. Constant line, load & temp.											
8.Warm-up drift			Less than 0.05% of rated output voltage+2mV over 30 minutes following power On.											
9.Up-prog. response time, 0~Vo Rated (*9)		mS	30	50				70		80		100	150	200
10.Down-prog response time	Full-load (*9)	mS	20	50				80		120		200	250	300
	No-load (*10)	mS	500	600				900	1000	1100	1200	1500	2500	3500
11.Transient response time		mS	Time for output voltage to recover within 0.5% of its rated output for a load change 10-90% of rated output current. Output set-point: 10-100%, local sense. Less than 1mSec for models up to and including 100V. 2msec for models above 100V											

1.2 CONSTANT CURRENT MODE

1.Max.line regulation (0.01% of Io rated+2mA)(*6)	mA	32	26	17	14	10	8	6	5	4.4	3.6	2.8	2.4
2.Max.load regulation (0.02% of Io rated+5mA)(*11)	mA	65	53	35	29	21	17	13	11	9.8	8.2	6.6	5.8
3.Ripple r.m.s 5Hz~1MHz. (*12)	mA	1200	960	600	480	220	120	70	50	40	30	15	7
4.Temperature coefficient	PPM/°C	100PPM/°C from rated output current, following 30 minutes warm-up.											
5.Temperature stability		0.05% of rated Iout over 8hrs. interval following 30minutes warm-up. Constant line, load & temperature.											
6.Warm-up drift		8V~20V models: Less than ±0.5% of rated output current over 30 minutes following power On.											
		30V~600V models: Less than ±0.25% of rated output current over 30 minutes following power On.											

1.3 PROTECTIVE FUNCTIONS

1. OCP	0~105% Constant Current												
2. OCP Foldback	Output shut down when power supply changes from CV to CC. User selectable.												
3. OVP type	Inverter shut-down, manual reset by AC input recycle or by OUT button or by communication port command.												
4. OVP trip point	0.5~10V 0.5~12V 1~19V 1~24V 2~36V 2~44V 5~66V 5~88V 5~110V 5~165V 5~330V 5~660V												
5. Output Under Voltage Limit	Preset by front panel or communication port. Prevents from adjusting Vout below limit.												
6. Over Temperature Protection	User selectable , latched or non-latched.												

1.4 ANALOG PROGRAMMING AND MONITORING

1.Vout Voltage Programming	0~100%, 0~5V or 0~10V, user select. Accuracy and linearity:±0.5% of rated Vout.												
2.Iout Voltage Programming (*13)	0~100%, 0~5V or 0~10V, user select. Accuracy and linearity:±1% of rated Iout.												
3.Vout Resistor Programming	0~100%, 0~5/10kohm full scale,user select.,Accuracy and linearity: ±1% of rated Vout.												
4.Iout Resistor Programming (*13)	0~100%, 0~5/10kohm full scale,user select. Accuracy and linearity:±1.5% of rated Iout.												
5.On/Off control (rear panel)	By electrical signal. Voltage: 0~0.6V/2~15V, or dry contact, user selectable logic.												
6.Output Current monitor (*13)	0~5V or 0~10V, Accuracy:±1%, user selectable.												
7.Output Voltage monitor	0~5V or 0~10V, Accuracy:±1%, user selectable.												
8.Power Supply OK signal	TTL high (4~5V) -OK, 0V-Fail 500ohm series resistance.												
9. CV/CC Indicator	Open Collector. CC Mode: ON, CV Mode: OFF. Maximum Voltage: 30V, Maximum sink current: 10mA.												
10. Enable/Disable	Dry contact. Open:off , Short: on. Max. voltage at Enable/Disable in: 6V.												
11. Local/Remote analog control	By electrical signal or Open/Short: 0~0.6V or short: Remote, 4~5V or open: Local.												
12. Local/Remote analog control Indicator	Open collector, Local: Off, Remote: On. Maximum voltage: 30V, maximum sink current: 10mA.												

1.5 FRONT PANEL

1.Control functions	Vout/ Iout manual adjust by separate encoders (coarse and fine adjustment selectable). OVP/UVL manual adjust by Voltage Adjust encoder. On/Off, Output ON/OFF, Re-start modes (auto, safe), Foldback control (CV to CC), Go to local control. Address selection by Voltage (or current) adjust encoder. Number of addresses:31. Re-start modes (automatic restart, safe mode). Baud rate selection: 1200,2400,4800,9600 and 19,200.												
2.Display	Voltage: 4 digits , Accuracy: 0.5% of rated output Voltage ±1 count. Current: 4 digits, Accuracy: 0.5% of rated output current ±1 count.												
3.Indications	Voltage, Current, Alarm, Fine, Preview, Foldback, Local, Output On, Front Panel Lock, CV/CC.												

1.6 Interface RS-232&RS-485 or Optional GPIB / LAN Interface

Model	V	8	10	16	20	30	40	60	80	100	150	300	600
1. Remote Voltage Programming (16 bit)													
Resolution (0.012% of Vo Rated)	mV	0.96	1.2	1.92	2.4	3.6	4.8	7.2	9.6	12	18	36	72
Accuracy (0.05%Vo Rated+0.05% of Vo Actual Output)	mV	8	10	16	20	30	40	60	80	100	150	300	600
2. Remote Current Programming (16 bit)													
Resolution (0.012% of Io Rated)	mA	36	28.8	18	14.4	9.6	7.2	4.8	3.6	2.88	1.92	0.96	0.48
Accuracy (0.2%Io Rated+0.1% of Io Actual Output) (*13)	mA	900	720	450	360	240	180	120	90	72	48	24	12
3. Readback Voltage													
Resolution (0.012% of Vo Rated)	mV	0.96	1.2	1.92	2.4	3.6	4.8	7.2	9.6	12	18	36	72
Accuracy (0.1%Vo Rated+0.1% of Vo Actual Output)	mV	16	20	32	40	60	80	120	160	200	300	600	1200
4. Readback Current													
Resolution (0.012% of Io Rated)	mA	36	28.8	18	14.4	9.6	7.2	4.8	3.6	2.88	1.92	0.96	0.48
Accuracy (0.3% Io Rated+0.1% of Io Actual Output) (*13)	mA	1200	960	600	480	320	240	160	120	96	64	32	16
5. OVP/UVL Programming													
Resolution (0.1% of Vo Rated)	mV	8	10	16	20	30	40	60	80	100	150	300	600
Accuracy (1% of Vo Rated)	mV	80	100	160	200	300	400	600	800	1000	1500	3000	6000

*1: Minimum voltage is guaranteed to maximum 0.2% of rated output voltage.

*2: Minimum current is guaranteed to maximum 0.4% of rated output current.

*3: For cases where conformance to various safety standards (UL, IEC, etc) is required, to be described as 190-240Vac (50/60Hz) for 3-Phase 208V models.

*4: 3-Phase 208V models: At 208Vac input voltage, With rated output power.

*5: Not including EMI filter inrush current, less than 0.2mSec.

*6: 3-Phase 208V models: 170~265Vac, constant load.

*7: From No-Load to Full-Load, constant input voltage. Maximum drop in Remote Sense.

*8: For 8V~300V models: Measured with JEITA RC-9131A (1:1) probe. For 600V model: Measured with 10:1 probe.

*9: From 10% to 90% or 90% to 10% of Rated Output Voltage, with rated, resistive load.

*10: From 90% to 10% of Rated Output Voltage.

*11: For load voltage change, equal to the unit voltage rating, constant input voltage.

*12: For 8V~16V models the ripple is measured from 2V to rated output voltage and rated output current. For other models, the ripple is measured at 10~100% of rated output voltage and rated output current.



*13: The Constant Current programming readback and monitoring accuracy does not include the warm-up and Load regulation thermal drift.

Genesys™ 2.4kW Specifications

2.1 INPUT CHARACTERISTICS		GEN	8-300	10-240	16-150	20-120	30-80	40-60	60-40	80-30	100-24	150-16	300-8	600-4
1. Input voltage/freq. (*3)		VAC	Single Phase,230V models: 170~265Vac, 47~63Hz 3-Phase, 208Vac models: 170~265Vrms , 47~63Hz											
2. Maximum Input current at 100% load	1-Phase,230V models:	Arms	17	17	17	16.3	16.3	16.3	16.3	16.3	16.3	16.3	16.3	16.3
	3-Phase, 208V models:		10.5	10.5	10.5	9.8	9.8	9.8	9.8	9.8	9.8	9.8	9.8	9.8
3.Power Factor (Typ)			Single Phase models: 0.99@230Vac, rated output power. 3-Phase models: 0.94@208 Vac, rated output power.											
4. Efficiency (*4)		%	84	84	86	86	88	88	88	88	88	88	88	87
5. Inrush Current (5)		A	Single-Phase and 3-Phase 208V models: Less than 50A											
6. Hold up time (CV Mode)		mS	10mSec for Single-Phase and 3-phase 208V models, at rated output power.											
2.2 AUXILIARY OUTPUT														
1. 15V output		15V±5%, 0.2A Max load, Ripple & Noise 100mVp-p. Referenced internally to the negative output potential.												
2. 5V output		5V±5%, 0.2A Max load, Ripple & Noise 100mVp-p. Referenced internally to IF_com potential.												
2.3 POWER SUPPLY CONFIGURATION														
1. Parallel Operation		Up to Four (4) identical units may be connected in Master/Slave Mode with two wire connection. In Advanced parallel feature, the current of Master Unit, multiplied by number of units connected in parallel, is made available on digital interface and displayed on front panel of Master unit. Remote analog current monitor of the Master is scaled to output current of the Master unit (only).												
2. Series Operation		Possible (with external diodes), up to identical 2 units with total output not to exceed +/-600V from chassis ground.												
2.4 ENVIRONMENTAL CONDITIONS														
1. Operating temperature		0~50°C, 100% load.												
2. Storage temperature		-20~85°C												
3. Operating humidity		20~90% RH (non-condensing).												
4. Storage humidity		10~95% RH (non-condensing).												
5. Vibration		MIL-810F, method 514.5 , The EUT is fixed to the vibrating surface.												
6. Shock		Less than 20G , half sine , 11mSec. Unit is unpacked.												
7. Altitude		Operating: 10000ft (3000m), Derate output current by 2%/100m above 2000m, Alternatively, derate maximum ambient temp. by 1°C/100m above 2000m. Non operating: 40000ft (12000m).												
8. RoHS Compliance		Complies with the requirements of RoHS directive.												
2.5 EMC														
1. Applicable Standards:														
2. ESD		IEC1000-4-2. Air-disch.-8kV, contact disch.-4kV												
3. Fast transients		IEC1000-4-4. 2kV												
4. Surge immunity		IEC1000-4-5. 1kV line to line, 2kV line to ground												
5. Conducted immunity		IEC1000-4-6, 3V												
6. Radiated immunity		IEC1000-4-3, 3V/m												
7. Magnetic field immunity		EN61000-4-8, 1A/m												
8. Voltage dips		EN61000-4-11												
9. Conducted emission		EN55022A, FCC part 15-A, VCCI-A.												
10. Radiated emission		EN55022A, FCC part 15-A, VCCI-A.												
2.6 SAFETY														
1.Applicable standards:		CE Mark, UL60950-1-2007(ED2), IEC60950-1-2005 (ED2), EN60950-1-2006 (ED2) + A11:2009 Vout≤40V:Output is SELV, IEEE/Isolated analog are SELV. 40<Vout≤400V: Output is hazardous, IEEE/Isolated analog are SELV. 400<Vout≤600V:Output is hazardous, IEEE/Isolated analog are not SELV.												
2.Withstand voltage		Vout≤40V models :Input-Outputs (SELV): 4242VDC 1min, Input-Ground: 2828VDC 1min. 40<Vout≤100V models: Input-Haz. Output: 2600VDC 1min, Input-SELV: 4242VDC 1min. Hazardous Output.-SELV: 1900VDC 1min, Hazardous Output-Ground:1200VDC 1min. Input-Ground: 2828VDC 1min. 100<Vout≤600V models: Input-Haz. Output: 4000VDC 1min, Input-SELV: 4242VDC 1min. Hazardous Output.-SELV: 3550VDC 1min. Hazardous Output-Ground:2670VDC 1min. Input-Ground: 2828VDC 1min.												
3.Insulation resistance		More than 100Mohm at 25°C , 70% RH.												
2.7 MECHANICAL CONSTRUCTION														
1. Cooling		Forced air flow: from front to rear. No ventilation holes at the top or bottom of the chassis; Variable fan speed.												
2. Dimensions (WxHxD)		W: 423mm / 16.65" H: 43.6mm / 1.72" D: 432.8mm / 17" (excluding connectors, encoders, handles, etc.)												
3. Weight		10 kg. / 22lbs												
4. AC Input connector (with Protective Cover)		Single Phase,230V models, wire clamp connector, Phoenix P/N: FRONT-4-H-762, with Strain relief. 3-Phase, 208V models, wire clamp connector, Phoenix P/N: FRONT-4-H-762, with Strain relief.												
5.Output connectors		8V to 100V models: Bus-bars (hole Ø 8.5mm/0.33"). 150V to 600V models: wire clamp connector, Phoenix P/N: FRONT-4-H-762 Auxiliary output Header: IMC 1.5/7-G-3.81, Plug: IMC 1.5/7-ST-3.81 (Phoenix Contact).												
2.7 Warranty														
1. Warranty		5 years.												

All specifications subject to change without notice.

Outline Drawing Genesys™ 2.4kW Units

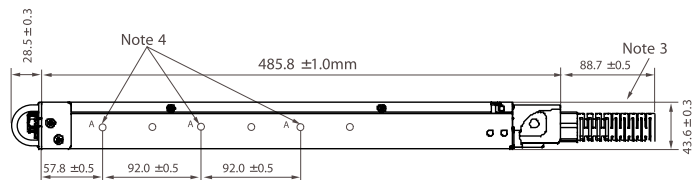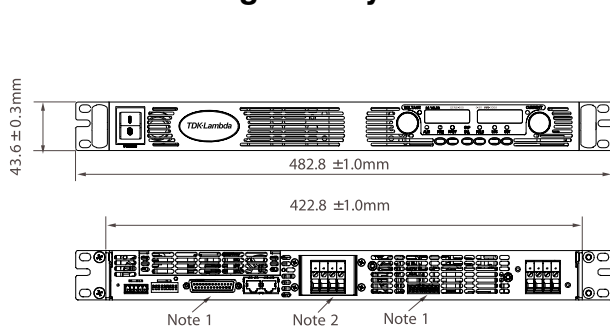

NOTE

1. Mating plug supplied with power supply
2. Bus bars for 8V to 100V models
Wire clamp connector (shown) for 150V to 600V models
3. AC Cable strain relief supplied with power supply
4. Chassis slides mounting holes #10-32 marked "A"
GENERAL DEVICES P/N: CC3001-00-S160 or equivalent

Genesys™ Power Parallel and Series Configurations

Parallel operation - Master/Slave:

Active current sharing allows up to four identical units to be connected in an auto-parallel configuration for four times the output power.

In Advanced Parallel Master/Slave Mode, total current is programmed and reported by the Master, Up to four supplies act as one.



Series operation

Up to two units may be connected in series to increase the output voltage or to provide bipolar output. (Max 600V to Chassis Ground).



Remote Programming via RS-232 & RS-485 Interface

Standard Serial Interface allows daisy-chain control of up to 31 power supplies on the same communication bus with built-in RS-232 & RS-485 Interface.



Programming Options (Factory installed)

New IEEE Multi-Drop Interface

- Allows IEEE Master to control up to 30 slaves over RS-485 daisy-chain
- Only the Master needs be equipped with IEEE Interface
- IEEE 488.2 SCPI Compliant
- Program Voltage
- Measure Voltage
- Over Voltage setting and shutdown
- Error and Status Messages
- Program Current
- Measure Current
- Current Foldback shutdown

P/N: IEMD

New Multi-Drop Slave Option

- Now Standard. All units operate in digital chain.

P/N: N/A

Isolated Analog Programming

- Four Channels to Program and Monitor Voltage and Current.
- Isolation allows operation with floating references in harsh electrical environments.
- Choose between programming with Voltage or Current.
- Connection via removable terminal block: Phoenix MC1,5/8-ST-3.81.
- Voltage Programming, user-selectable 0-5V or 0-10V signal.
 - Power supply Voltage and Current Programming Accuracy $\pm 1\%$
 - Power supply Voltage and Current Monitoring Accuracy $\pm 1.5\%$
- Current Programming with 4-20mA signal.
 - Power supply Voltage and Current Programming Accuracy $\pm 1\%$
 - Power supply Voltage and Current Monitoring Accuracy $\pm 1.5\%$

P/N: IS510

P/N: IS420

LAN Interface

~~LXI~~ Compliant to Class C

- **New:** Adds TCP and UDP Sockets
- **New:** Larger Input Buffer
- Meets all LXI-C Requirements
- Address Viewable on Front Panel
- Fixed and Dynamic Addressing
- Fast Startup
- **New:** Adds Multiple Controllers
- **New:** Improved Network Security
- VISA & SCPI Compatible
- LAN Fault Indicators
- Auto-detects LAN Cross-over Cable
- Compatible with most standard Networks

P/N: LAN

Power Supply Identification / Accessories

How to order

GEN	8	- 300	-	-
Series Name	Output Voltage (0~8V)	Output Current (0~300A)	Factory Options Option: IEMD IS510 IS420 LAN	AC Input Options 1P230 (Single Phase 170~265VAC) 3P208 (Three Phase 170~265VAC)

Models 2.4kW

Model	Output Voltage VDC	Output Current (A)	Output Power (W)
GEN 8-300	0~8V	0~300	2400
GEN 10-240	0~10V	0~240	2400
GEN 16-150	0~16V	0~150	2400
GEN 20-120	0~20V	0~120	2400
GEN 30-80	0~30V	0~80	2400
GEN 40-60	0~40V	0~60	2400

Model	Output Voltage VDC	Output Current (A)	Output Power (W)
GEN 60-40	0~60V	0~40	2400
GEN 80-30	0~80V	0~30	2400
GEN 100-24	0~100V	0~24	2400
GEN 150-16	0~150V	0~16	2400
GEN 300-8	0~300V	0~8	2400
GEN 600-4	0~600V	0~4	2400

Factory options

RS-232/RS-485 Interface built-in Standard
 GPIB (Multi-Drop Master) Interface*
 Voltage Programming Isolated Analog Interface*
 Current Programming Isolated Analog Interface*
 LAN Interface (Complies with **LXI** Class C)*
 * Limit of one interface option per supply

P/N

-
 IEMD
 IS510
 IS420
 LAN

Accessories

1. Serial Communication cable

RS-232/RS-485 cable is used to connect the power supply to the Host PC.

Mode	RS-485	RS-232	RS-232
PC Connector	DB-9F	DB-9F	DB-25F
Communication Cable	Shield Ground L=2m	Shield Ground L=2m	Shield Ground L=2m
Power Supply Connector	EIA/TIA-568A (RJ-45)	EIA/TIA-568A (RJ-45)	EIA/TIA-568A (RJ-45)
P/N	GEN/485-9	GEN/232-9	GEN/232-25

2. Serial link cable*

Daisy-chain up to 31 Genesys™ power supplies.

Mode	Power Supply Connector	Communication Cable	P/N
RS-485	EIA/TIA-568A (RJ-45)	Shield Ground L=50cm	GEN/RJ45

* Included with power supply



Also available, Genesys™

1U Half Rack 750W

1U Full Rack 750W/1500W/2400W

2U Full Rack 3300W

3U Full Rack 10/15kW

USA

TDK-Lambda Americas Inc.
405 Essex Rd. Neptune, NJ 07753
Tel: +1-732-922-9300 Fax: +1-732-922-1441
E-mail: sales@us.tdk-lambda.com
Web: www.us.tdk-lambda.com/hp

CANADA

ACA TMetrix
5805 Kennedy Road, Mississauga, Ontario, L4Z 2G3
Tel: +1-800-665-7301 Fax: +1-905-890-1959
Email: lambda@aca.ca
Web: tmetrix.com

MEXICO

AcMax De Mexico
Rosas 139 Col. Bugambilias. Puebla, Pue. C.P. 72580
Tel: +52-800-211-0060, Fax: +52-264-1445
Email: virgilio@acmax.com.mx
Web: www.acmax.com.mx

BRAZIL

Suplitech
Rua Sena Madureira 455, Belo Hte - 31340-000
Tel: +55-31-3498 1177 Fax: +55-31-3441 0841
Email: vendas@suplitech.com.br
Web: www.suplitech.com.br

UK

TDK-Lambda UK
Kingsley Avenue
Ilfracombe, Devon EX 34 8ES
Tel: +44-1271-856666 Fax: +44-1271-864894
E-mail: powersolutions@uk.tdk-lambda.com
Web: www.uk.tdk-lambda.com

IRELAND

FRANCE

TDK-Lambda France
ZAC des Delaches BP 1077 - Gometz le Chatel
91940 LES ULIS
Tel: +33 1 60 12 71 65 Fax: +33 1 60 12 71 66
Email: france@fr.tdk-lambda.com
Web: www.fr.tdk-lambda.com

NETHERLANDS

SPAIN

GERMANY

TDK-Lambda Germany
Karl-Bold-Str.40, D-77855 Achern
Tel: +49-7841-666-0 Fax: +49-7841-500-0
E-mail: info@de.tdk-lambda.com
Web: www.de.tdk-lambda.com

AUSTRIA

SWITZERLAND

SCANDINAVIA

BALTICS

ITALY

TDK-Lambda Italy
Via dei Lavoratori 128/130
IT 20092 Cinisello Balsamo (MI)
Tel: +39-02-6129-3863 Fax: +39-02-6129-0900
E-mail: info.italia@it.tdk-lambda.com
Web: www.it.tdk-lambda.com

JAPAN

TDK-Lambda Corporation
International Sales Division,
Nittetsu Bldg. 6F, 1-13-1 Nihonbashi, Chuo-ku,
Tokyo 103-0027
Tel: +81 3 3447 4693 Fax: +81 3 3447 4750
Web: www.tdk-lambda.com

CHINA

TDK-Lambda Shanghai Office
28F, Xingyuan Technology Building No.418, Guiping Road,
Shanghai, 200233 P.R. CHINA
Tel: +86-21-6485-0777 Fax: +86-21-6485-0666
Web: www.cn.tdk-lambda.com

TDK-Lambda Beijing Office
Room 12B11-12B12, Unit 7 DACHENG SQUARE,
No.28 Xuanwumenxi Street, Xuanwu District Beijing,
100053, P.R. CHINA
Tel: +86-10-6310-4872 Fax: +86-10-6310-4874
Web: www.cn.tdk-lambda.com

TDK-Lambda Hong Kong Office
Room. 8, 27/F, Mega Trade Center
1 Mei Wan St. Tsuen Wan, N.T.
Tel: +852-2420-6693 Fax: +852-2420-3362
Web: www.cn.tdk-lambda.com

KOREA

TDK-Lambda Corporation
6F Songok Bldg. 4-1 Soonae-Dong
Pundang-Gu, Songnam-Shi Kyonggi-Do, 463-020
Tel: +82-2-556-1171 Fax: +82-2-555-2706
Web: www.tdk-lambda.co.kr

MALAYSIA

TDK-Lambda Malaysia
No.73, 7th Floor, Jaya Shopping Center,
Jalan Semangat Section 14, 46100
Petaling Jaya Selangor, D.E
Tel: +60-3-7957-8800 Fax: +60-3-7958-2400
Web: www.tdk-lambda.com.my

SINGAPORE

TDK-Lambda Singapore
1008 Toa Payoh North # 06-01/08
Singapore 318996
Tel: +65-6251-7211 Fax: +65-6250-9171
Web: www.se.tdk-lambda.com

PHILIPPINES

THAILAND

INDIA

TDK-Lambda India
New Bridge Business Centers
No. 412, 2nd Floor, Jinal Center, 100 Feet Road, Kovamangala
Bangalore, 560 034
Tel: +91-80-64503815 Fax: +91-80-41467450
Web: www.in.tdk-lambda.com

ISRAEL

RUSSIA

Nemic Lambda Ltd.
Kibbutz Givat Hashlosha Tel-Aviv 48800
Tel: +972-3-9024-333 Fax: +972-3-9024-777
E-mail: info@nemic.co.il
Web: www.nemic.co.il



TDK-Lambda Americas Inc. 405 Essex Road, Neptune, NJ 07753 USA
Tel: +1 732 922 9300 Fax: +1 732 922 1441
www.us.tdk-lambda.com/hp