

New Search Information/Support

Select Application

Enter Inputs

Show Solutions


Solutions Details



Solution

	Left Model	Right Model	Stabilizer
Model	HR16-400	HR16-400	None
Quantity	3	3	N/A
Configuration	45° Comp/Roll	45° Comp/Roll	N/A
Height (in)	5.5	5.5	N/A
Width (in)	6.5	6.5	N/A
Length (in)	9.5	9.5	N/A
Kv (lb/in) ?	783	783	N/A
Ks (lb/in) ?	470	470	N/A
Max Deflection (in)	3.5	3.5	N/A
Max Static Load (lb)	240	240	N/A
Files	Catalog	Catalog	

CREATE PDF

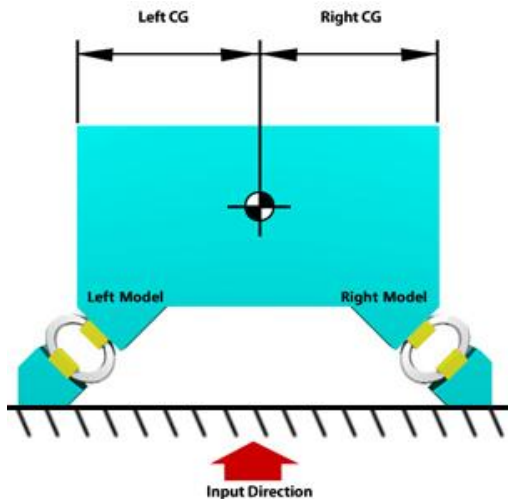

Inputs

Configuration	45° Comp/Roll
Total Weight (lb)	1000
Left CG	=
Right CG	=
Supported Load Width (in)	21
Supported Load Height (in)	21
Supported Load Length (in)	207
Min Freq. (Hz)	6
Max Freq. (Hz)	16

Performance Output

F _n (Hz)	6.8
A _o (g's)	N/A
F _s (Hz)	N/A
Dyn. Defl. (in)	N/A