



ITT

Enidine



Wire Rope & HERM Isolators

[Login](#)[New Search](#)[Information/Support](#)[Select Application](#)[Enter Inputs](#)[Show Solutions](#)[Solutions Details](#)

1

2

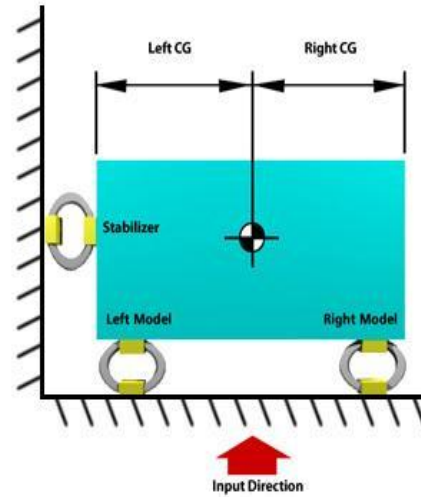
3

4



Solution

	Left Model	Right Model	Stabilizer
Model	WR16-206-06	WR16-206-06	WR16-306-06
Quantity	2	2	2
Configuration	Compression	Compression	Roll
Height (in)	3	3	3.25
Width (in)	3.63	3.63	4
Length (in)	7	7	7
Kv (lb/in) ?	5317	5317	623
Ks (lb/in) ?	2613	2613	623
Max Deflection (in)	1.3	1.3	1.6
Max Static Load (lb)	800	800	193
Files	Catalog	Catalog	Catalog

[CREATE PDF](#)

Inputs

Configuration	Compression
Total Weight (lb)	1000
Left CG	=
Right CG	=
Supported Load Width (in)	26
Supported Load Height (in)	75
Supported Load Length (in)	22
Min Freq. (Hz)	6
Max Freq. (Hz)	16

Performance Output

F _n (Hz)	14.8
A _o (g's)	N/A
F _s (Hz)	N/A
Dyn. Defl. (in)	N/A