




Order Code	TCK-141
Inductance	5.6 μ H $\pm$ 20% (at 100 kHz / 250 mV)
Impedance (DCR)	90 m Ω max.
Rated Current	3.5 A max.
Operating Temperature	-55°C to +125°C




Impedance Curve

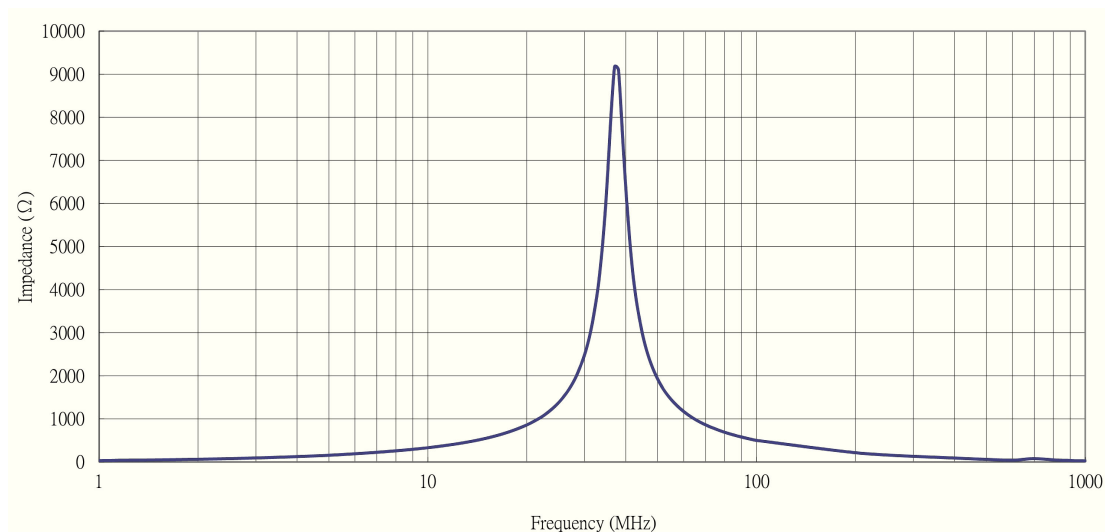

Outline Dimensions

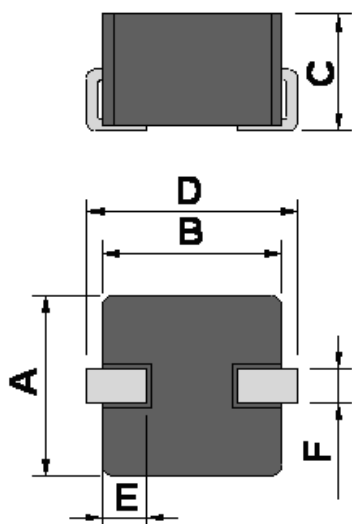

PCB PATTERN



Dimensions [mm]

A	4.0 $\pm$ 0.3
B	4.0 $\pm$ 0.3
C	2.1 max.
D	4.7 max.
E	1.0 $\pm$ 0.3
F	0.6 $\pm$ 0.1
G	2.2
H	6.0
I	1.5