



W119 Single Console



Drawer Features & Display Benefits

- ▶ 1U 19" widescreen LCD console drawer
- ▶ 104-key keyboard with either touchpad or trackball
- ▶ New enhanced aesthetics with molded front handle
- ▶ Short depth design of 460mm (18.1") only
- ▶ Front USB port for device access (USB Hub KVM only)

Options

- 3G / HD / SD-SDI Broadcast-grade input (w/ speaker)
- S-Video + Composite (BNC)
- HDMI (w/ speaker)
- **ORB-2.1** 2-post rack mounting brackets
- DC power : 12V / 24V / 48V / 125V / 250V

Specifications

• LCD Panel

Manufacturer :	
Size (diagonal) :	19" widescreen TFT
Max resolution :	1440 x 900
Brightness (cd/m2) :	300
Backlight :	CCFL
Colors :	16.7M
Contrast ratio (typ) :	1000 : 1
Viewing angle (H/V) :	160° x 160°
Active area (mm) :	408 x 255
MTBF (hrs) :	50,000
Video input :	VGA or DVI-D

- **Speaker :** Built-in Dual Stereo Speakers
(HDMI only) 2W x 2

- **Casing Color :** Black (RAL 9005)

- **Power Input :** Auto-sensing 100 to 240VAC,
50 / 60Hz

• Power Consumption (single console)

Screen on :	Max. 25W
Power saving mode :	Max. 4W
Power button on :	Max. 1W

• Environmental

Operating temperature :	0 to 55°C degree
Storage temperature :	-20 to 60°C degree
Operating humidity :	20~90%, non-condensing
Storage humidity :	5 ~90%, non-condensing
Operating altitude :	16,000 ft
Non-operating altitude :	40,000 ft
Shock :	10G acceleration (11ms duration)
Vibration :	5~500Hz 1G RMS random vibration

• Regulatory

Safety :	cUL, FCC & CE certified
Environmental :	RoHS2 & REACH compliant

• Weight (single console)

Net :	11.5 kgs / 25.3 lbs
Gross :	16 kgs / 35.2 lbs

• Dimensions (single console)

Product :	441.6 x 460 x 44 mm / 17.4 x 18.1 x 1.73 inch
Packing :	590 x 808 x 140 mm / 23.2 x 31.8 x 5.5 inch

Console Cable

CX-6

- 6 feet DVI-D console cable (bundle)
- DVI-D + USB, server end
- DVI-D + DB15 (USB KB & MS), console port



or

CB-6


- 6 feet VGA console cable (alternative)
- VGA + USB, server end
- DB15 (VGA, USB KB & MS), console port

Keyboard

Ge G keyboard integrated with touchpad

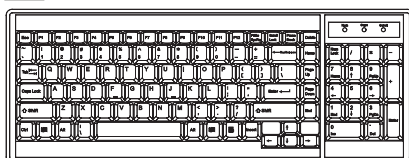

Gb G keyboard integrated with trackball

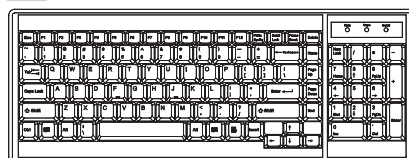

Supporting layouts

America					
	United States				
EMEA					
	United Kingdom	Germany	France	Spain	Norway
					
	Italy	Russia	Switzerland	Netherlands	Portugal
Asia					
	China	Japan	Korea	Arabia	Turkey

1U 19" Widescreen LCD KVM Drawer



• Dimensions (with KVM)

Product : 441.6 x 580 x 44 mm / 17.4 x 22.8 x 1.73 inch

Packing : 590 x 808 x 140 mm / 23.2 x 31.8 x 5.5 inch

• Weight

Net : 12.5 kgs / 28 lbs

Gross : 18.1 kgs / 39.8 lbs

• Power Consumption with KVM integration :

Screen on : Max. 55W

Power saving mode : Max. 34W

• Casing Color : Black (RAL 9005)

* For details, please refer to our KVM rear kit user manuals.

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MUKVM-KIT.pdf

Matrix Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	-	W119 - MUIP1613	W119 - MUIP3213
	1	1	2	-	W119 - MUIP1624	W119 - MUIP3224
	1	1	0	-	W119 - MU1602	W119 - MU3202
	1	2	0	-	W119 - MU1603	W119 - MU3203
	1	3	0	-	W119 - MU1604	W119 - MU3204

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-UKVM-KIT.pdf

Combo Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	W119 - UIP802	W119 - UIP1602	W119 - UIP3202
	1	1	0	W119 - U802	W119 - U1602	W119 - U3202
	1	0	0	W119 - U801	W119 - U1601	W119 - U3201

Cat6 KVM Dongle : DG-100S (VGA-USB) / DG-100 (VGA-PS/2) / DG-100SD (DVI-USB)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM-KIT.pdf

Matrix DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	W119 - MIP813	W119 - MIP1613	-
	1	1	2	W119 - MIP824	W119 - MIP1624	-
	1	1	0	W119 - M802	W119 - M1602	-
	1	2	0	W119 - M803	W119 - M1603	-
	1	3	0	W119 - M804	W119 - M1604	-

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM-KIT.pdf

Combo DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	W119 - IP802	W119 - IP1602	-
	1	1	0	W119 - 802	W119 - 1602	-
	1	0	0	W119 - S801	W119 - S1601	-

Combo DB-15 KVM Cable : CE-6 / 10 / 15 (6, 10 or 15 ft)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVIKVM-KIT.pdf

DVI-D KVM	Local	Remote	IP	12-port	-	-
	1	0	0	W119 - 1201D	-	-

DVI-D KVM Cable : CI-6 / 15 (6 or 15 ft)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-USBKVM-KIT.pdf

USB Hub DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	W119 - IP802H	W119 - IP1602H	-
	1	1	0	W119 - 802H	W119 - 1602H	-
	1	0	0	W119 - 801H	W119 - 1601H	-

USB KVM Cable : CB-6 / 10 / 15 (6, 10 or 15 ft)