



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MICROMINT USA, LLC. ANY REPRODUCTION IN PART OR WHOLE IS STRICTLY PROHIBITED WITHOUT WRITTEN PERMISSION.

PROPRIETARY


User LEDs




User Push Button



User Buzzer




Reset




Power Supply



Power Supply	JP1
J1 - Power Jack or Screw Terminal (2.0A Max)	2-4
USB Device Port (500mA Max)	1-3
USB Debug Port (500mA Max)	2-3
J-Link (300mA Max)	2-3

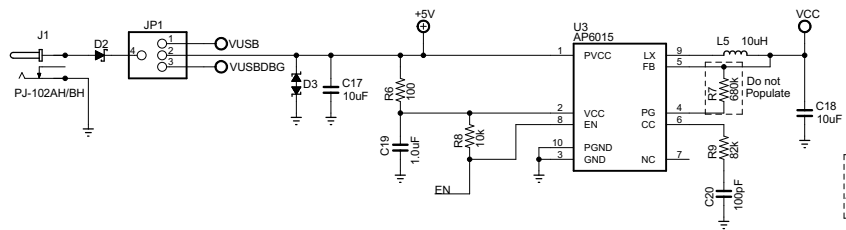

Processor

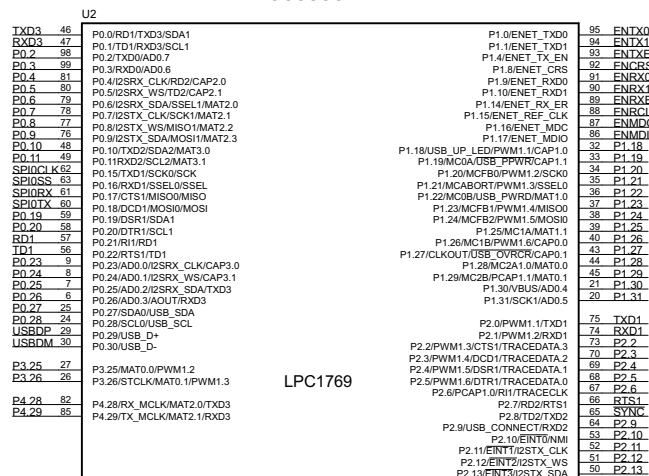


PROPRIETARY



ISSUE	MACINTOSH LLC		THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		© 2009
DRAWN PJC	TITLE Ethernet, USB				REV 1
CHECKED PJC	DATE 10/5/2010 9:33:18 AM			DRG N° LIN060-A	
DATE 12/15/09	FILE: LIN060-A			PAGE: 3/4	

PROPRIETARY

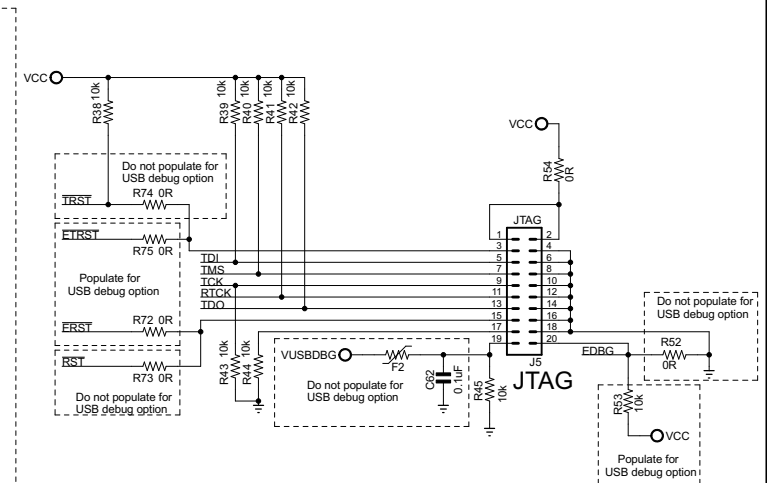

Default Jumper Settings			
Populated With	Jumper	Position	Function Selected
All Boards	JP1	2-4	Power through connector J1
All Boards	JP2	1-3 & 2-4	
USB Debug Port	JP3	1-2	
USB Debug Port	JP4	1-2	
I/O Plus RS485	JP5	Off	
I/O Plus CAN	JP6	Off	