

PIEZORESISTIVE OEM PRESSURE TRANSMITTERS

WITH I²C INTERFACE AND EMBEDDED SIGNAL CONDITIONING

With the D-line, Keller introduces a unique combination consisting of an exceedingly robust industrial pressure transducer and the popular I²C microcontroller interface. Pressure transmitters with this interface are commonly available only in consumer market housings made of plastic or ceramic, where merely the parameters for compensation are stored in an integrated memory. The D-line OEM transmitters however have an unprecedented embedded digital signal processing (DSP) core for the compensation and normalization of the output values.

Technology

The Series 4 LD...9 LD is based on KELLER's famous Chip-In-Oil (CIO) technology. The "L" stands for the laser welded stainless steel housing and could equally be representative for low-power (typ. 0,1 μ A in idle/sleep mode) and low-voltage (Supply: 1,8...3,6 VDC). The housing is hermetically-sealed, oil-filled and builds a Faraday cage with feed-through capacitors around the entire electronics. The digital interface of the electronics with dual information of pressure and temperature is indicated by the "D".

Interfaces

The easiest way to couple an OEM pressure transmitter to a microcontroller based system is a digital I/O-compatible interface; no amplification, no analog to digital conversion, no calibration, no temperature coefficients. In short: no problems.

I²C (Inter-Integrated Circuit) is designed for a direct connection between devices on a printed circuit board. It is a BUS-system because it allows the connection of multiple transmitters (slaves) to the same communication lines, but it is not a fieldbus with the classic long distance inter-connectability. So the D-Line combines an industrial pressure interface for harsh environment with an electrical interface for OEM applications.


The values are in 16 Bit unsigned integer format and the scaling is given by constants or by the memory content of the transmitter (two floating point values IEEE 754 for the pressure scaling).

Performance features

- Ultra low power consumption, optimised for battery powered applications
- Hermetically protected sensor electronics – extremely resistant to environmental influences
- Ultra-compact, robust housing made from stainless steel (optional Hastelloy C-276)
- No external electronics for compensation or signal processing
- Extremely accurate, outstanding long-term stability, no hysteresis
- Pressure ranges of 1 bar to 1000 bar
- Easy to integrate into microcontroller based systems
- Internal two-chip solution with pressure sensor and signal processing separation provides a high degree of flexibility



I²C is a trademark of NXP

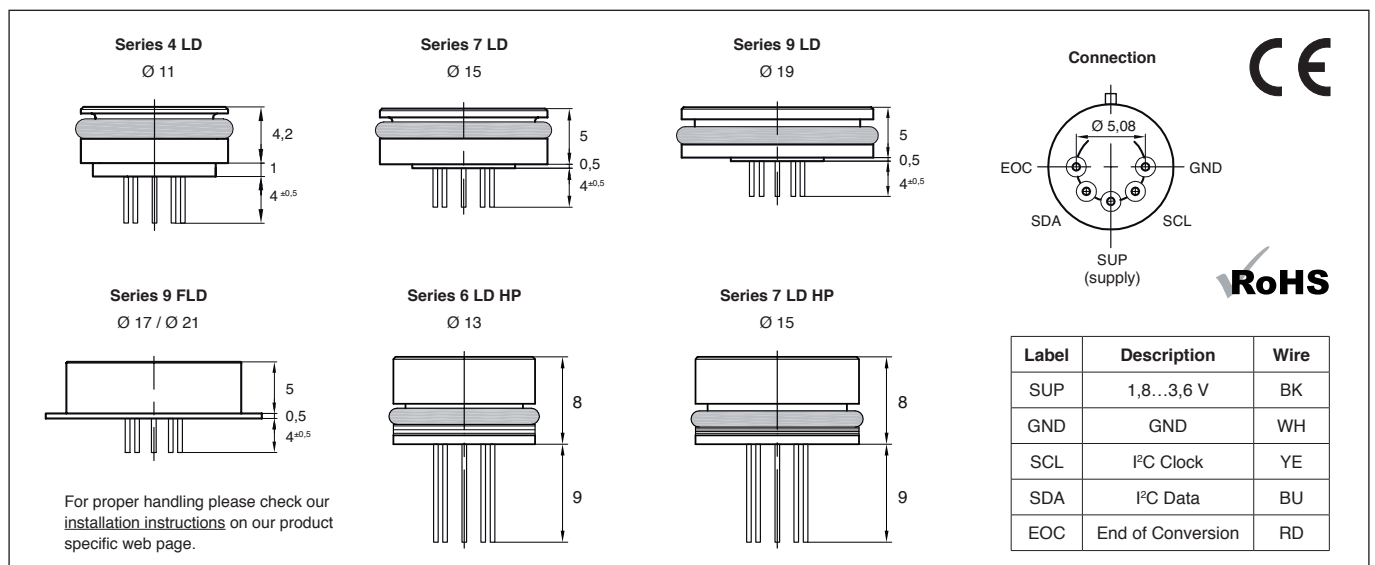

Subject to alterations

04/2014

KELLER AG für Druckmesstechnik
KELLER Ges. für Druckmesstechnik mbH

St. Gallerstrasse 119
Schwarzwaldstrasse 17

CH-8404 Winterthur
D-79798 Jestetten

Tel. +41 (0)52 - 235 25 25
Tel. +49 (0)7745 - 9214 - 0

Fax +41 (0)52 - 235 25 00
Fax +49 (0)7745 - 9214 - 60



KELLER

Specifications

Pressure Ranges rel. PR	0...1	-0,5...0,5	-1...3	-1...10	-1...30							bar
----------------------------	-------	------------	--------	---------	---------	--	--	--	--	--	--	-----

Pressure Ranges abs. PA			0...3	0...10	0...30	0...100	0...200	0...400	0...600	0...1000		bar
PAA	0...1	0,5...1,5	0...3	0...10								bar

Accuracy	max. $\pm 0,15$ %FS (Linearity best straight line@RT, hysteresis, repeatability)
Overpressure	4 x pressure range (max. 350 bar resp. 1200 bar for 6 LD HP, 7 LD HP)
Stability	typ. $\pm 0,1$ %FS, max. $\pm 0,2$ %FS (limited to max. ± 3 mbar)

Type/ Version	Dimensions [mm] ⁽⁴⁾	Pressure Range	Operating Temperature	Comp. Temp. Range	TEB ⁽¹⁾ [%FS]
4 LD	$\varnothing 11 \times 4,2$	3...200 bar abs. ⁽²⁾	-10...+80 °C	0...50 °C	$\pm 0,7$ %FS
7 LD	$\varnothing 15 \times 5$	3...200 bar abs. 3...30 bar rel. ⁽³⁾	-40...+110 °C	0...50 °C -10...80 °C	$\pm 0,5$ %FS $\pm 0,7$ %FS
9 LD	$\varnothing 19 \times 5$	1...200 bar abs. 1...30 bar rel.	-40...+110 °C	0...50 °C	$\pm 0,5$ %FS
9 FLD	$\varnothing 17 \times 5,5$ Flange $\varnothing 21$	1...30 bar abs. 1...30 bar rel.		-10...80 °C	$\pm 0,7$ %FS
6 LD HP	$\varnothing 13 \times 8$	400...1000 bar abs.	-40...+110 °C	0...50 °C	$\pm 0,7$ %FS
7 LD HP	$\varnothing 15 \times 8$			-10...80 °C	$\pm 1,0$ %FS

- (1) TEB (Total Error Band): Maximum deviation within specified pressure and operating temperature range
(2) abs: Absolute Pressure Measurement (PAA: Absolute. Zero at vacuum PA: Sealed Gauge. Zero at 1,0 bar abs.)
(3) rel: Referential version (PR: Vented Gauge. Zero at atmospheric pressure)
(4) Dimensions without glass feed through

Interface	digital I ² C (serial synchronus)
Signal Output	P [bar], T [°C]: normalised to 16 Bit unsigned integer
Signal Reserve	typ. ± 10 %FS, min. ± 5 %FS
Supply	1,8...3,6 V
Power Consumption	typ. 1,5 mA during conversion typ. 100 nA in idle mode
Bit Rate	$\leq 3,4$ MHz
Start-up Time (Supply ON)	< 3 ms
Conversion Time	< 6 ms (for P and T)
Noise Floor	max. $\pm 0,015$ %FS (temperature 4 Bit)
Temperature Accuracy	typ. ± 2 °C
Supply Voltage Dependency	none
Isolation	> 100 M Ω @ 500 VDC
ESD – Human Body Model	> 4 kV (HBM: C = 100 pF / R = 1,5 k Ω)
Material in Contact with Media	- Stainless Steel AISI 316L (DIN 1.4404 / 1.4435) - O-Ring: Viton® Shore A (exchangeable)
Oil Filling	Silicone oil, others on request
Pressure Endurance	0...100 %FS @ 25 °C: > 10 million pressure cycles with appropriate installation
Vibration Endurance	20 g, 5...2000 Hz, X/Y/Z-Achse
Shock	75 g sine 11 ms
Electrical Connection	- Glass feed through pins $\varnothing 0,45$ mm, L = $4 \pm 0,5$ mm - Plug JST 1 mm, 5-pole. Type: BM05B-SRSS-TB. Only for -20...85 °C and not for 4 LD & 6 LD As counterpart: Crimp-socket with wires AWG 28. Type: SHR-05V-S-(B), Crimp-contact: SSH-003T-P0.2
Options	- Electrical connection: 7 cm silicone wires 0,09 mm ² on the glass feed through pins - Hastelloy housing (dep. on version also Inconel, Titanium) - Extended temperature range within -40...+110 °C
Other possible versions	- Series 9 LD: With pressure range 300 mbar - Series 20 D: With pressure connection G1/4", G1/8" etc. - Series 21 D: With screened cable (0,5 to 3 m)
Remarks	- Intermediate press. ranges only for high-volume projects - Series 21 D is not available with plug (I ² C is not a fieldbus)

Communication Protocol

D-Line OEM-transmitter samples only on request.
The idle state is the sleep mode to save power.


Sequence for data acquisition:

1. Request measurement
2 bytes from master

ADDR	0	0xAC
------	---	------
2. Await the end of conversion (three ways)
 - Simple delay of 6 ms
 - Polling of the "Busy?" flag [5] in the status byte (only one byte reading needed)
 - Event triggering by the additional "EOC" handshake pin (goes to VDD)
3. Read out measurement results
1 byte from master, 3...5 bytes from slave

ADDR	1	STATUS	P MSB	P LSB	...
			T MSB	T LSB	
4. Interpretation of new data
 $P [\text{bar}] = P \text{ min} \dots P \text{ max} \approx 16384 \dots 49152$
 $T [^\circ\text{C}] = -50 \dots 150 \text{ } ^\circ\text{C} \approx 384 \dots 64384$

The complete communication protocol can be provided upon request.

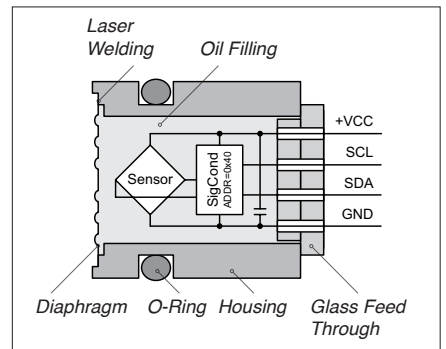

Plug JST
with Series 7 LD

