

Radios
communication without barriers

MBRK-DIN-N FreeWave Ruggedized Radio Din Rail Mount Instructions

Parts list:

Your kit includes the following:-

Qty	Description
1	Din rail mount for enclosure
2	Screw #6-32 x 1/4" truss head

Radio fitting instructions


Slide the din rail mount over the rear of the ruggedised enclosure, ensuring the din rail mount is correctly orientated so the cut outs for the feet match up with the feet on the radio.

Making sure the holes of the din rail mount align with those on the radio, secure the radio to the din rail mount using the 2 truss head screws provided.

Din rail mounting instructions

To fit the assembly to a din rail, first snap the assembly fixed grip onto one of the rails and press the assembly into place. A clear "click" will be heard when the unit is secure.

Note: it is not necessary to use the release catch when fitting the unit.

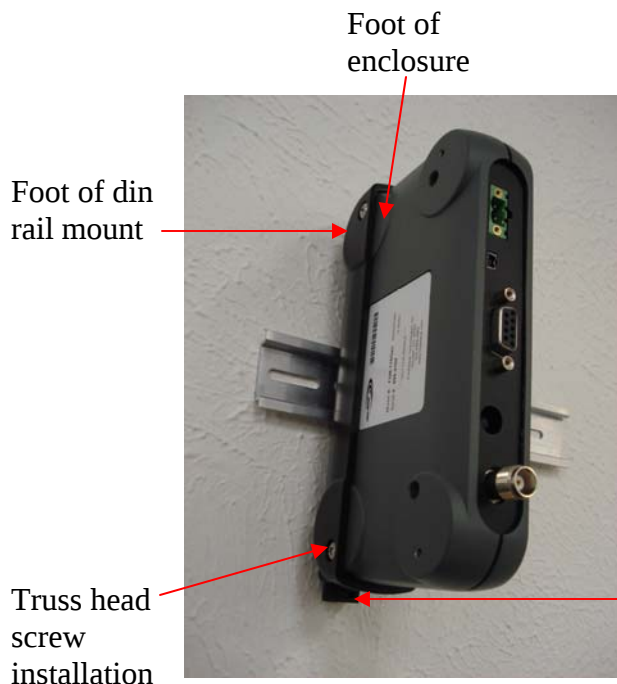

Din rail removal instructions

To remove the assembly from the din rail, insert a small screwdriver into the leverage point on the end of the release catch and push down lightly approx ¼ of an inch. The clamp will release and the assembly can be lifted off.

Radio orientation

The din rail mount has been designed to allow the radio to be fitted with either the LEDs facing the left or the right. The only difference is the location of the release catch – either at the top or at the bottom