


FEATURES

- Ultra Low ESR < 30 mΩ
- New E/7260 Case with ESR < 18 mΩ
- Up to 4 Amps ripple current
- 100% accelerated steady-state aging
- 100% Surge current test
- Precision - molded, laser-marked case
- Symmetrical compliant terminations
- Taped and reeled per EIA 481-1

OUTLINE DRAWING

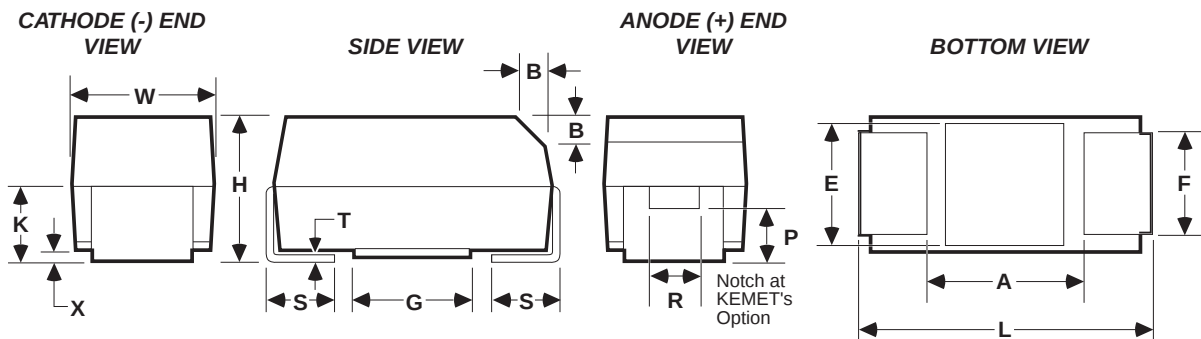

DIMENSIONS - Millimeters (Inches)

CASE SIZE		COMPONENT													
KEMET	EIA	L	W	H	K ± 0.20 (.008)	F ± 0.1 (.004)	S ± 0.3 (.012)	B ± 0.15 (Ref) $\pm (.006)$	X (Ref)	P (Ref)	R (Ref)	T (Ref)	A (Min)	G (Ref)	E (Ref)
X	7343-43	7.3 ± 0.3 (.287 $\pm .012$)	4.3 ± 0.3 (.169 $\pm .012$)	4.0 ± 0.3 (.157 $\pm .012$)	2.3 (.091)	2.4 (.094)	1.3 (.051)	0.5 (.020)	0.10 ± 0.10 (.004 $\pm .004$)	0.9 (.035)	1.0 (.039)	0.13 (.005)	3.8 (.150)	3.5 (.138)	3.5 (.138)
E	7260-38	7.3 ± 0.3 (.287 $\pm .012$)	6.0 ± 0.3 (.236 $\pm .012$)	3.6 ± 0.2 (.142 $\pm .008$)	2.3 (.091)	4.1 (.161)	1.3 (.051)	0.5 (.020)	0.10 ± 0.10 (.004 $\pm .004$)	0.9 (.035)	1.0 (.039)	0.13 (.005)	3.8 (.150)	3.5 (.138)	3.5 (.138)


Notes: Metric Dimensions govern
(Ref) - Dimensions provided for reference only.

T510 RATINGS & PART NUMBER REFERENCE


Cap. μF	Case Size	KEMET Part Number	DC Leakage μA @ 25°C Max	DF % @ 25°C 120Hz Max	ESR mΩ @ 25°C 100 kHz Max	Ripple Current A rms @ 25°C 100 kHz, max		
						25°C	85°C	125°C
4 Volt Rating at +85°C (2.7 Volt Rating at 125°C)								
680	X	T510X687(1)004AS	27.2	6.0	30	3.0	2.7	1.2
1,000	E	T510E108(1)004AS	40.0	6.0	18	4.0	3.6	1.6
1,000	E	T510E108(1)004AS4115	40.0	6.0	10	5.3	4.8	2.1
6/6.3 Volt Rating at +85°C (4 Volt Rating at 125°C)								
470	X	T510X477(1)006AS	28.2	6.0	30	3.0	2.7	1.2
680	E	T510E687(1)006AS	40.8	6.0	23	3.5	3.2	1.4
680	E	T510E687(1)006AS4115	40.8	6.0	12	4.8	4.3	1.9
10 Volt Rating at +85°C (7 Volt Rating at 125°C)								
330	X	T510X337(1)010AS	33.0	6.0	35	2.8	2.5	1.1

(1) To complete the KEMET part number, insert "K" - $\pm 10\%$ or "M" - $\pm 20\%$ capacitance tolerance.


T510 ORDERING INFORMATION

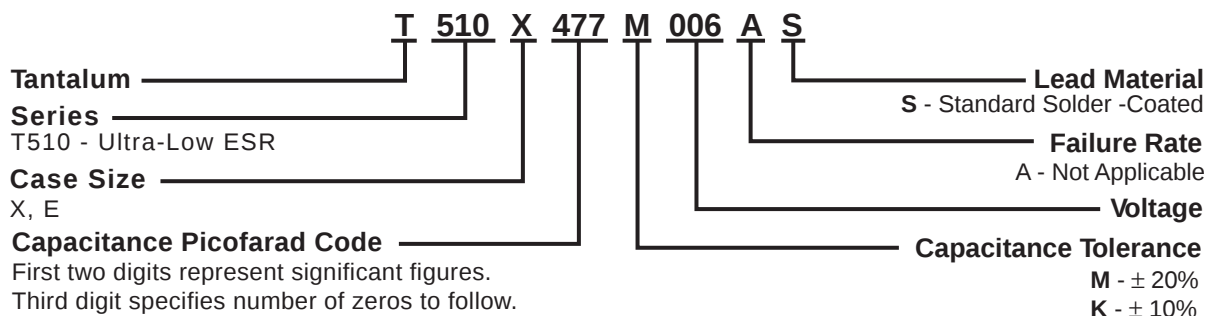


TYPICAL CAP FREQUENCY SCAN @25°C
T510X477M006AS

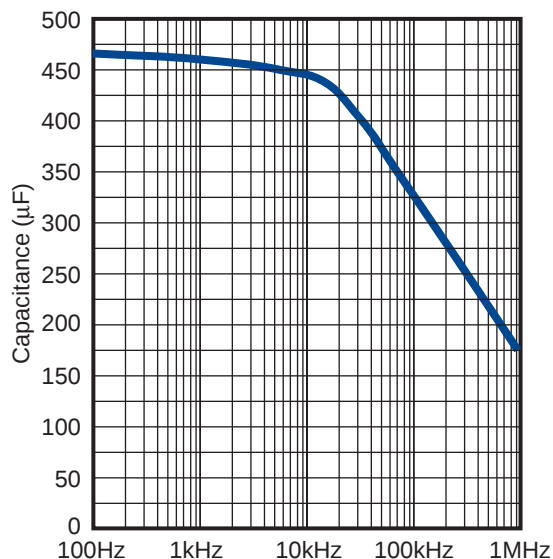

TYPICAL ESR/Z FREQUENCY SCAN @25°C
T510X477M006AS

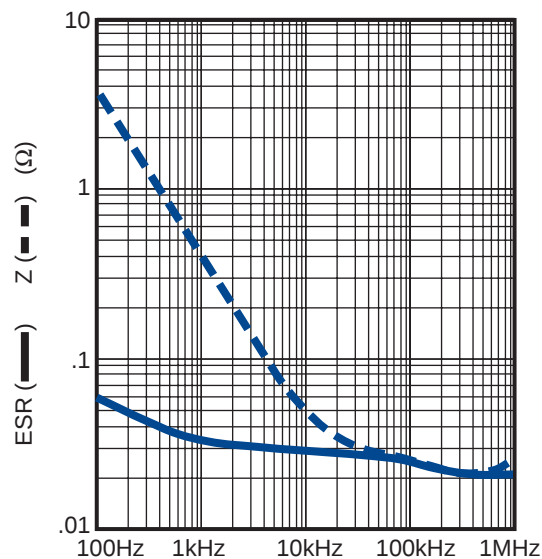


CAPACITOR MARKINGS

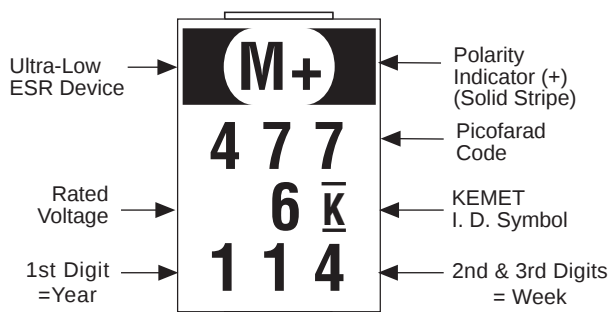


"114" = The 14th week of 2001.


T510 SERIES CONSTRUCTION

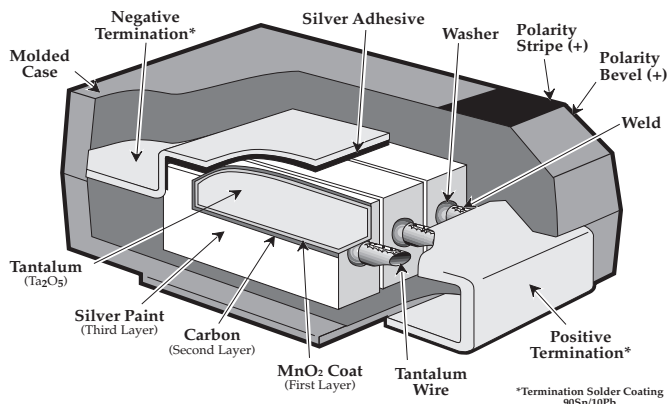


TYPICAL CAP FREQUENCY SCAN @ 25°C
T510E108M004AS

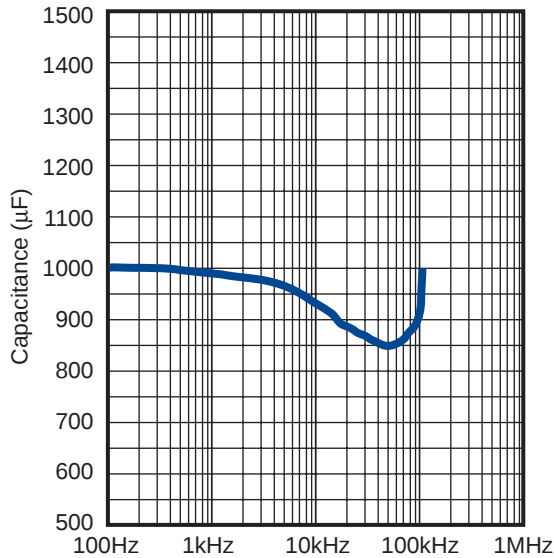

TYPICAL ESR/Z FREQUENCY SCAN @ 25°C
T510E108M004AS

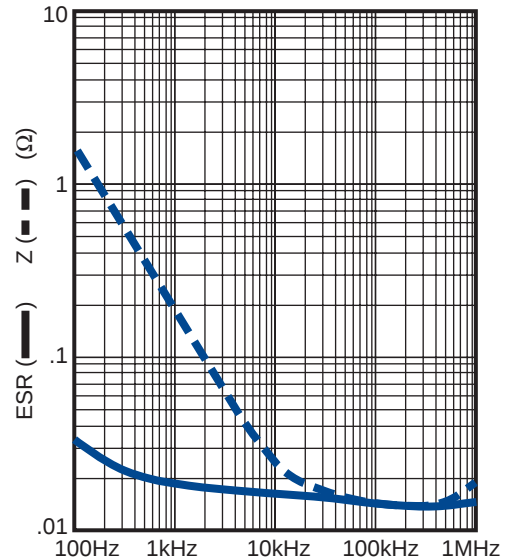

CAPACITOR MARKINGS

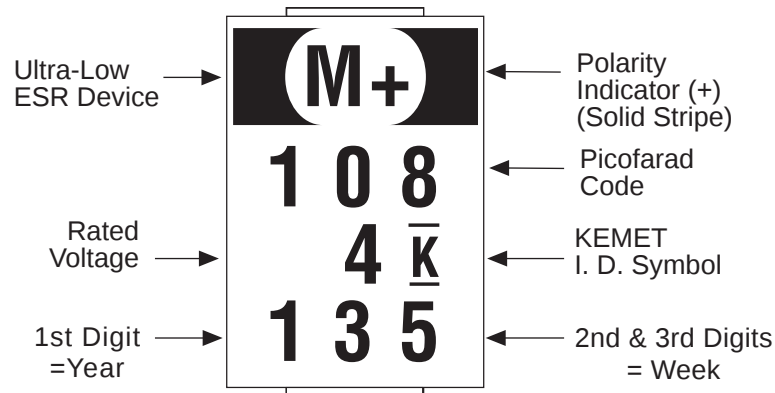

"135" = The 35th week of 2001.

T510E SERIES CONSTRUCTION

