




Order Code	TCK-048
Inductance (each winding)	450 μ H $\pm$ 35% (at 100 kHz / 100 mV)
Impedance (DCR)	25 mOhm max.
Rated Current	5.2 A max.
Rated Voltage	500 VDC max. (between windings)
Operating Temperature	-40°C to +125°C



Impedance Curve

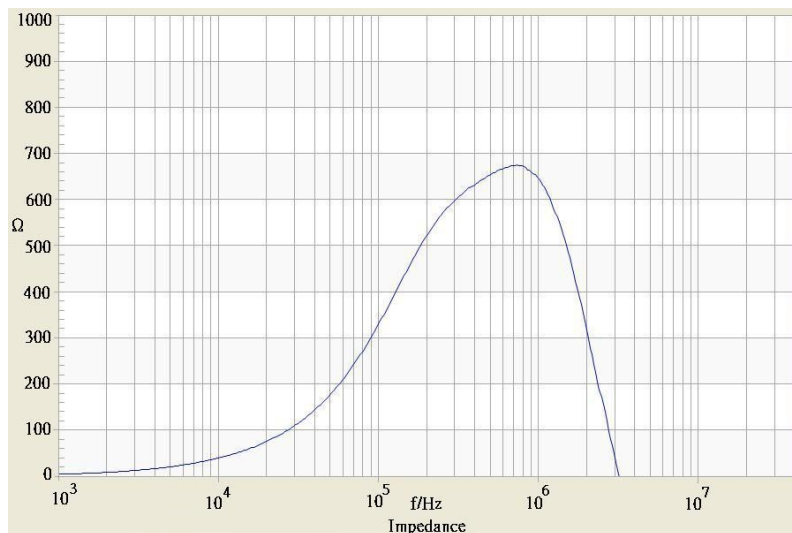

Outline Dimensions

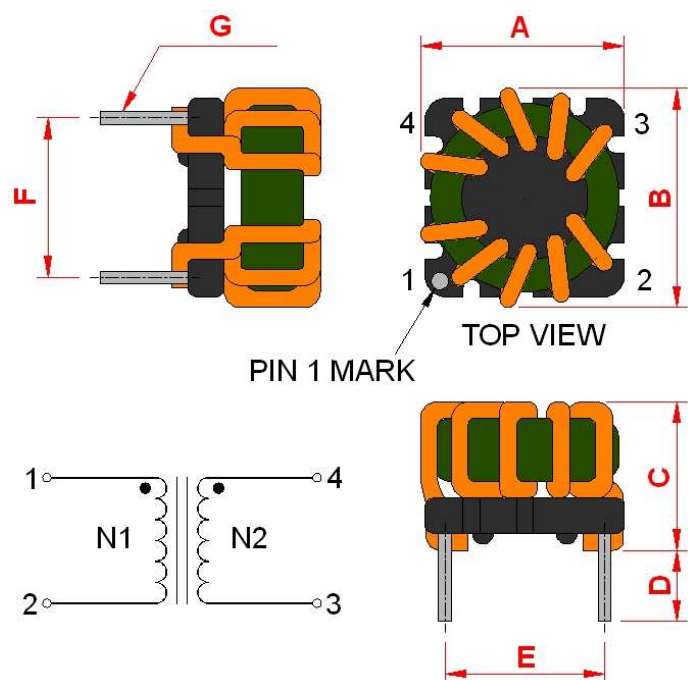

Dimensions [mm]

A	11.5 max.
B	11.5 max.
C	9.8 max.
D	2.5 min.
E	7.62 $\pm$ 0.2
F	7.62 $\pm$ 0.2
G	$\varnothing$ 0.6 $\pm$ 0.1