

SeaShield Marine Systems



Fab-Form Pile Jacket

Nylon fabric jacket to provide a form
for encasement of concrete

SeaShield Fab-Form is a nylon fabric form jacket that provides a quick and economical solution to repair deteriorated pilings. The Fab-Form jacket is designed for concrete encasement to strengthen and extend the life span of timber, concrete and steel piles.

Features

- Non-corrosive
- Minimum labor cost
- Lightweight
- Quick and economical solution to repair deteriorated piles
- Extends life span of pile
- Easy to apply concrete encasement jacket
- Zipper closure system
- Long maintenance-free service life




DENSO NORTH AMERICA INC.



Materials

The SeaShield Fab-Form Jackets are available in two types – Fab-Form I (nylon fabric) and Fab-Form II (nylon ballistic). The Fab-Form I is standard high strength synthetic nylon woven to create a water permeable fabric that serves as both a filter and a form. The Fab-Form II is a ballistic material that is impermeable and prevents weeping and loss of concrete fill into the surrounding environment.

The Fab-Form Jackets can be manufactured in 1' to 50' long sections. The jackets are provided with a zipper closure system, constructed of brass teeth on nylon cotton tape. All seams are folded and double needle stitched.

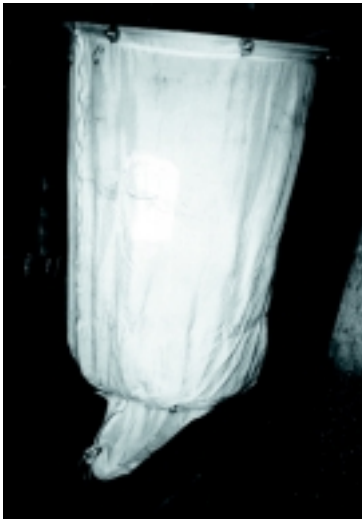


The concrete grout shall be specified by the owner or engineer.

The concrete grout shall be specified by the owner or engineer.

For further details please refer to the technical data sheet for SeaShield Fab-Form.

Application

1. Thoroughly clean the existing pile by waterblasting or other acceptable methods. All loosely adhered surface contamination such as rust scale, spalled concrete and marine organisms shall be removed.
2. Install steel or other reinforcement to the pile as required by project specifications. All ends of reinforcing steel shall be turned toward the pile to avoid damage to the fabric jacket.
3. If required, spacers shall be installed to maintain adequate mortar coverage over reinforcing. All spacers shall be non-metallic.
4. Position the Fab-Form around the pile and secure with strapping to the pile or to suitable supporting and/or spacing members. The zipper shall then be closed by sliding from top down.
5. Fill the Fab-Form Jacket with a cementitious fill at a constant rate of placement through the port holes with hose extending down to the lowest point of the jacket. Concrete should not be allowed to fall freely through water or air and should be injected in such a manner as to assure uniformly sound and undiluted concrete in the pile jacket. Fill should not drop from top to bottom of the jacket which could result in a separation of the cement. **NOTE: Fill should include a superplastizer, small rock pump mix and a slump of 8" to 10".**

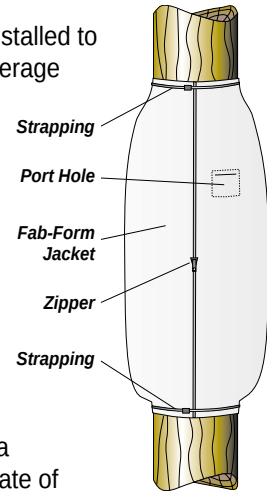

Find Out More

Contact Denso North America Inc. for a complete literature package or a no-cost on-site evaluation of your application:

1-888-821-2300



DENSO NORTH AMERICA INC.

HOUSTON:
18211 Chisholm Trail,
Houston, Texas,
U.S.A. 77060
Tel: 281-821-3355
Fax: 281-821-0304

TORONTO:
90 Ironside Crescent,
Unit 12, Toronto,
Ontario, Canada M1X1M3
Tel: 416-291-3435
Fax: 416-291-0898

e-mail: info@densona.com

www.densona.com

A Member of Winn & Coales International