


13 SOCKET
Subconn
DBH13FNM

1	BLK# 0.5mm2	24 VDC Rtn
2	Blue #24	Signal Rtn
3	WHT/Blue #24	PPS
4	BRN#24	GIGE N/C
5	WHT/BRN#24	GIGE N/C
6	BLU#24	GIGE N/C
7	WHT/BLU#24	GIGE N/C
8	ORG#24	GIGE
9	WHT/ORG#24	GIGE
10	GRN#24	GIGE
11	WHT/GRN#24	GIGE
12	White 0.5mm2	+24 VDC
13	White/Brown #24	Trigger Out to DVL

Tx+ 1
Tx- 2
Rx+ 3
Rx- 4
Trigger Out 5
N/C 6
PPS In 7
Signal Ground 8
PWR RTN 9
+ 24 VDC 10

WBMS Right Angle

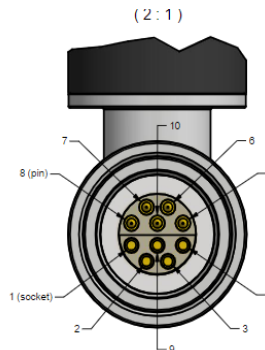

WBMS_Interface_Pigtail_Angled		
Pin	Description	Cable, Color
1	TX +	24 AWG, white/orange
2	TX -	24 AWG, orange
3	RX +	24 AWG, white/green
4	RX -	24 AWG, green
5	RS232 Tx/Trig Out	24 AWG, white/brown
6	RS232 Tx/Trig In	24 AWG, brown
7	IRIG B	24 AWG, white/blue
8	Signal GND	24 AWG, blue
9	PWR GND	Black 0.5 mm2
10	PWR +24VDC	White 0.5 mm2

MONTEREY BAY AQUARIUM RESEARCH INSTITUTE
7700 SANDHOLDT ROAD
MOSS LANDING, CA 95039

PHONE (831) 775-1700 www.mbari.org

COPYRIGHT © 2016 MBARI

MAY NOT BE COPIED WITHOUT PERMISSION



Title

Norbit WBMS WET CABLE

Size
A

Engineer: **Hobson**
EMAIL: chma@mbari.org (831) 775-1708
Date: **Wednesday, May 06, 2020**

Number
1002211210-18

Sheet **1** of **1**

Rev
A

(c) MBARI 2017 MBARI provides the documentation and materials "as is", with no warranty, express or implied, as to title, non-infringement of third party rights, merchantability, or fitness for any particular purpose, or the performance or results which you may obtain from their use. You assume the entire risk associated with use.