


Datasheet

Lambda Driver® Series

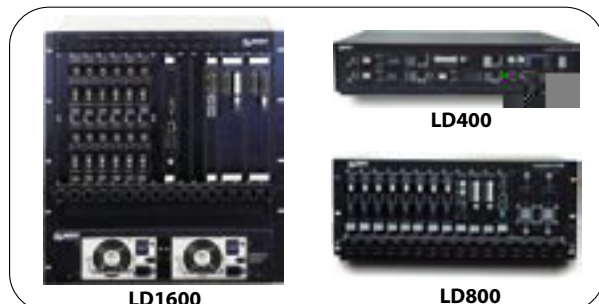

Overview

The Lambda Driver® series consists of multi-functional, compact modular Wavelength Division Multiplexing (WDM) systems that can create up to 32 independent virtual fiber optic links over a single pair of fibers over distances of up to 100 km. The Lambda Driver systems are targeted for Carriers' central offices or multi-tenant office buildings and are ideally suited for MAN networks as well as large enterprise and Access networks.

The product supports different network topologies such as PTP, Linear OADM and Ring.

The Lambda Driver family operates in a DWDM (ITU Grid channels spacing) and CWDM (20 nm channels spacing) technology. Each data stream can handle rates from 10 Mbps up to 2.5 Gbps. The systems support future upgrade to 10 Gbps services.

Chassis

LD400/LD800/1600 are 19-inch rack mountable chassis with modular architecture hosting different Mux/DeMux modules with 4, 8, 16 and 32 channels or OADM modules starting from single channel up to any number and mix of channels. Such flexibility offers a lower initial cost to service providers, allowing for fewer channels units at start, and ensuring simple system upgrades or future network re-configurations.

In order to provide maximum system reliability, the systems have a redundant power supplies option.

LD1600 is 11.5U high with 16 general slots for transponders, OADM's, Mux's and 1+1 redundancy modules and 6 general slots for 16/32 channels Mux's and 2 reserve slots for 2 management cards (redundancy).

LD800 is 4.5U high with 11 general slots for transponders, LD800 size modules (OADM's, Mux's and 1+1 redundancy modules) and 1 reserve slot for Management.

LD400 is 2U high with 5 general slots for transponders, LD800 size modules (OADM's Mux's and 1+1 redundancy modules) and 1 reserve slot for Management.

Transponders

The transponders are single slot modules that provide an interface between the WDM system and single channel access port. Transponders are fully independent of the other channels and transparently support all data centric protocols, enabling service providers to mix different protocols:

Enterprise markets:

- Fast Ethernet 125 Mbps
- Gigabit Ethernet 1.25 Mbps
- Fiber Distributed Data Interface FDDI (125 Mbps)

Carrier markets:

- SONET/SDH/ATM OC-1 to OC-48 and STM-1 to STM-16

Storage markets:

- . Fiber channel: 133 Mbps, 266 Mbps, 531 Mbps, 1.062 Gbps, 2.125 Gbps
- . FICON (IBM Proprietary): 1.0625 Gbps, FICON Express 2.125 Gbps
- . ESCON: 200 Mbps
- . ETR/CLO (IBM Proprietary): 16 Mbps

Video markets:

- . SDI "D1 video", 270 Mbps
- . DV6000 2.38 Gbps
- . HDTV 1.483/1.4835 Gbps

Features

- Metro, Access, and Campus applications
- Better fiber efficiency with simpler network design at less cost
- Multi-protocol support
- Scalable design up to 32 protected services per ring
- Data rates of up to 2.5 Gbps upgradable to 10 Gbps
- DWDM - ITU - T - G.694.1 grid 100 or 200 GHz (0.8 nm or 1.6 nm) spaced
- CWDM - ITU - T - G.694.2 20 nm spaced
- Error and configuration monitoring via SNMP or CLI
- Redundant power supply
- 1+1 link protection – optional
- O-BPSR ring protection option
- Built-in Optical Amplifier (EDFA) - optional
- Access interface flexibility by use of SFP transceivers
- Digital diagnostic from SFP interface
- Power monitoring of the WDM transceiver
- Loopback functionality for better field maintenance
- CWDM to DWDM wavelengths conversion option



LD400/LD800/1600 transponders possess the "data rate selection" functionality, allowing service providers to perform remote rate provisioning. There are two types of DWDM transponders - regular and "low dispersion". The "low dispersion" transponders allow the transmission of 2.5 Gbps over up to 400 km of SMF with the help of Optical Amplifiers, but without need for dispersion compensation. The customer (access) interface type of the transponders can be fixed, (i.e. 1310 nm MM/SM or 850 nm MM), or interchangeable (pluggable) by use of SFP (Small Form Factor Pluggable transceiver). The SFP transponders* also possess additional loopback and power monitoring functionalities as well as other SFP related information. The transponders are hot swappable, allowing scalable, in-service expansion or channel maintenance without interruption of service on other channels. The same transponder modules can be used in all Lambda Driver family chassis.

* Note: SFP transceiver is ordered separately from the transponder.

TDM Sub-rate Multiplexers

By multiplexing multiple channels via TDM into DWDM or CWDM the number of ports in a single fiber can be multiplied by a factor of TDM implementation, thus increasing the efficiency of fiber use as well as saving precious physical space.

- **EM2009-EM4/P- 4x ESCON multiplexer module:** the ultra compact design is ideally suited for ESCON applications, which often require many parallel links. A integration of the 4x ESCON Mux in the LD400/LD800/1600 chassis achieves extremely high levels of density - 128 ESCON services can be run over one fiber pair (with 32 wavelengths). The electrically based multiplexing allows for a significant cost reduction and higher fiber utilization when compared to a pure optical multiplexing solution. The ESCON Mux link fiber interface can be 850 nm/1310 nm or CWDM grid for direct connection to the CWDM Mux by use of SFP interface.

- **EM2009- GM2-2xGE multiplexer module :** electrically multiplexes 2 GE tributaries into one 2.5 Gbps aggregated trunk. This module allows for a significant cost reduction and higher fiber utilization when compared to pure optical multiplexin solutions. When combining it with CWDM/DWDM technology this module doubles the capacity compared to pure WDM solution. To optimize each port interface as needed, all ports use standard SFP (Small Form Pluggable) field installable transceivers. Please refer to EM2009-GM2 data sheet for a more detailed description.

Protection options

An optional 1+1 protection module provides survivability in case of a main fiber break in Point-to-Point configurations. When the module discovers a fiber severance in the main link, it automatically switches the WDM traffic to the secondary link within less than 25 ms.

For Ring topologies O-BPSR (Optical Bi-directional Path Switched Ring) protection is provided by use of two transponders for each channel (full hardware redundancy).

When protection switching is done within client terminal equipment (like in most SDH applications), the two transponders provide diverse routes for two client interfaces. When only one client interface is provided, the two transponders work in redundancy mode when only one transponder transmits to the client interface and the other is in "standby" mode for protection. This single client interface is connected to two transponders by Y cable which can be provided upon request.

Management

The Lambda Driver LD series are SNMP and Web manageable (with MegaVision Web®) for configuration and fault monitoring.

Local element management interface is provided for connecting to the VT100™ style text terminal (RS-232 DB9 connector) or 10/100 Mbps (RJ45 Ethernet connector). A 100BaseFX port is provided for remote fiber access to the element manager. LD1600 has an option for a redundant Management module.

Remote login via TELNET is also supported.

Optical Supervisory Channel (OSC) which runs together with the WDM data over the same fibers is optional. This option is included in the 1+1 redundancy module or special SRV module. The SRV module combines the WDM traffic with 1310 nm Management stream and can be used also for other traffic combinations (like STMn 1310 nm).

WDM Link distances

The link budget of the product allows distances up to 100 km with regular SM fibers (0.25 dB/km or better). For fiber spans with large attenuation, integrated Optical Amplifier (EDFA) modules can be used. 3 different types are supported:

- Booster - for amplification of the signal at the starting point of the link
- In-Line - for amplification of the signal at the middle point of the link
- Pre-Amp - for amplification of the signal at the end point of the link

The link distance limitation of 100 km for standard products, even with Optical Amplifiers, is due to the dispersion. This limit can be eliminated by using a DCU (dispersion compensation unit) along the link or transponders with low dispersion feature.

Regular CWDM or DWDM transponders can tolerate dispersion up to 1600 ps/nm for 2.5 Gbps data rates at 10^{-12} BER. The low dispersion transponders (TM-DL4SFP) can tolerate up to 6,500 ps/nm and the extra low dispersion transponders (TM-DL6SFP) can tolerate up to 12,800 ps/nm.

LD1600 DWDM Mux/DeMux modules	
EM1600-MUX32	32 100G spacing wavelengths DWDM Multiplexer module for LD1600
EM1600-DMUX32	32 100G spacing wavelengths DWDM Demultiplexer module for LD1600
EM1600-MUX16	16 wavelengths DWDM Multiplexer module for LD1600
EM1600-DMUX16	16 wavelengths DWDM Demultiplexer module for LD1600
EM1600-MUX16R	16 100G spacing Red band DWDM Multiplexer module for LD1600
EM1600-DMUX16R	16 100G spacing Red band DWDM Demultiplexer module for LD1600
EM1600-MUX16B	16 100G spacing Blue band DWDM Multiplexer with band splitter module for LD1600
EM1600-DMUX16B	16 100G spacing Blue band DWDM Demultiplexer with band splitter module for LD1600
EM1600-MUX8R	8 wavelengths DWDM Multiplexer module for LD1600 (ch#21 to ch#35)
EM1600-DMUX8R	8 wavelengths DWDM Demultiplexer module for LD1600 (ch#21 to ch#35)
EM1600-MUX8B	8 wavelengths DWDM Multiplexer module for LD1600 (ch#45 to ch#59) with band splitter
EM1600-DMUX8B	8 wavelengths DWDM Demultiplexer module for LD1600 (ch#45 to ch#59) with band splitter
LD800 DWDM Mux/DeMux modules	
EM800-MUX8B	8 wavelengths (#45 - #59) DWDM Multiplexer module for LD800
EM800-DMUX8B	8 wavelengths (#45 - #59) DWDM Demultiplexer module for LD800
EM800-MUX8R	8 wavelengths (#21 - #35) DWDM Multiplexer module for LD800
EM800-DMUX8R	8 wavelengths (#21 - #35) DWDM Demultiplexer module for LD800
LD800 CWDM Mux/DeMux modules	
EM800-MUX8/CW	8 wavelengths CWDM Multiplexer module for LD800
EM800-DMUX8/CW	8 wavelengths CWDM Demultiplexer module for LD800
Single fiber DWDM OADM modules	
ADDxx/yy/zz/ww*	4 wavelengths DWDM OADM module
ADDxx/yy/zz*	3 wavelengths DWDM OADM module
ADDxx/yy*	2 wavelengths DWDM OADM module
ADDxx*	1 wavelength DWDM OADM module
Dual fiber DWDM OADM modules	
ADDDxx/yy/zz/ww*	4 wavelengths DWDM OADM module for LD800
ADDDxx/yy/zz*	3 wavelengths DWDM OADM module for LD800
ADDDxx/yy*	2 wavelengths DWDM OADM module for LD800
ADDDxx*	1 wavelength DWDM OADM module for LD800
Single fiber CWDM OADM modules	
ADCxx/yy/zz/ww*	4 wavelengths CWDM OADM module for LD800
ADCxx/yy/zz*	3 wavelengths CWDM OADM module for LD800
ADCxx/yy*	2 wavelengths CWDM OADM module for LD800
ADCxx*	1 wavelength CWDM OADM module for LD800
Dual fiber CWDM OADM modules	
ADCDxx/yy/zz/ww*	4 wavelengths CWDM OADM module for LD800
ADCDxx/yy/zz*	3 wavelengths CWDM OADM module for LD800
ADCDxx/yy*	2 wavelengths CWDM OADM module for LD800
ADCDxx*	1 wavelength CWDM OADM module for LD800
SFP Access port Transponder Modules	
TM-CSFP/xx*	SFP Access port, any rate (up to 2.5Gbps) CWDM ch #xx transponder
TM-DSFP/xx	SFP Access port, any rate (up to 2.5Gbps) DWDM ch #xx transponder
TM-DL4SFP/xx	SFP Access port, any rate (up to 2.5Gbps) DWDM ch #xx transponder with low dispersion up to 360 km
TM-DL6SFP/xx	SFP Access port, any rate (up to 2.5Gbps) DWDM ch #xx transponder with extra low dispersion up to 640 km
TDM modules	
EM2009-EM4/P	4 ESCON ports (1310nm MM) TDM Multiplexer channel card with SFP trunk interface.
EM2009-GM2	2 GE ports TDM Multiplexer channel card with SFP receptacles
Accessories	
CA-SMD-SC/SC-5	Duplex F/O cable SC-SC, 5m, SM
CA-SMS-SC/SC-1	F/O cable SC-SC 1m, SM
CA-SMS-MU/MU-06	F/O cable MU-MU 65 cm, SM
CA-MMS-MU/MU-06	F/O cable MU-MU 65 cm, MM 62.5/125m,
CA-SMS-MU/PC-1	F/O cable MU-FC/PC 1m, SM
CA-SMS-SC/MU-06	F/O cable SC-MU 65 cm, SM
CA-SMS-SC/MU-5	F/O cable SC-MU 5 m, SM
CA-SMS-LC/MU-06	F/O cable LC-MU 65 cm, SM
CA-SMS-LC/MU-5	F/O cable LC-MU 5 m, SM
CA-SMS-LC/LC-06	F/O cable LC-LC 65 cm, SM
CA-SMS-LC/SC-5	F/O cable LC-SC 5 m, SM