


VIA EPIA



- Mini-ITX form factor 170mm x 170mm
- VIA C3 800MHz E-Series processor
- VIA Apollo PLE 133 (VT8601A North Bridge and VT8231 South Bridge)
- TV-out
- VIA 10/100 Ethernet LAN onboard
- Integrated AGP2X with 2D/3D Graphics Acceleration
- VIA VT1612A AC'97 onboard
- 1 PCI slots
- ATA/100/66/33 Support
- 4 USB ports, 1 LPT port, 1 serial port
- ATX Power Supply Compliant
- LinuxBIOS support coming soon

VIA EPIA-M

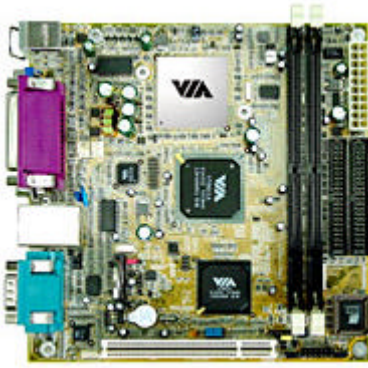

- Mini-ITX form factor 170mm x 170mm
- VIA C3 600MHz E-Series processor
- VIA Apollo CLE 266 (VT8623A North Bridge and VT8235 South Bridge)
- 1 DDR266 DIMM socket, up to 1GB memory size
- Integrated VIA Unichrome AGP graphics with MPEG-2 decoder(require special software)
- TV-out
- VIA 10/100 Ethernet LAN onboard
- Integrated AGP2X with 2D/3D Graphics Acceleration
- VIA VT1616 AC'97 onboard
- 1 PCI slots
- ATA/100/66/33 Support

- 1 FDD connector
- 2 1394 firewire ports, 4 USB ports, 1 LPT port, 1 serial port, 1 I2C
- ATX Power Supply Compliant