




2mm Hard Metric Connectors

Contents

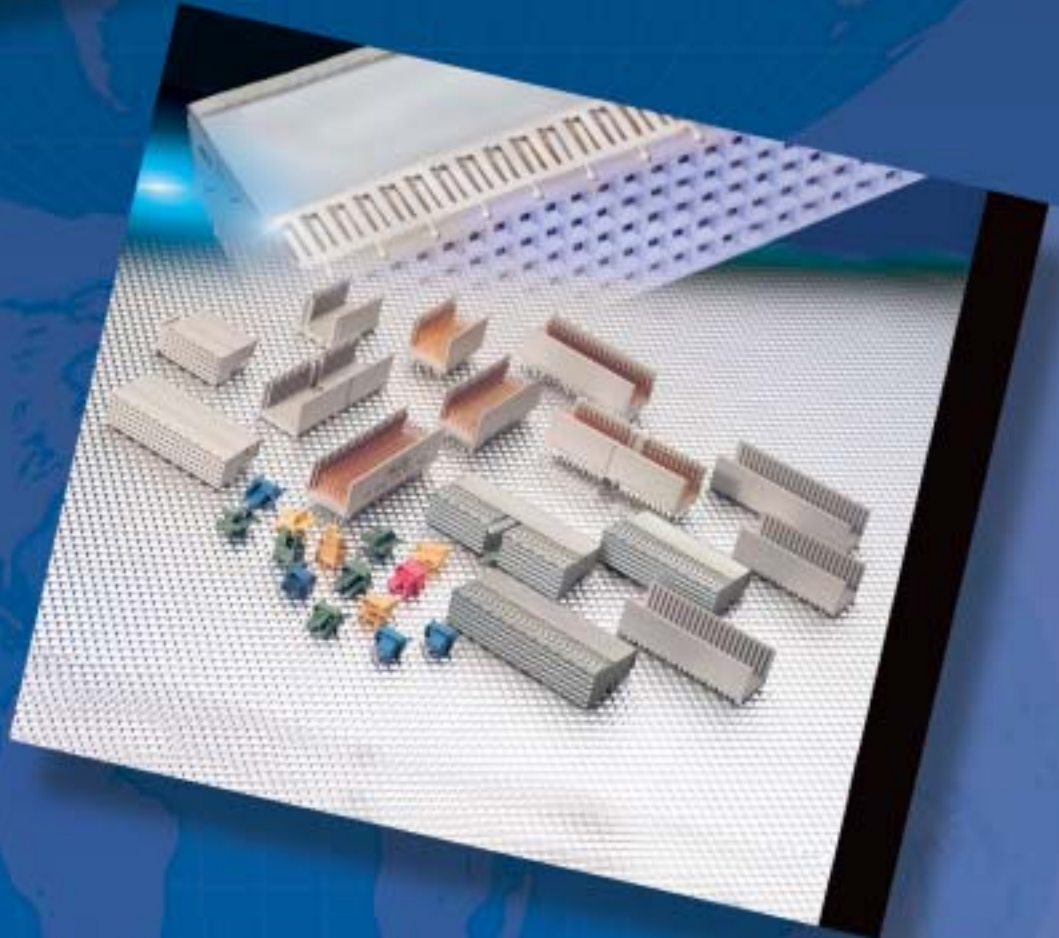

Introduction	1	Vertical Male Style B 19, 133 Contacts, Series 7200	38
Technical Specifications	2	Vertical Male Style C 11, 77 Contacts, Series 7200	40
Multi-Line Module Connectors for CompactPCI® Series 7200	3	Type D Vertical Male for Backplanes, Series 8077	42
Sequential Mating and Contact Length Series 7200 – Types A, B, C	7	Type E Vertical Male for Backplanes, Series 8077	43
Part Number Format Male/Female	8	Type L Vertical Male for Backplanes, Series 8074	44
Right Angle Female, Series 7200 – Shield Types and Selection	9	Type M Vertical Male Feed-To for Backplanes, Series 8075	45
J1/J4 Right Angle Female Series 7200 – Style A 25, 110 Contacts	10	Type A Right Angle Male for Daughter Cards, Series 8072	46
J2/J5 Type B Right Angle Female, Series 7200	12	Type B Right Angle Male for Daughter Cards, Series 8072	47
Right Angle Female Style B 22, 110 Contacts	13	Type C Right Angle Male for Daughter Cards, Series 8072	48
J3 Right Angle Female Series 7200 – Style B 19, 95 Contacts	14	Press-fit Tools	49
Right Angle Female Series 7200 – Style B 25, 125 Contacts	16	Shroud, Type B for Midplane and Rear I/O Assemblies	50
Right Angle Female Series 7200 – Style C 11, 55 Contacts	18	Shroud, Type A and C for Midplane and Rear I/O Assemblies	51
J4 Type A Right Angle Female with Split Shield (Computer Telephony) Series 7200	20	Coding Keys Type A Male (Backplane) / Female (Daughter Card)	52
Right Angle Female with Split Shield (Computer Telephony)	21	High Power Contacts for L, M and N Connectors, Series 8489	54
Type D Right Angle Female for Daughter Cards, Series 8077	22	Coax Contacts for L and M Connectors, Series 8489	55
Type E Right Angle Female for Daughter Cards, Series 8077	23	Special Contacts for L, M and N Connectors	56
Type F Right Angle Female for Daughter Cards, Series 8077	24	Connectors Type A, B, C, 2mm Hard-Metric Custom Design Worksheet – Series 7200	57
Type AB Right Angle Female for Daughter Cards, Series 8071	25	Connectors Type D, E, F, 2mm Hard-Metric Custom Design Worksheet – Series 8075/8077	58
Type L Right Angle Female for Daughter Cards, Series 8074	27	Part Number Index	59
Type M Right Angle Female for Daughter Cards, Series 8075	28		
Type A Vertical Female for Backplanes, Series 8072	30		
Type B Vertical Female for Backplanes, Series 8072	31		
Vertical Male Style A 25, 154 Contacts, Series 7200	32		
Vertical Male Style B 25, 175 Contacts, Series 7200	34		
Vertical Male Style B 22, 154 Contacts, Series 7200	36		

NOTICE: Specifications are subject to change without notice. Contact your nearest AVX Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable, but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all applications.

Connectors according to IEC 61076-4-101

The 2.0mm hard metric connectors made by AVX are developed and produced in accordance to the international engineering standards IEC 61076-4-101. Because of this users all over the world have a standard for the connection of printed circuit boards with high density connectors. The boards can be changed from one system to another without any problems. Important parameters like alignment, shielding and coding

remain compatible beyond the application. This specification has been selected as the CompactPCI® bus architecture by the PCI Industrial Computer Manufacturers Group (PICMG). AVX connectors have been specifically designed to fit in Position P1/P4, J1/J4 and P2/P5; J2/J5 for CompactPCI® applications and P0/J0 in the VME 64 extension format. AVX also offers full custom connector service to meet the specific needs of given markets and systems.

THE AVX ADVANTAGE

- Modular connector system with 2.0mm grid for CompactPCI® backplane and daughter cards.
- Insulators are beveled at each end to guarantee accurate positioning on the printed circuit board.
- Five, seven and eight signal rows plus two shield rows for optimum transmission performance.

CODING

To avoid mixing printed circuit boards Type A connectors use coding keys in accordance with IEC61076-4-101. Coding keys are inserted into the multi-function cavity by hand.

TYPE A MULTI-FUNCTION CAVITY & PRE-ALIGNMENT GUIDES

Type A connectors are equipped with a multi-function cavity and pre-alignment guides. The guides ensure proper alignment between the boards during mating. The cavity accepts coding keys in accordance with IEC61076-4-101 to prevent mis-mating of boards.

MODULAR SHIELDING

Modular shielding of female connectors enables high speed data transmission in high frequency application. Reduces the crosstalk level and allows an increase of the performance to subnanosecond pulse rise time if used in a differential pair application.

12 different contact sizes for custom configurations

AVX vertical male hard metric connectors have 3 different lengths at the mating side and 4 lengths at the terminal side. The different lengths are required for certain earliest make last break connections on signal or group contacts.

APPROVALS AND SPECIFICATIONS

AVX hard metric connector system meets the requirements of IEC 61076-4-101.

TELCORDIA (FORMERLY BELLCORE) GR-1217-CORE

AVX hard metric connectors are designed to meet the requirements of Telcordia Technologies (formerly BellCore), GR-1217-Core.

ISO9001

The complete hard metric connector system is manufactured in fully approved ISO9001 and QS9000 facilities.

PICMG®

The hard metric connector system meets the requirements of the CompactPCI® specification as defined by the PCI Industrial Computer Manufacturers Group.



PCI Industrial Computer Manufacturers Group, (PICMG), is a consortium of Industrial Computer Product vendors with the mission of designing specifications for PCI-based systems and boards to be used in industrial and telecommunications applications. For more information on PICMG visit their website at www.picmg.org

Multi-Line Module Connectors For CompactPCI®



TECHNICAL SPECIFICATIONS

Contact Spacing		2.0mm grid
Current Rating		1.0A/contact / 70°C
Voltage Rating		250V maximum
Dielectric Withstanding Voltage		750VAC rms/minute
Insulation Resistance	contact / contact	10 ⁴ M Ω minimum
	contact / shielding	10 ⁴ M Ω minimum
Contact Resistance		20m Ω maximum
Insertion Force	contact	n x 0.75 N maximum
	inclusive shielding	n x 1.00 N maximum
Separation Force	contact	n x 0.15 N minimum
	inclusive shielding	n x 0.15 N minimum
Operating Temperature		-55° to +125°C

MATERIAL

Contact	Plug	Phosphor Bronze
	Receptacle	Phosphor Bronze
Insulator	Plug	PBT 30% Glass Filled, UL 94V-0 Rated
	Receptacle	PBT 30% Glass Filled, UL 94V-0 Rated
Shroud		PBT 30% Glass Filled, UL 94V-0 Rated
Code Key		Glass Filled Polyester, UL 94V-0 Rated
Ground Return Shields		Phosphor Bronze


FINISH SERIES 7200

Finish Code		Class	Mating Cycle	Mating Area	Other Mating	Press-fit Area
001 / 004	male	1	>500	Au 1.27µm min.	Au 1.27µm min.	SnPb 2µm min. (001) / Ni 1.27µm min. (004)
002 / 005	male	2	>250	Au 0.80µm min.	Au 0.80µm min.	SnPb 2µm min. (002) / Ni 1.27µm min. (005)
001	female	1	>500	Au 1.27µm min.		SnPb 2µm min.
002	female	2	>250	Au 0.80µm min.		SnPb 2µm min.

FINISH SERIES 8071, 8072, 8077

Finish Code		Class	Mating Cycle	Mating Area	Other Area	Press-fit Area
833	male female	2	≥250	Pd/Ni 0.65µm min. Gold 0.1µm min.	Au 0.05µm	SnPb 1.2-2.0µm
863/517	male female	2	≥250	Au 0.76µm min.	Au 0.05µm	SnPb 1.2-2.0µm

COMPLIANT PINS

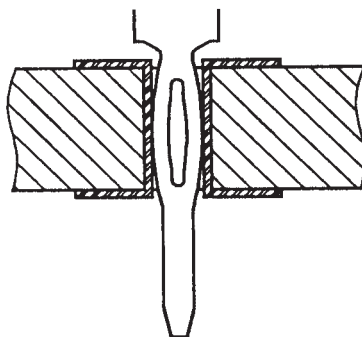

AVX Multi-Line Module Connectors utilize the original VARIPIN™ press-fit technology for reliable solderless applications.

Multi-Line Module Connectors For CompactPCI® – Series 7200



BOARD SPECIFICATIONS

P.C. Board Thickness	Drilled Hole	Copper Plate	Tin Plate	Plated Hole
min. 1.4mm	0.7±0.025	25-50µm	4-10µm	0.6±0.05


DIELECTRIC WITHSTANDING VOLTAGE

Row Designation		Fully Loaded	Every Other Position	Chessboard Pattern
Row a+c+e Row b+d	Within the row	750 V eff	1500 V eff	—
	Between the rows	1500 V eff	1500 V eff	—
Row a+b+c Row a+b+c+d Row a+b+c+d+e	Within the row	750 V eff	1500 V eff	1500 V eff
	Between the rows	750 V eff	750 V eff	1200 V eff


CREEPAGE DISTANCES AND CLEARANCES DEPENDENT ON CONTACT LAYOUT

Row Designation		Fully Loaded		Every Other Position		Chessboard Pattern	
		Backplane	Daughter Card	Backplane	Daughter Card	Backplane	Daughter Card
		Male	Female	Male	Female	Male	Female
		Connector	Connector	Connector	Connector	Connector	Connector
Row a+c+e Row b+d	Within the row	0.8	0.6	2.5	2.5	—	—
	Between the rows	2.5	2.5	2.5	2.5	—	—
Row a+b+c Row a+b+c+d Row a+b+c+d+e	Within the row	0.8	0.6	2.5	2.5	2.5	2.5
	Between the rows	0.8	0.6	0.8	0.6	1.5	1.2

DERATING DIAGRAM

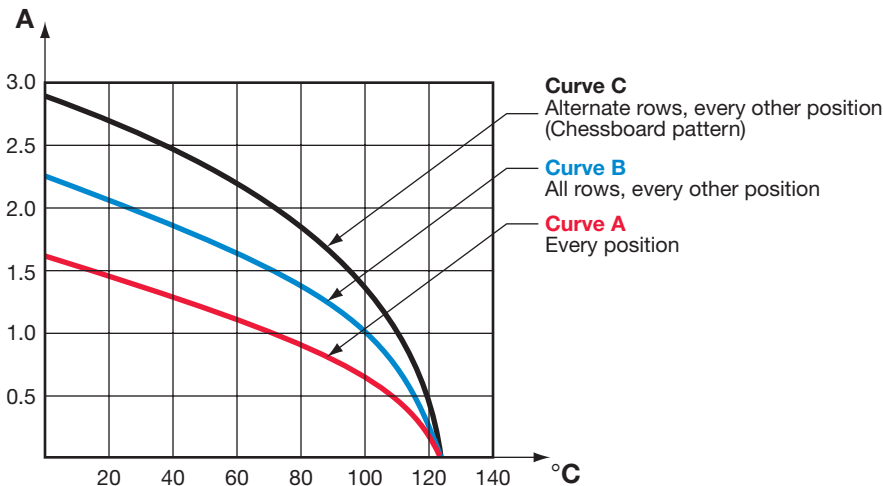

Multi-Line Module Connectors For CompactPCI® – Series 7200

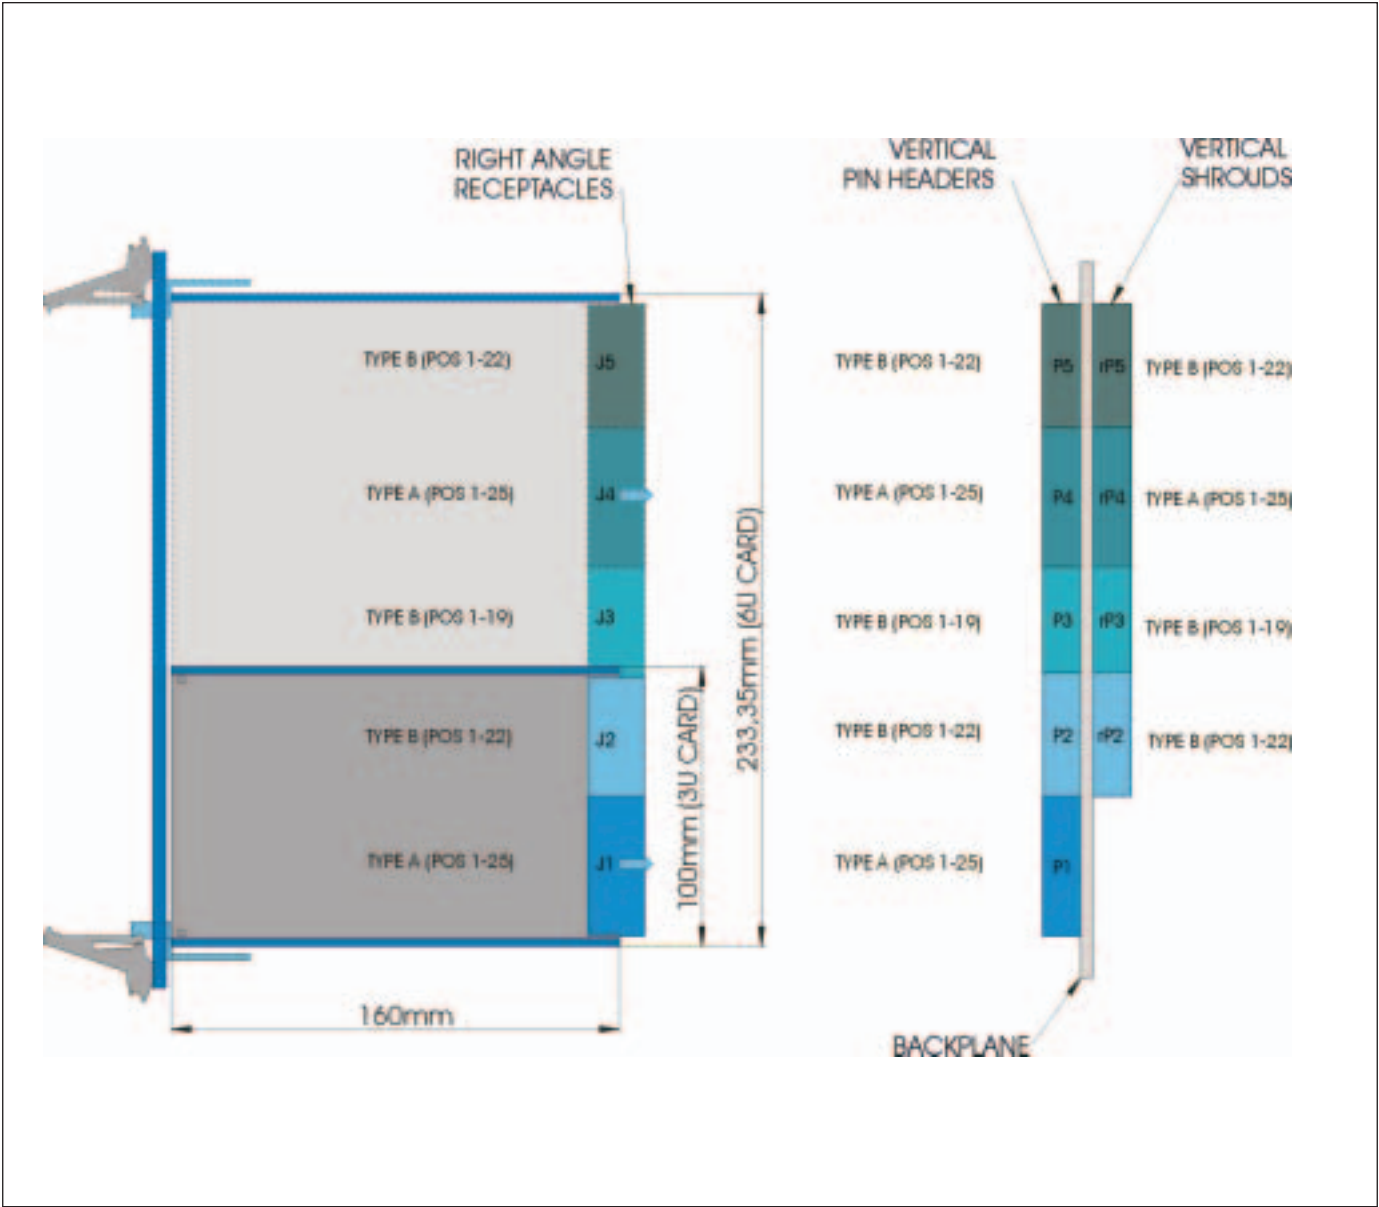


Multi-Line Module Connectors For CompactPCI® – Series 7200



Electrical Performance and High Frequency Characteristics Series 7200


In relation to today's market requirements AVX 2mm Hard Metric Connectors are designed for an excellent performance at high frequency applications. Unique design guarantees excellent signal transmission. Reduced crosstalk versions with optional, modular shielding are available. Transmission characteristics are measured and simulated in the time and frequency domain (see TDR Plot below). Test reports are available which allow a total overview about technical

performance. To enable an advanced circuit simulation, a Spice Simulation Program (Simulator Program for Integrated Circuit) is available at our web site: www.avx.com. Due to uniform contact spacing, constant distances and total encapsulation of terminals almost ideal 50Ohm characteristic impedance as well as a very low propagation delay and consistent low signal skew is reached.

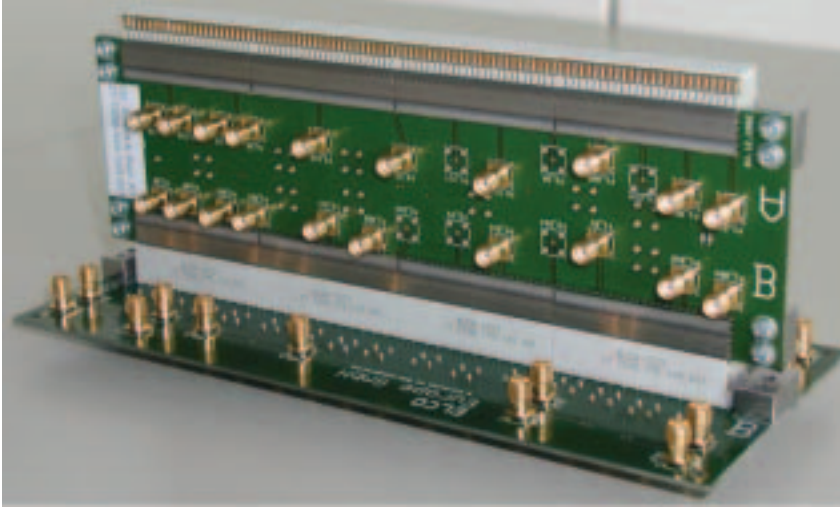

Test Boards for Spice Model Verification

A comparison between Spice Model Simulation and corresponding measurements with this test board are made to verify the simulation.

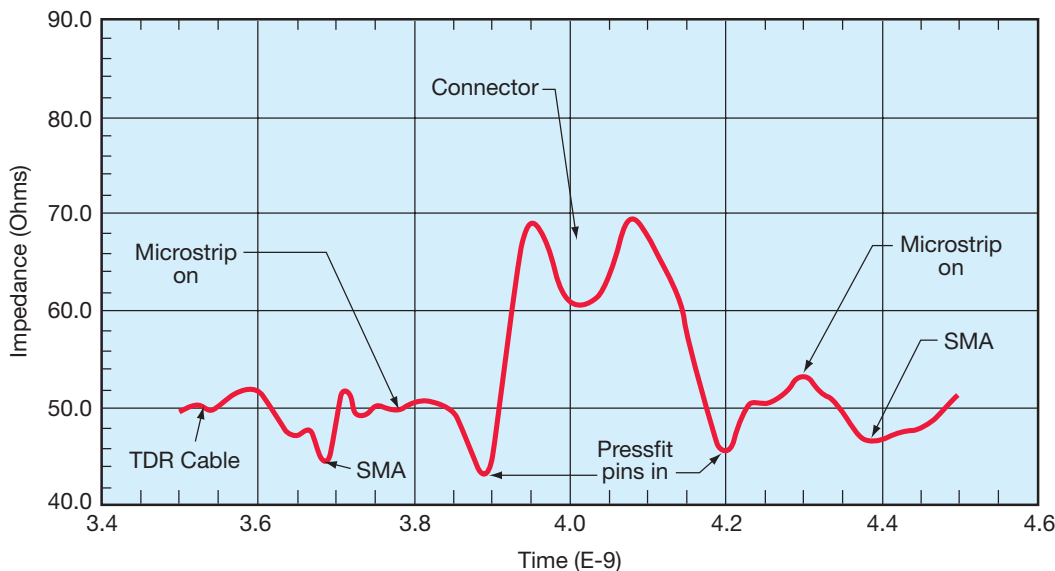

TDR Plot showing impedance curve

This diagram shows the typical impedance of the signal path from the first SMA connector to the daughter card to the second SMA connector on the backplane. The y-axis directly shows the impedance in Ohm.

Multi-Line Module Connectors For CompactPCI® – 7200




High Frequency Characteristics – Series 7200

The table below will summarize the electrical performance of any board with similar pin assignments. Beside the already stated continuous Impedance and the low Propagation


Delay, the connectors also perform in a very low Capacitance and Inductance which makes them ideal for high speed applications.

Parameter	Row				
	a	b	c	d	e
Capacitance C (pF) f = 300MHz	2.1	2.2	2.4	2.6	2.6
Inductance L (nH) f = 300MHz	4.5	6.3	6.8	7.2	8.5
Characteristic Impedance (Ω) $Z = \sqrt{L/C}$	46	54	53	53	57
Propagation Delay (ps)	104	114	124	134	146
Signal Skew (ps)	10		10		
		10		12	
Near End Crosstalk (dB) f = 300MHz	-25.4 (a-b)		-	-22.2 (d-e)	
Reflection Factor 50 Ohm f = 300MHz	0.016	0.016	0.016	0.017	0.04
VSWR f = 300MHz	1.03	1.03	1.03	1.03	1.08
Reflection Loss (dB) f = 300MHz	35.9	35.9	35.9	35.4	28.0

PIN Configuration Crosstalk Measurements

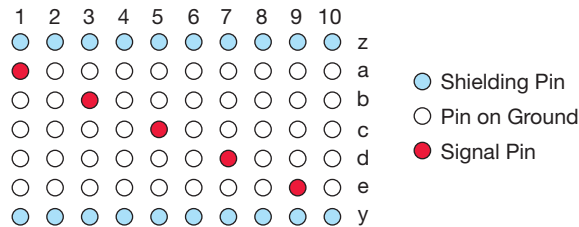

PIN Configuration Through Measurements

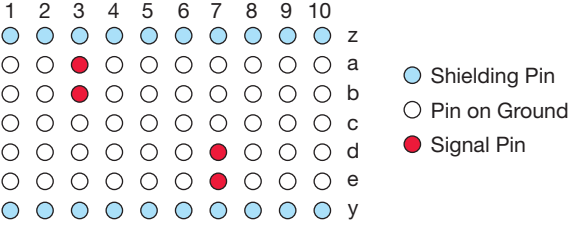


Sequential Mating and Contact Length

Series 7200 – Types A, B, C



The AVX hard metric connector system can provide 12 standard contacts in any configuration to provide 3 level sequential mating and either front or rear mating. 3 level

length is in 1.5mm increments to ensure sequential mating (as first mate, last break) and (last mate, first break).

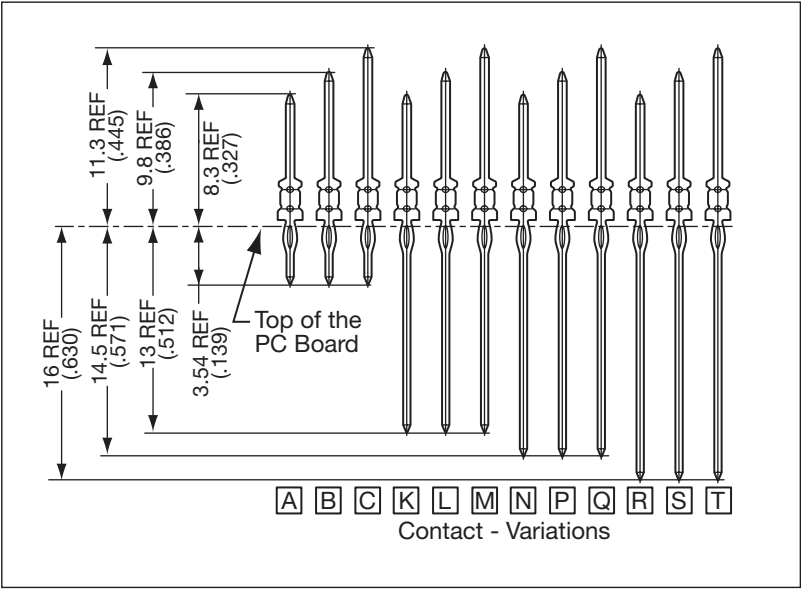

MIDPLANE AND HORIZONTAL MATING APPLICATIONS

- 3 pin lengths in the front or rear allow for sequential mating in midplane applications.
- Rear shrouds are used in conjunction with the long pin lengths K-T (see chart above).
- Three shroud thicknesses allow for a full range of backplane thicknesses from 1.6mm to 6.0mm.

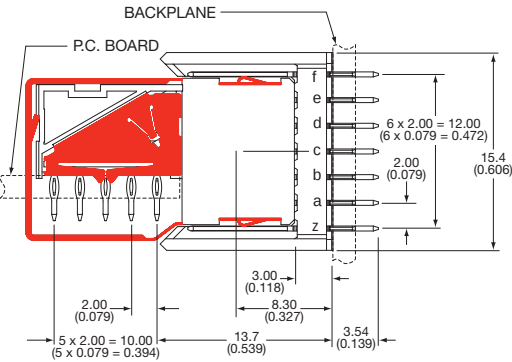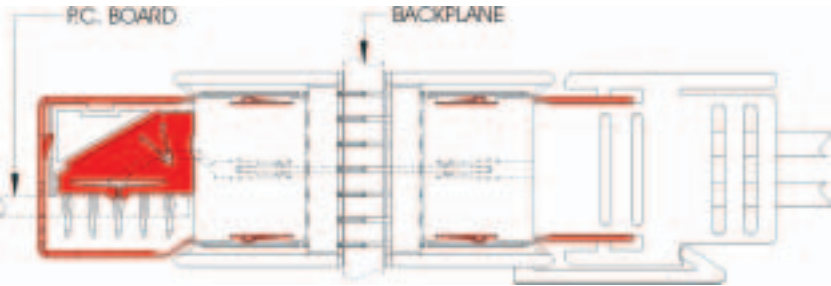


Multi-Line Module Connectors

Series 7200 – Part Number Format




MALE PART NUMBER FORMAT

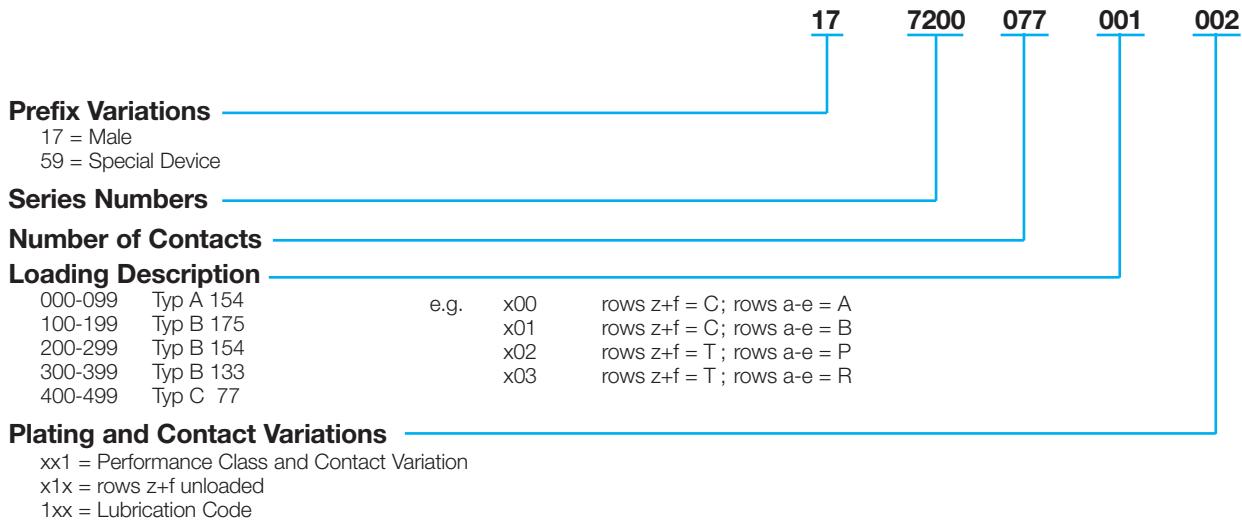

e.g.	001	PC Contact, Performance Class I	012	PC Contact, Performance Class II
	002	PC Contact, Performance Class II		rows z+f unloaded
	004	Two mating areas, Performance Class I	102	PC Contact, Performance Class II, lubricated
	007	Gold all over, Performance Class I		
	011	PC Contact, Performance Class I, rows z+f unloaded	114	Two mating areas, Performance Class I, rows z+f unloaded, lubricated

FEMALE PART NUMBER FORMAT

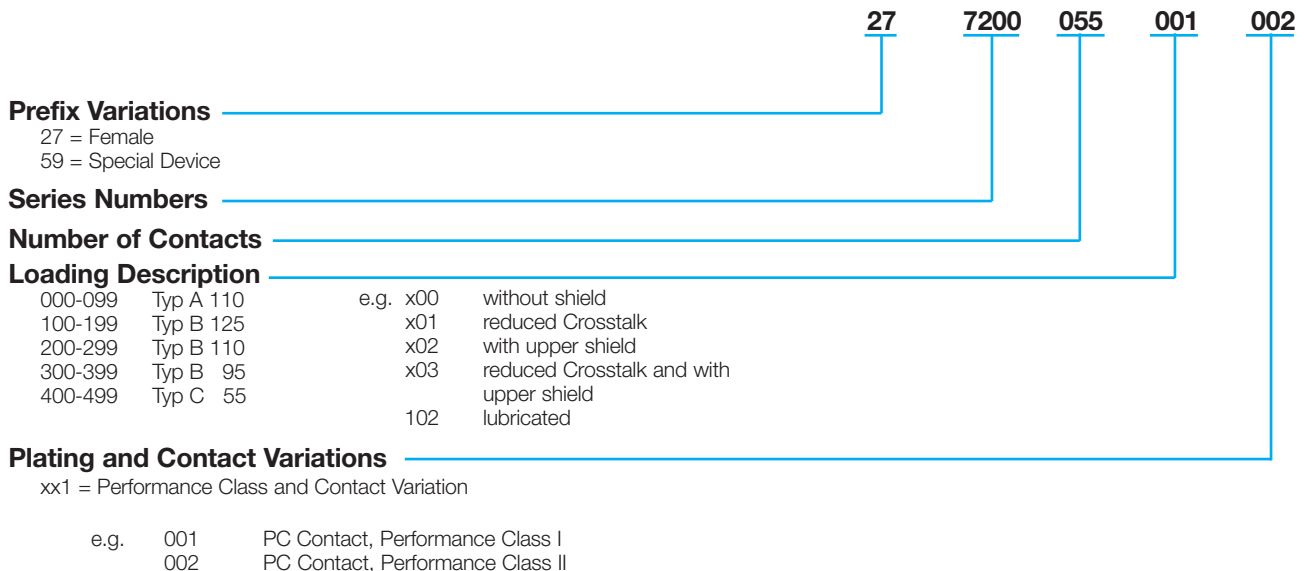


Right Angle Female

Series 7200 – Shield Types and Selection




STANDARD VERSION

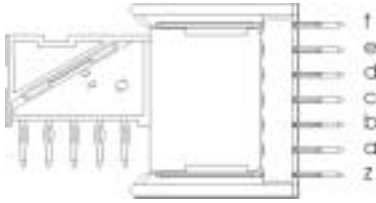

- 5 row version with 250 contacts / 100mm (3.937)
- Signal ground ration 4:1 (50 signal / 100mm)

G	G	G	G	G	G	G	G	G	G	G
G	S	G	S	G	S	G	S	G	S	G
G	G	G	G	G	G	G	G	G	G	G
G	S	G	S	G	S	G	S	G	S	G
G	G	G	G	G	G	G	G	G	G	G


UPPER AND LOWER GROUND RETURN SHIELDS

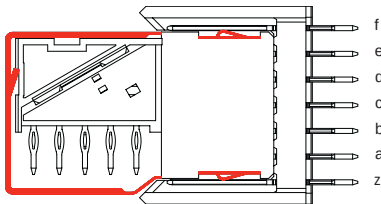

- Enables better transmission performance
- Rows f and z mating to top and bottom shields
- Allows an increase to 75 signals / 100mm (3.937)

G	S	G	S	G	S	G	S	G	S	G
G	G	G	G	G	G	G	G	G	G	G
G	S	G	S	G	S	G	S	G	S	G
G	G	G	G	G	G	G	G	G	G	G
G	S	G	S	G	S	G	S	G	S	G


7200 SERIES REDUCED CROSSTALK VERSION

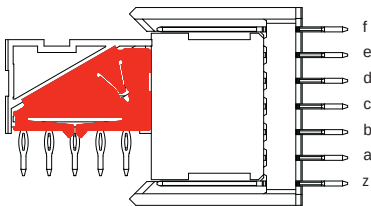

- Metal shield grounded to row c
- Optional board grounding
- Allows increase in density to 100 signals / 100mm (3.937)
- Reduces crosstalk

G	G	G	G	G	G	G	G	G	G	G
S	S	S	S	S	S	S	S	S	S	S
G	G	G	G	G	G	G	G	G	G	G
S	S	S	S	S	S	S	S	S	S	S
G	G	G	G	G	G	G	G	G	G	G

7200 SERIES UPPER AND LOWER GROUND RETURN SHIELDS AND REDUCED CROSSTALK VERSION

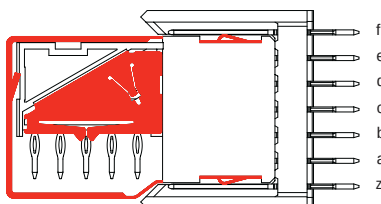


- Can increase performance to subnanosecond rise times if used with differential pairs
- Lower impedance peaks
- Reduced propagation delay

S	S	S	S	S	S	S	S	S	S	S
S	S	S	S	S	S	S	S	S	S	S
G	G	G	G	G	G	G	G	G	G	G
S	S	S	S	S	S	S	S	S	S	S
S	S	S	S	S	S	S	S	S	S	S


Contact Factory for detailed information

J1/J4 Right Angle Female

Series 7200 – Style A 25, 110 Contacts

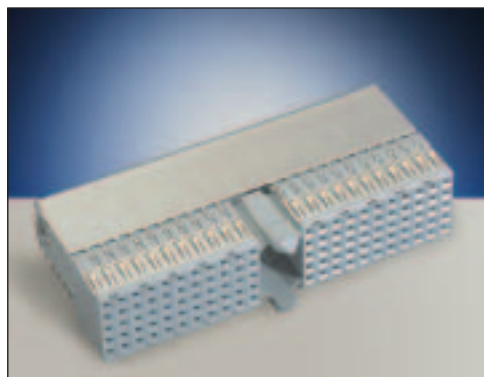





- 110 signal contacts in 5 rows of 25 positions
- Center cavity with pre-alignment guides and polarization option (uses 3 positions)
- Designed for gas tight press-fit installations
- This connector can be used by itself or in conjunction with Style B or C connectors
- Used in positions J1 and J4 of the CompactPCI® specification (Daughter Card)
- Available with or without upper ground return shield
- Lower shield available (see page 11)
- Reduced crosstalk version available (see page 11)
- See pages 52 and 53 for keying options

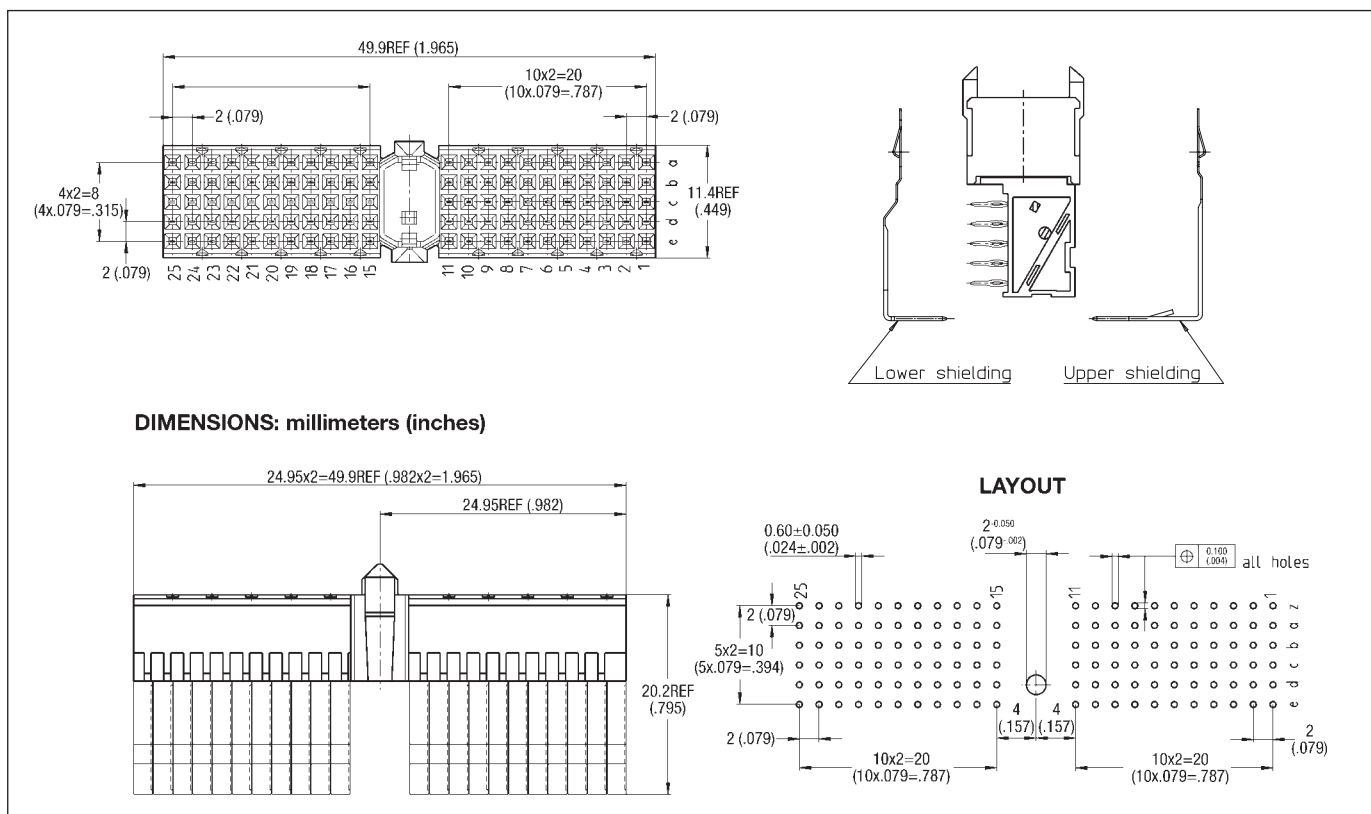

Right Angle Female

Series 7200 – Style A 25, 110 Contacts



Shielding Version	Cavity	Performance Class	Part Number
J1, J4 / Without Shield 	110	2	27 7200 110 000 002
J1, J4 / Reduced Crosstalk 	110	2	27 7200 110 001 002
J1, J4 / Upper Shield 	110	2	27 7200 110 002 002
J1, J4 / Upper Shield and Reduced Crosstalk 	110	2	27 7200 110 003 002
Lower Shield 	110	2	67 7200 2643 00 675

Technical description and dimensions see page 9 and 10




J2/J5 Type B Right Angle Female

Series 7200




- 110 signal contacts in 5 rows of 22 positions
- Daughter card applications
- Designed for gas tight press-fit installations
- Fills positions J2 and J5 of the CompactPCI® specification
- Available with or without upper ground return shield
- This connector should be used in conjunction with a Type A or AB style, to ensure proper mating alignment
- Reduced crosstalk version available (see page 13)
- Lower ground return shield available (see page 13)

DIMENSIONS: millimeters (inches)

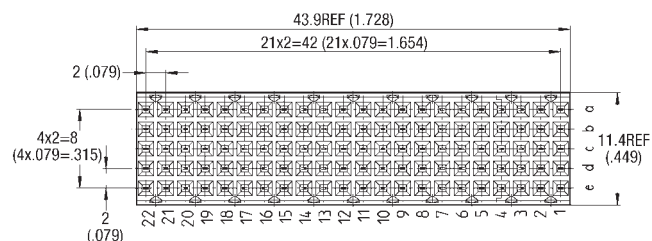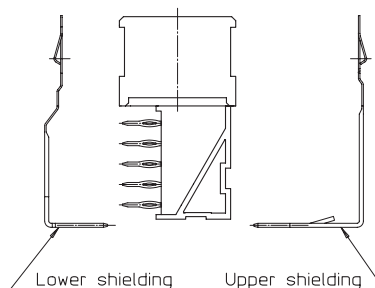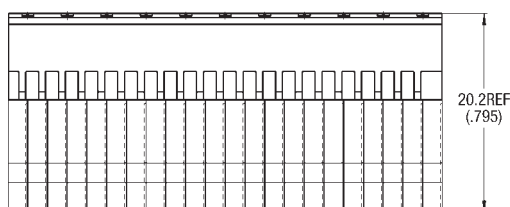





LAYOUT

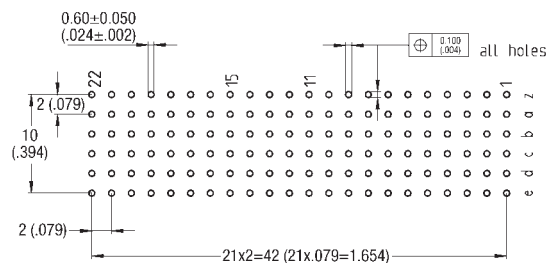

Right Angle Female

Style B 22 – 110 Contacts



Shielding Version	Cavity	Performance Class	Part Number
J2, J5 / Without Shield 	110	2	27 7200 110 200 002
J2, J5 / Reduced Crosstalk 	110	2	27 7200 110 201 002
J2, J5 / Upper Shield 	110	2	27 7200 110 202 002
J2, J5 / Upper Shield and Reduced Crosstalk 	110	2	27 7200 110 203 002
Lower Shield 	110	2	67 7200 2633 00 675

Technical description and dimensions see page 9 and 12




J3 Right Angle Female

Series 7200 – Style B 19, 95 Contacts




- 95 signal contacts in 5 rows of 19 positions
- Daughter card applications
- Designed for gas tight press-fit installations
- Available with or without upper ground return shield
- Fills positions J3 of the CompactPCI® specification
- This connection also fills position P0 of the VME 64 extension specification
- This connector should be used in conjunction with a Type A or AB style, to ensure proper mating alignment
- Reduced crosstalk version available (see page 15)
- Lower ground return shield available (see page 15)

DIMENSIONS: millimeters (inches)

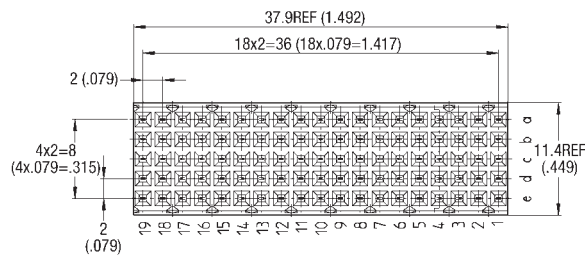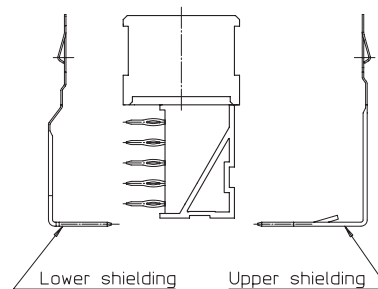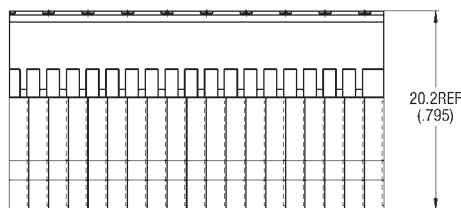





LAYOUT

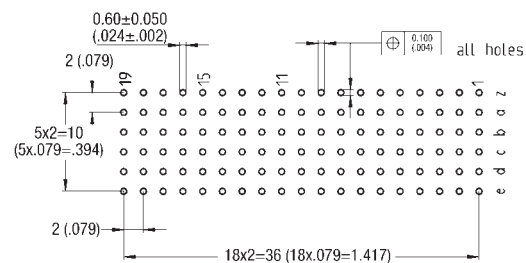


Right Angle Female

Style B 19 – 95 Contacts



Shielding Version	Cavity	Performance Class	Part Number
J3 / Without Shield 	95	2	27 7200 095 300 002
J3 / Reduced Crosstalk 	95	2	27 7200 095 301 002
J3 / Upper Shield 	95	2	27 7200 095 302 002
J3 / Upper Shield and Reduced Crosstalk 	95	2	27 7200 095 303 002
Lower Shield 		2	67 7200 2623 00 675

Technical description and dimensions see page 9 and 14




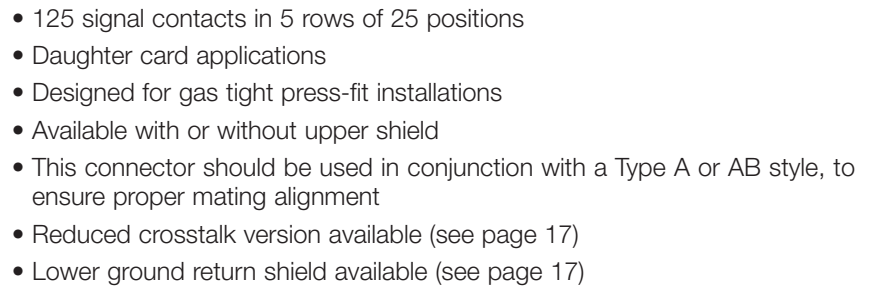


Technical drawing of a 24x48 hole grid. The grid consists of 24 columns and 48 rows of holes. The overall width is 24x2 = 48 (24x.079 = 1.890). The overall height is 48x.079 = 3.944. The hole diameter is 0.100 (+0.003 / -0.004). The hole pitch is 0.60 ± 0.050 (0.024 ± 0.002). The drawing includes dimensions for the hole diameter, hole pitch, and overall width and height, along with a note for all holes.

Right Angle Female

Style B 25 – 125 Contacts




Shielding Version	Cavity	Performance Class	Part Number
Without Shield 	125	2	27 7200 125 100 002
Reduced Crosstalk 	125	2	27 7200 125 101 002
Upper Shield 	125	2	27 7200 125 102 002
Upper Shield and Reduced Crosstalk 	125	2	27 7200 125 103 002
Lower Shield 		2	67 7200 2653 00 675

Technical description and dimensions see page 9 and 16




Right Angle Female

Series 7200 – Style C 11, 55 Contacts

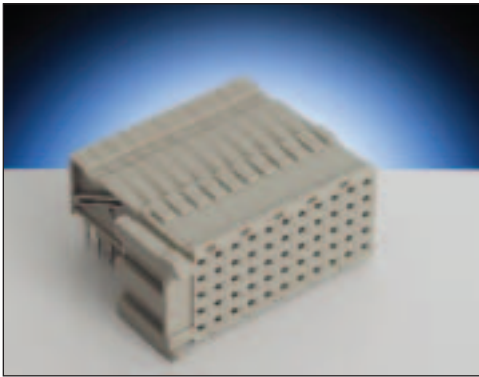


- 55 signal contacts in 5 rows of 11 positions
- Daughter card applications
- Designed for gas tight press-fit installations
- Available with bottom pegs for secure P.C. board mounting
- This connector is designed for end positions only
- Available with or without upper ground return shield
- Reduced crosstalk version available (see page 19)
- Lower ground return shield available (see page 19)

DIMENSIONS: millimeters (inches)

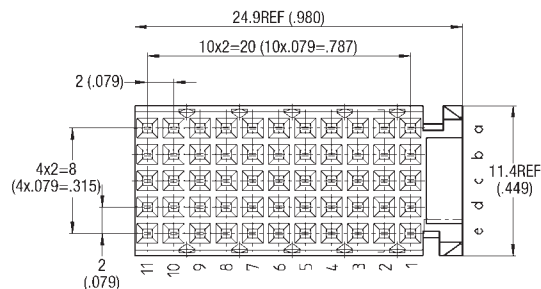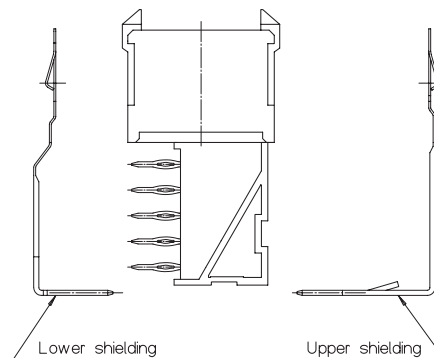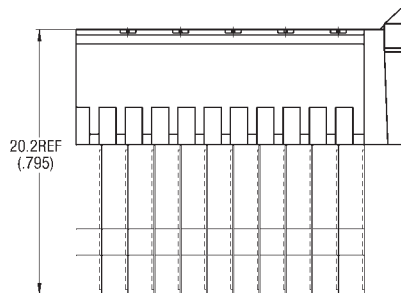





LAYOUT

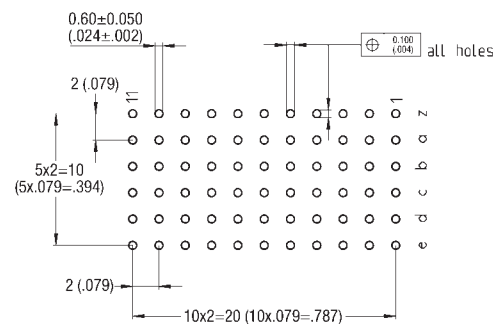

Right Angle Female

Style C 11 – 55 Contacts




Shielding Version	Cavity	Performance Class	Part Number
Without Shield 	55	2	27 7200 055 400 002
Reduced Crosstalk 	55	2	27 7200 055 401 002
Upper Shield 	55	2	27 7200 055 402 002
Upper Shield and Reduced Crosstalk 	55	2	27 7200 055 403 002
Lower Shield 		2	67 7200 2613 00 675

Technical description and dimensions see page 9 and 18

J4 Type A Right Angle Female with Split Shield (Computer Telephony)




Series 7200

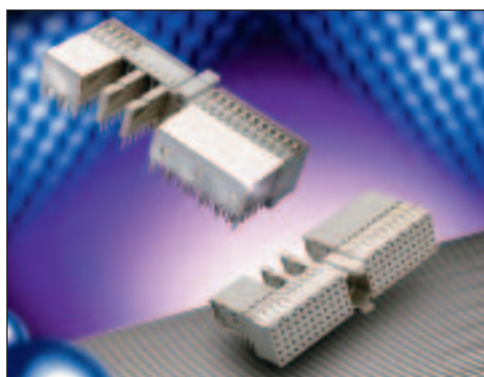


- 90 signal contacts in a 5 x 25 configuration (18 positions used)
- Center cavity with pre-alignment guides and keying option (uses 3 positions)
- See pages 52 and 53 for keying options
- Designed for gas tight press-fit installation
- Available with or without upper ground return shield
- This connector can be used by itself or in conjunction with Style B or C connectors
- Daughter card applications
- Used in position J4 of the CompactPCI® Computer Telephony specification
- Lower ground return shield available (see page 21)



Dimensions: millimeters (inches)

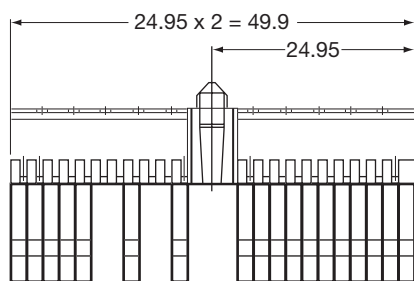

Versions 007 and 008



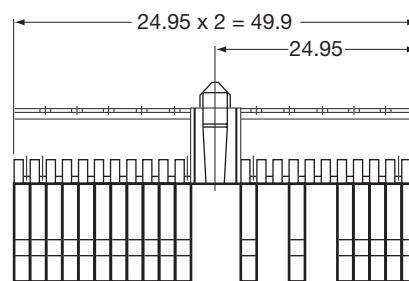


Versions 009 and 010

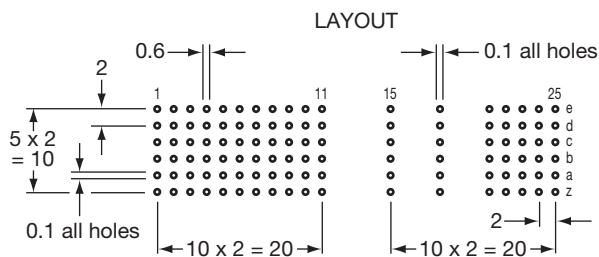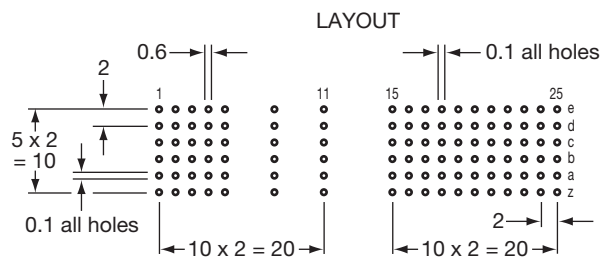

Right Angle Female with Split Shield (Computer Telephony)




Shielding Version	Cavity	Performance Class	Part Number
Upper Shield, loaded Pos. 1-5, 8, 11, 15-25  J4 Computer Telephony	90	2	27 7200 090 007 002
Upper Shield and Reduced Crosstalk, loaded Pos. 1-5, 8, 11, 15-25 	90	2	27 7200 090 008 002
Upper Shield, loaded Pos. 1-11, 15, 18, 21-25 	90	2	27 7200 090 009 002
Upper Shield and Reduced Crosstalk, loaded Pos. 1-11, 15, 18, 21-25 	90	2	27 7200 090 010 002
Lower Shield 		2	67 7200 2613 00 675
Lower Shield 		2	67 7200 2663 00 675

Technical description and dimensions see page 9 and 20

Type D Right Angle Female for Daughter Cards


Series 8077

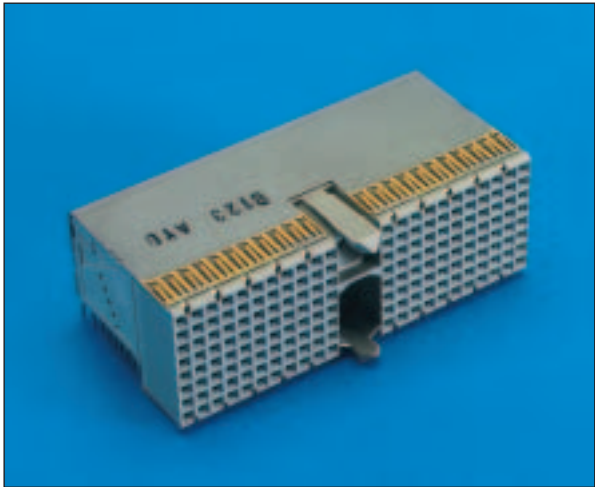

- 176 contacts in a 8 x 25 position configuration
- Center cavity with pre-alignment guides and keying option (uses 3 positions)
- See pages 52 and 53 for keying options
- Designed for gas tight press-fit installation
- Available with or without upper ground return shield
- This connector can be used by itself or in conjunction with Style E or F connectors


27 8077 176 001 863 = Type D Right Angle Female without top shield
27 8077 176 011 863 = Type D Right Angle Female with top shield

Plating Code	Contact Area	Press-fit Area	Under Coat
863	0.76µm min. Au	1.5-3.0µm Solder	Nickel 1.2-3.0µm

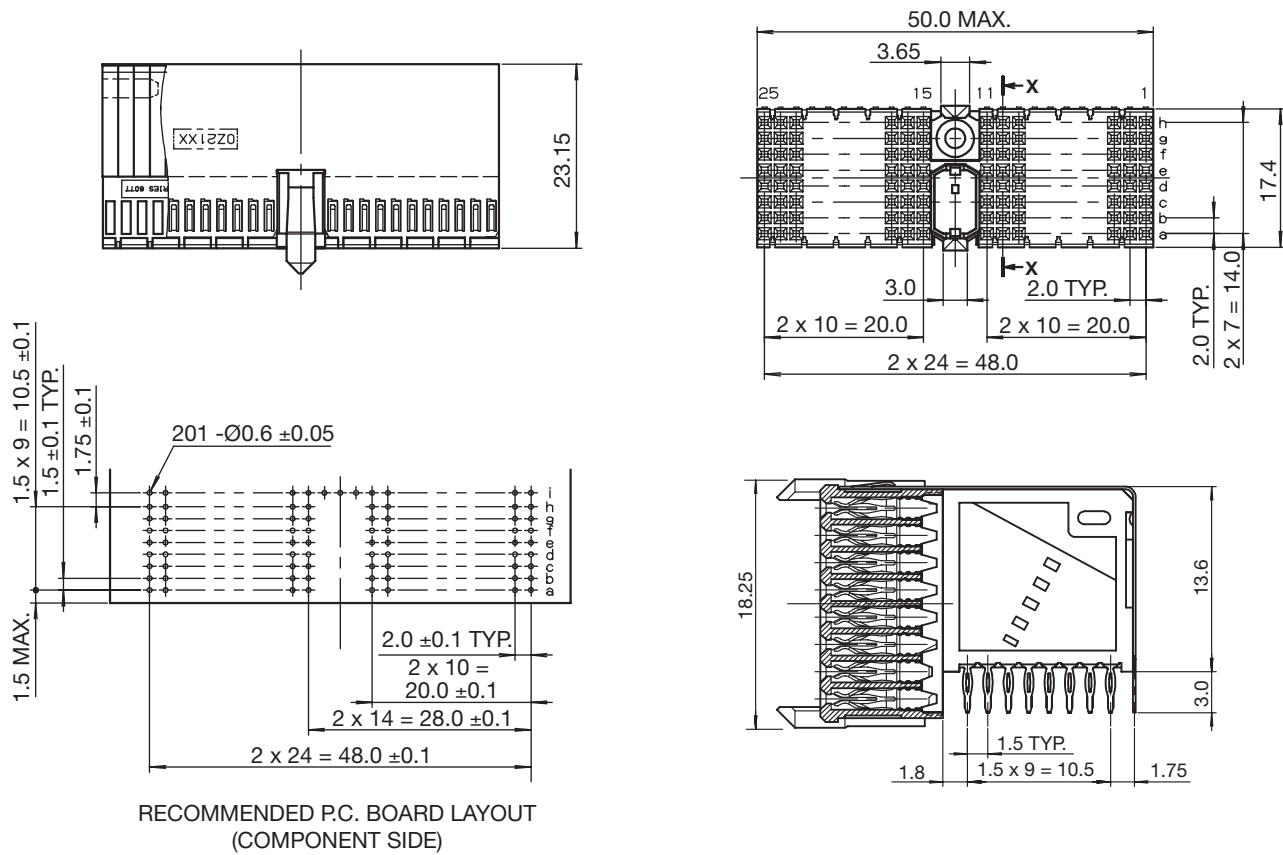

Type E Right Angle Female for Daughter Cards


Series 8077

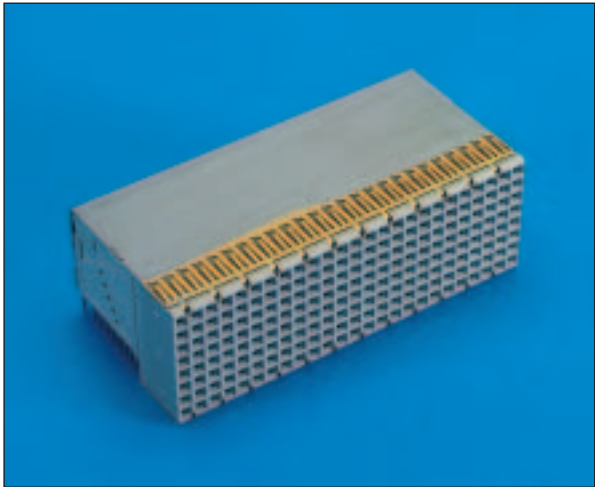

- 200 contacts in a 8 x 25 position configuration
- Designed for gas tight press-fit installation
- Available with or without upper ground return shield
- This connector should be used in conjunction with a Type D style to ensure proper mating alignment

27 8077 200 000 863 = Type E Right Angle Female without top shield
27 8077 200 010 863 = Type E Right Angle Female with top shield


Plating Code	Contact Area	Press-fit Area	Under Coat
863	0.76µm min. Au	1.5-3.0µm Solder	Nickel 1.2-3.0µm

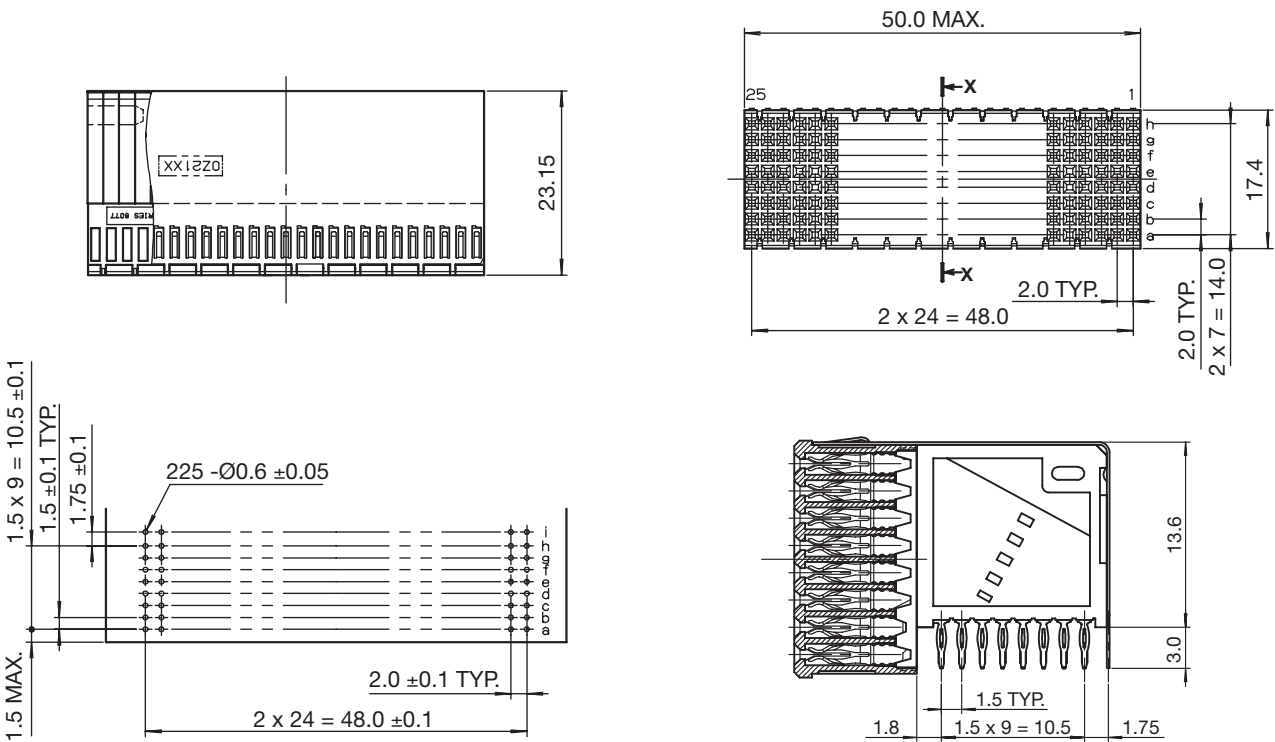

RECOMMENDED P.C. BOARD LAYOUT
(COMPONENT SIDE)

Type F Right Angle Female for Daughter Cards






Series 8077

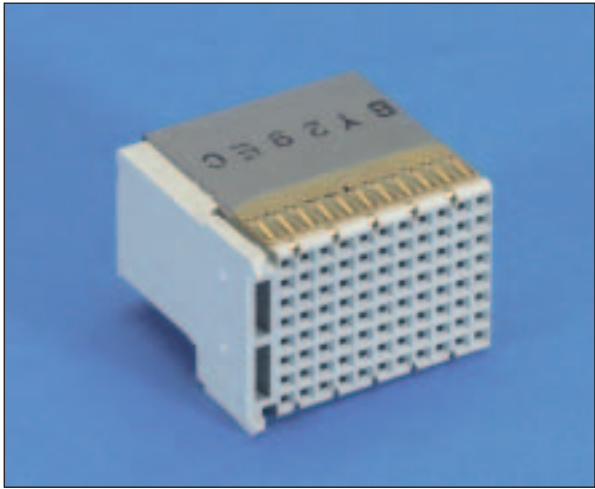

- 88 contacts in a 8 x 11 position configuration
- Designed for gas tight press-fit installation
- Available with or without upper ground return shield
- This connector can be used by itself or in conjunction with a Type D connector
- Should be used in end positions only

27 8077 088 001 863 = Type F Right Angle Female without top shield
27 8077 088 011 863 = Type F Right Angle Female with top shield


Plating Code	Contact Area	Press-fit Area	Under Coat
863	0.76µm min. Au	1.5-3.0µm Solder	Nickel 1.2-3.0µm

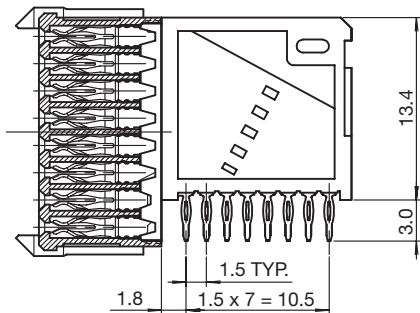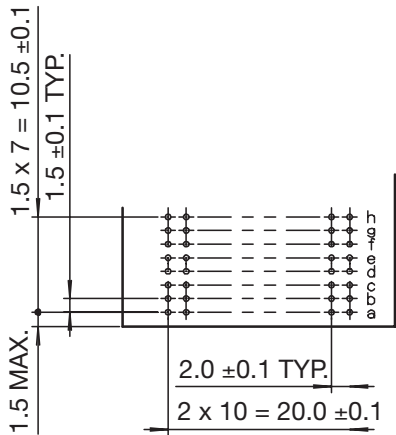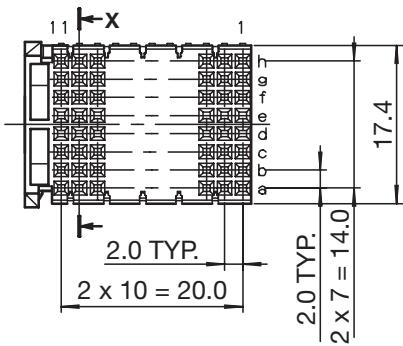

RECOMMENDED P.C. BOARD LAYOUT
(COMPONENT SIDE)

Type AB Right Angle Female for Daughter Cards

Series 8071

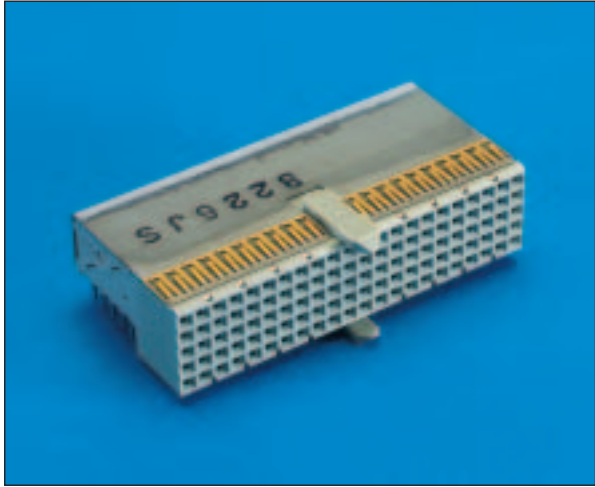


- 110 contacts in a 5 x 22 configuration
- Available with or without upper shield
- Designed for gas tight press-fit installation
- Available with or without upper ground return shield
- Prealignment guides
- This connector can be used by itself or in conjunction with a Type A, B, C female connector

27 8071 110 003 XXX = Type B 22 Vertical Female without upper shield

27 8071 110 013 XXX = Type B 22 Vertical Female with upper shield


XXX =

Plating Code	Contact Area	Press-fit Area	Under Coat
833	0.1µm min. Au.65µm Pd/Ni	1.5-3.0µm Solder	Nickel 1.2-3.0µm
863	0.76µm min. Au	1.5-3.0µm Solder	Nickel 1.2-3.0µm

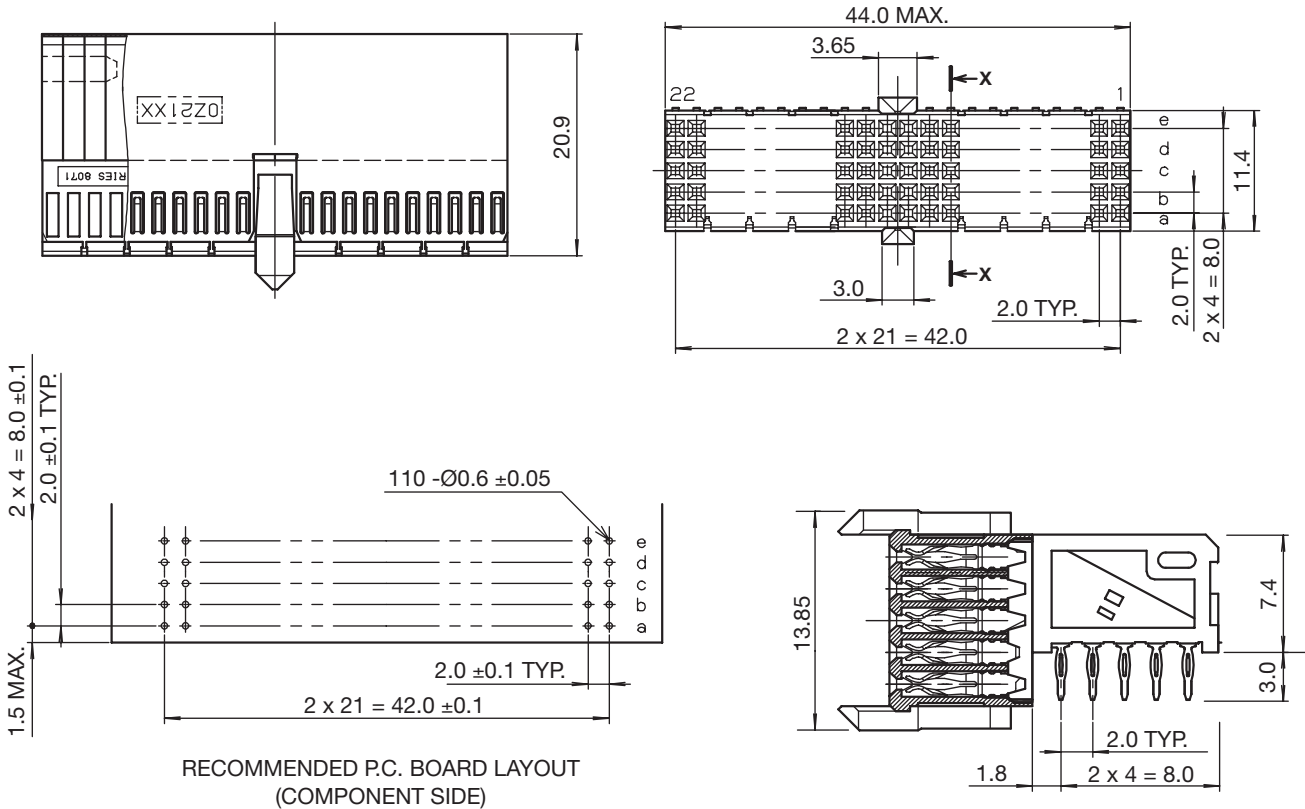

Type AB Right Angle Female for Daughter Cards




Series 8071

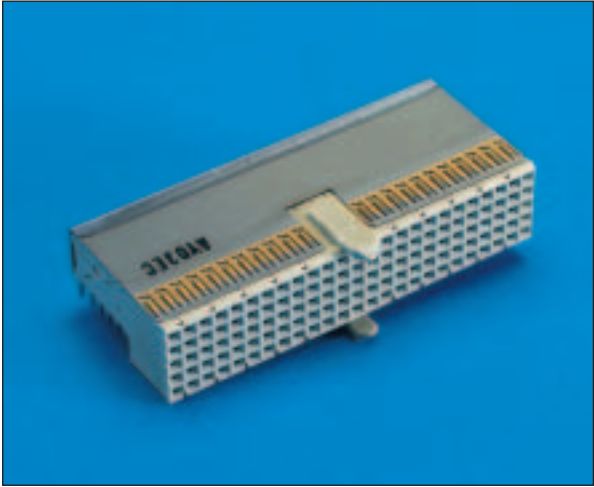


- 125 contacts in a 5 x 25 configuration
- Available with or without upper shield
- Designed for gas tight press-fit installation
- Available with or without upper ground return shield
- Prealignment guides
- This connector can be used by itself or in conjunction with Type A, B & C female connectors

27 8071 125 003 863 = Type AB Right Angle Female without upper shield
27 8071 125 013 863 = Type AB Right Angle Female with upper shield

Plating Code	Contact Area	Press-fit Area	Under Coat
863	0.76µm min. Au	1.5-3.0µm Solder	Nickel 1.2-3.0µm

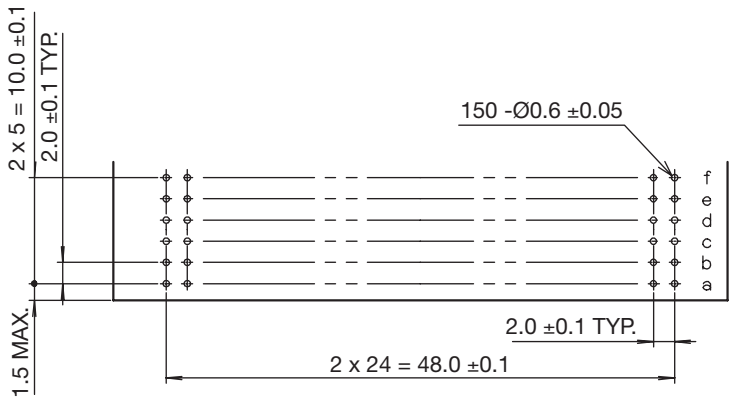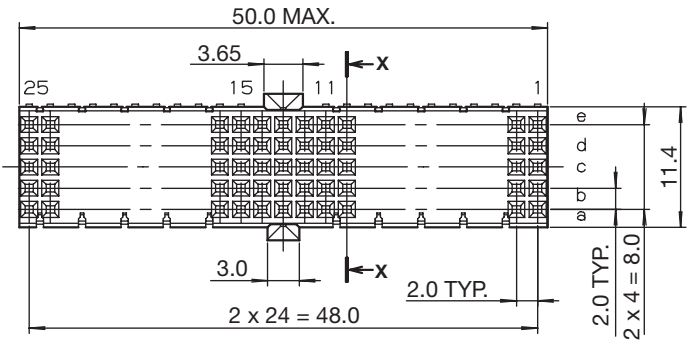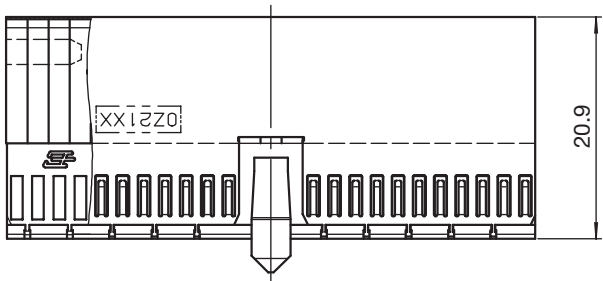


RECOMMENDED P.C. BOARD LAYOUT
(COMPONENT SIDE)

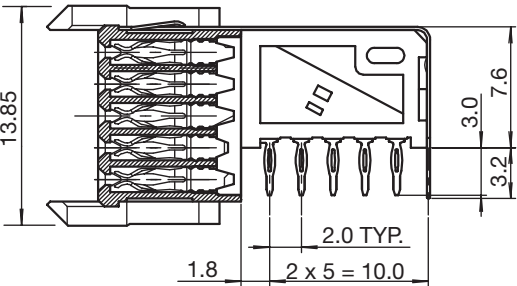

Type L Right Angle Female for Daughter Cards







Series 8074

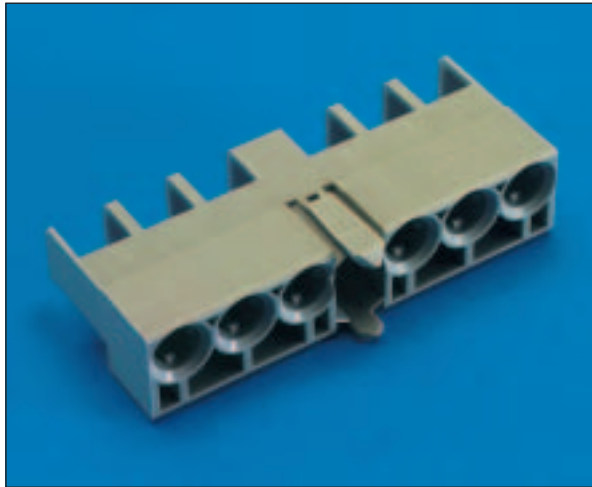

- 6 power or coax contact cavities configuration
- Center cavity with prealignment guides and keying option
- See pages 52 and 53 for keying options
- Available with or without board locating pegs
- This connector can be used by itself or in conjunction with Style B, C, or M connectors
- Contacts are ordered separately
- See pages 54 and 55 for available contacts


62 8074 006 011 007 = Type L Right Angle Female with mounting peg

62 8074 006 111 007 = Type L Right Angle Female without mounting peg

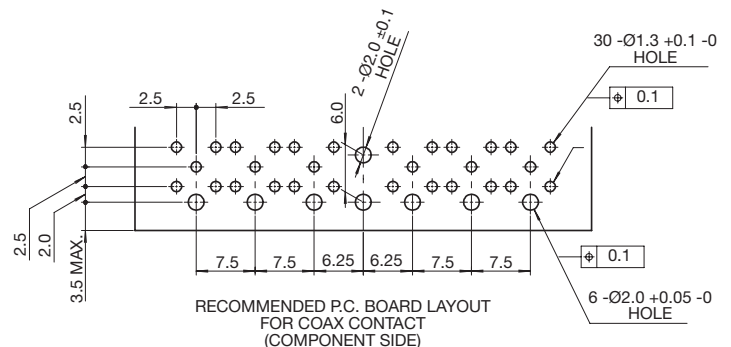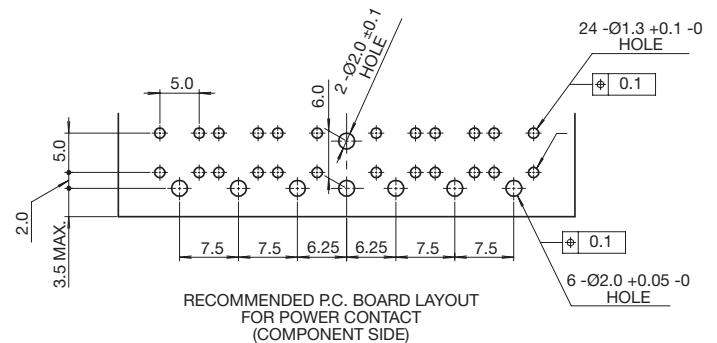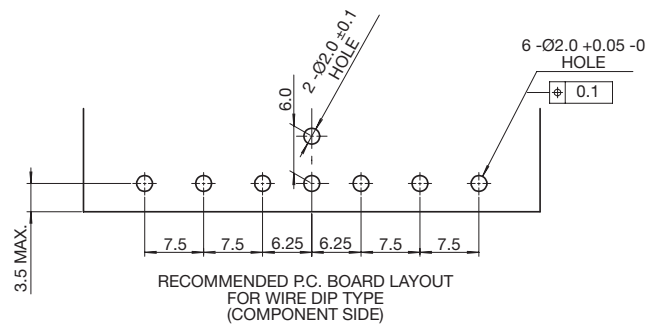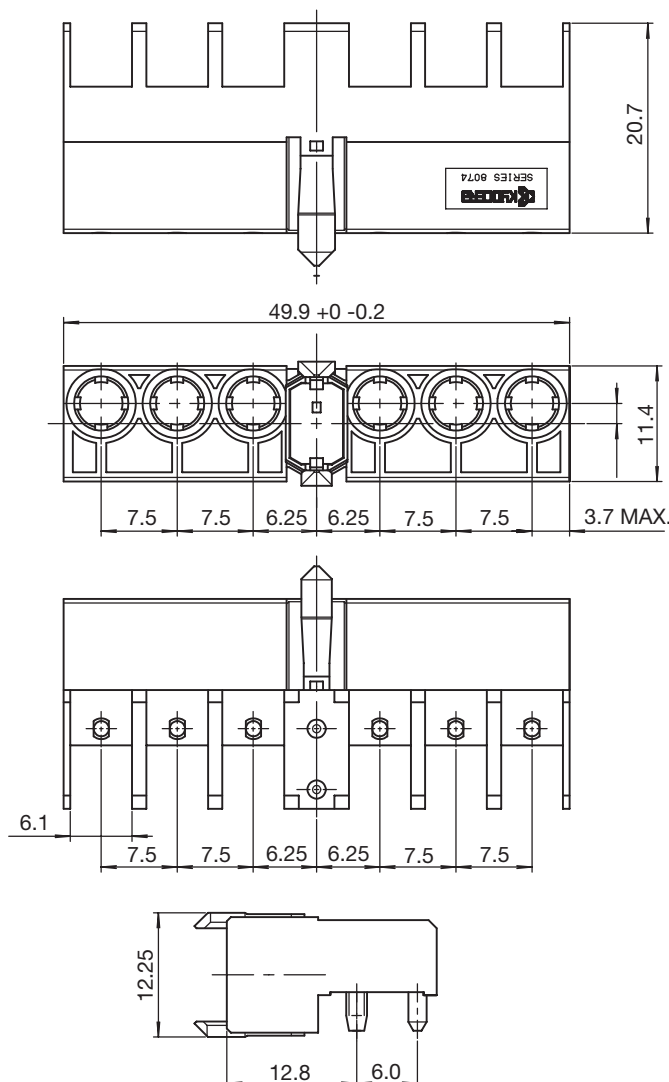

Type M Right Angle Female for Daughter Cards

Series 8075

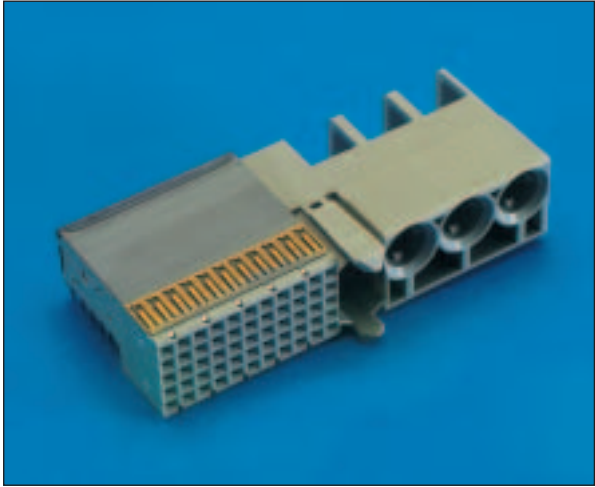






- 55 signal contacts in a 5 x 11 position configuration
- 3 positions for power or coax contacts
- Center cavity with prealignment guides and keying option
- See pages 52 and 53 for keying options
- Designed for gas tight press-fit installation
- This connector can be used by itself or in conjunction with Style A, B, C, or L connectors
- See pages 54 and 55 for available contacts

27 8075 355 011 XXX = Type M Right Angle Female with shield, with peg

27 8075 355 012 XXX = Type M Right Angle Female with shield, without peg

XXX =

Plating Code	Contact Area	Press-fit Area	Under Coat
833	0.1µm min. Au.65µm Pd/Ni	1.5-3.0µm Solder	Nickel 1.2-3.0µm
863	0.76µm min. Au	1.5-3.0µm Solder	Nickel 1.2-3.0µm

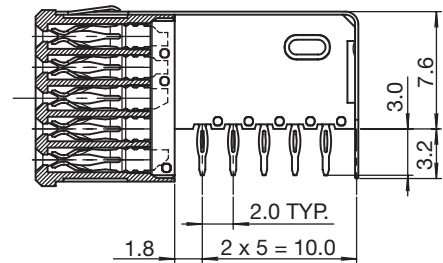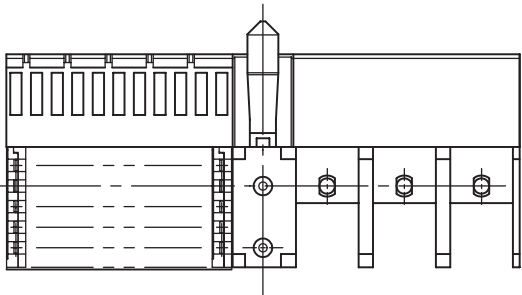
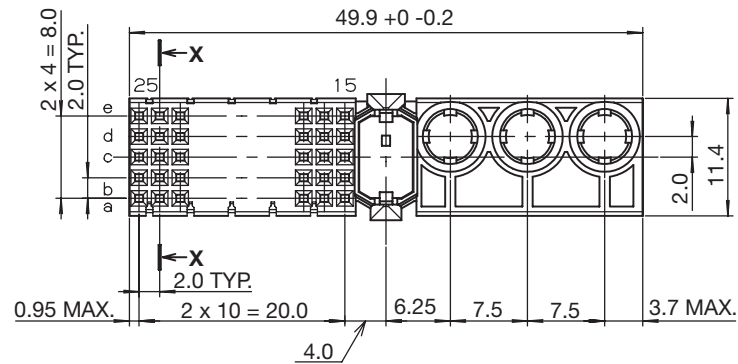
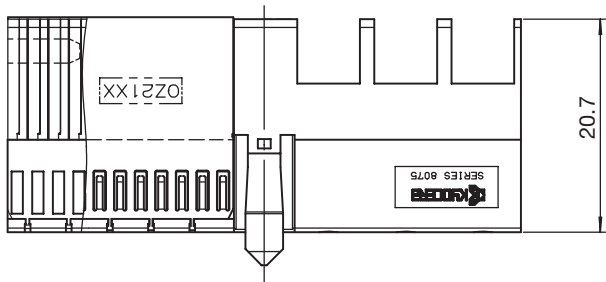


Type M Right Angle Female for Daughter Cards




Series 8075

BOARD LAYOUT

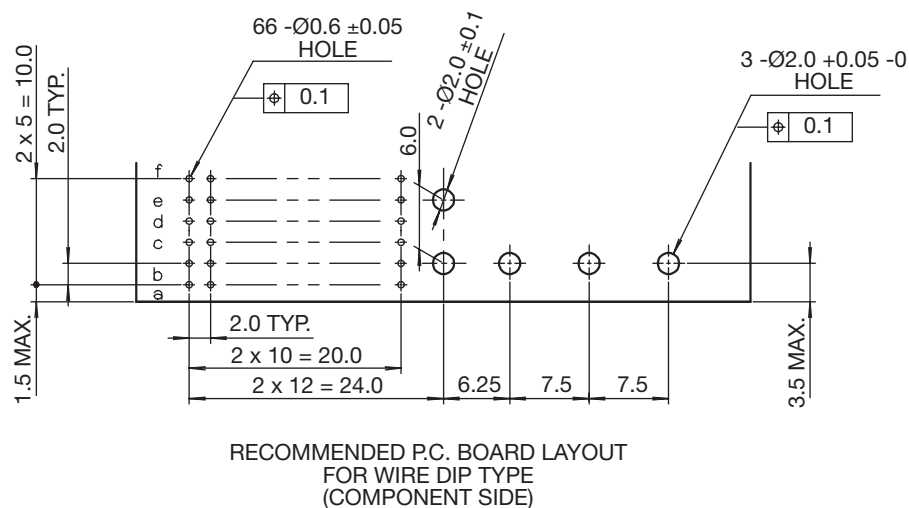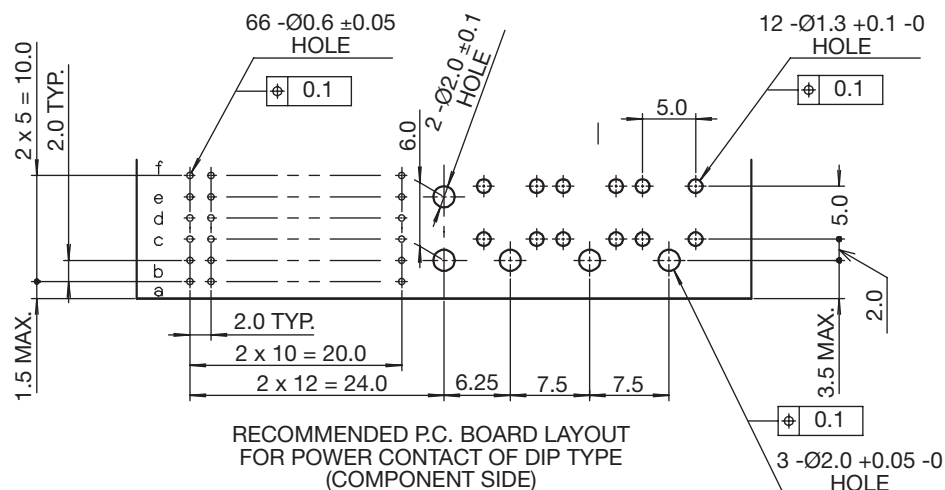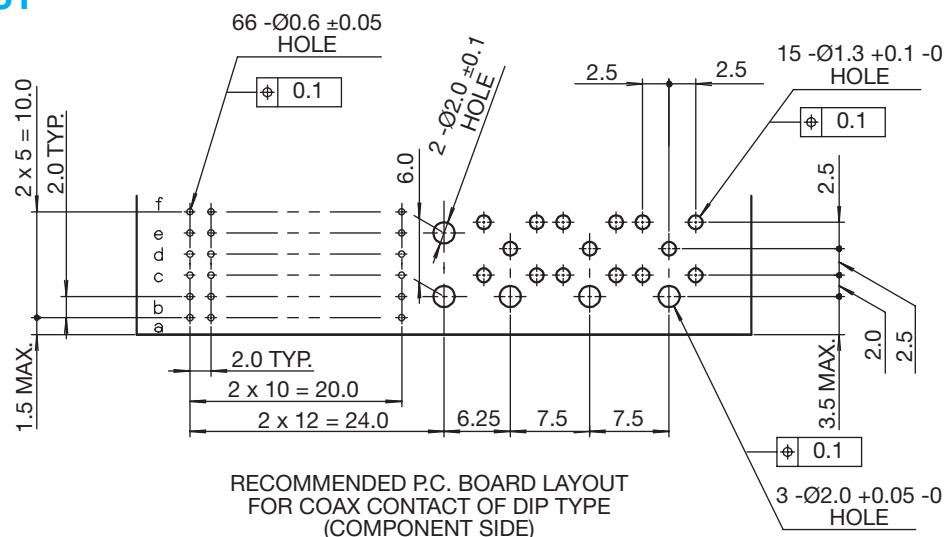

Type A Vertical Female for Backplanes

Series 8072

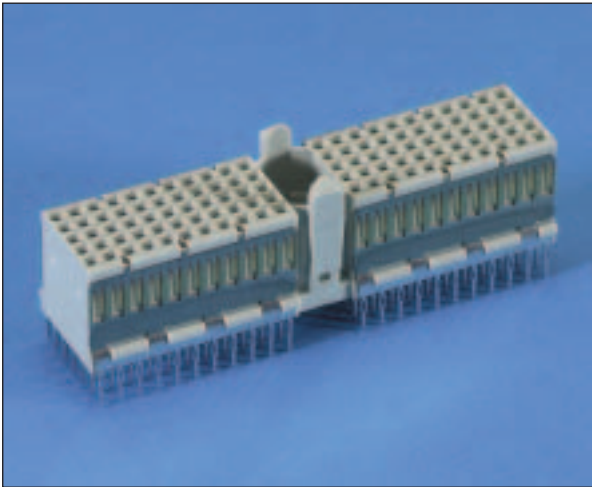


- 110 contacts in a 5 x 25 configuration
- Center cavity with prealignment guides and keying option (uses 3 positions)
- See pages 52 and 53 for keying options
- Available with or without side shields
- Designed for gas tight press-fit installation
- Can be used by itself or in conjunction with Type B & C vertical females


27 8072 110 001 863 = Type A Vertical Female without side shields

27 8072 110 011 863 = Type A Vertical Female with side shields

Plating Code	Contact Area	Press-fit Area	Under Coat
863	0.76µm min. Au	1.5-3.0µm Solder	Nickel 1.2-3.0µm

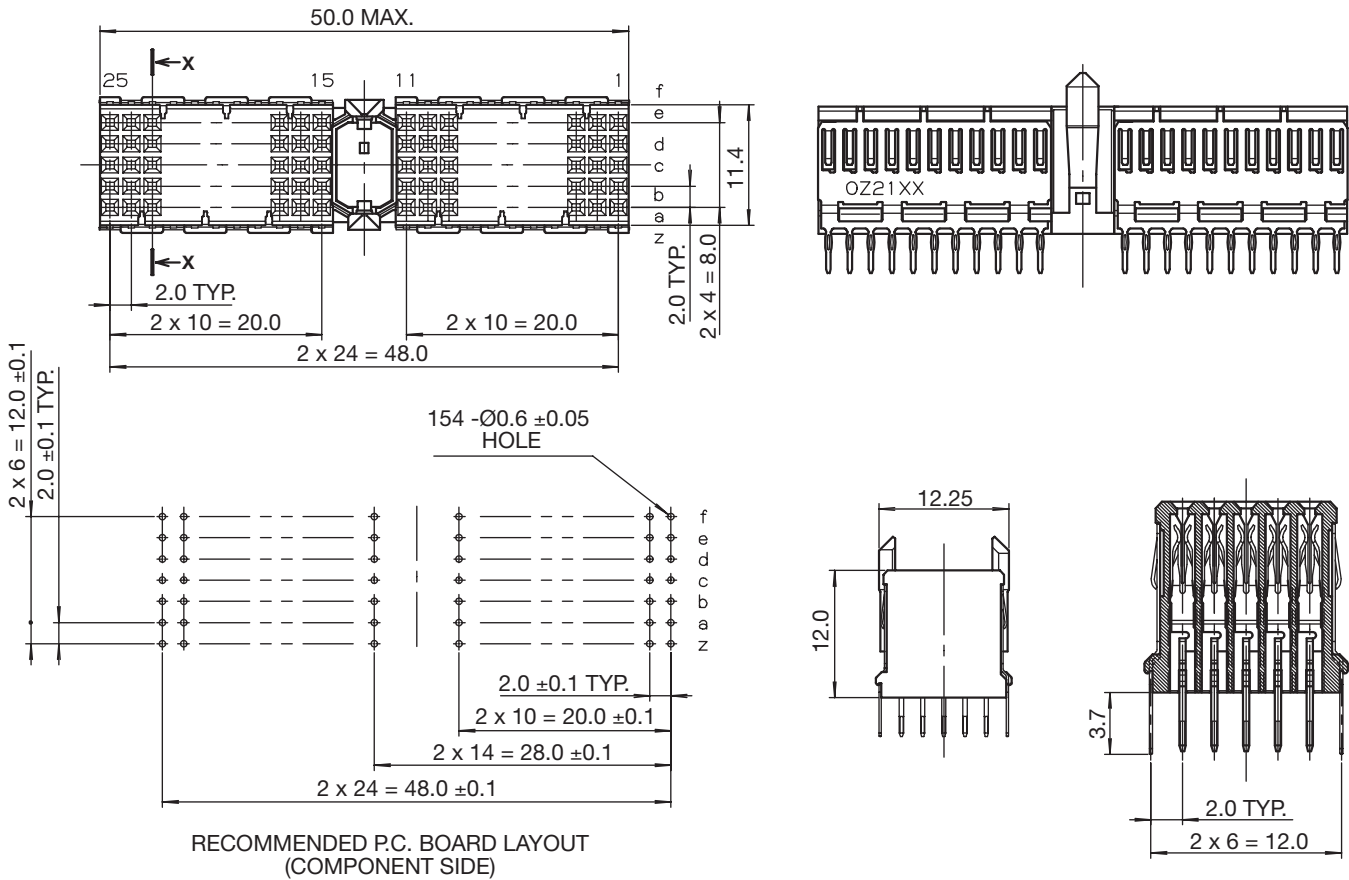


Series 8072

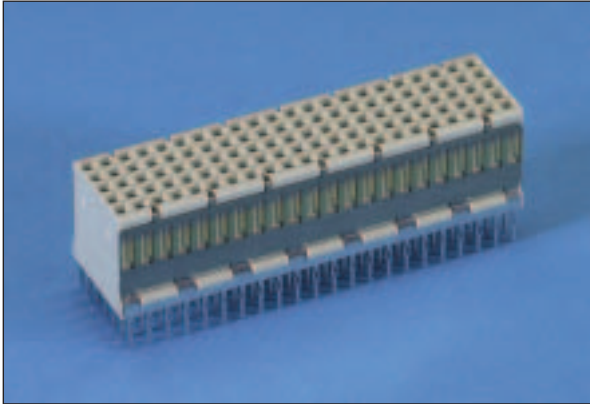



- 27 8072 095 001 XXX** = Type B19 Vertical Female without side shields
27 8072 095 011 XXX = Type B19 Vertical Female with side shields
27 8072 110 000 XXX = Type B22 Vertical Female without side shields
27 8072 110 010 XXX = Type B22 Vertical Female with side shields
27 8072 125 000 863 = Type B25 Vertical Female without side shields
27 8072 125 010 863 = Type B25 Vertical Female with side shields

Plating Code	Contact Area	Press-fit Area	Under Coat
833	0.1µm min. Au.65µm Pd/Ni	1.5-3.0µm Solder	Nickel 1.2-3.0µm
863	0.76µm min. Au	1.5-3.0µm Solder	Nickel 1.2-3.0µm

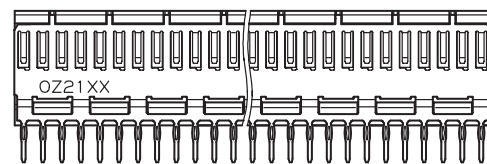

NO. OF POSITIONS	A	B
95	36.0	38.0
110	42.0	44.0
125	48.0	50.0

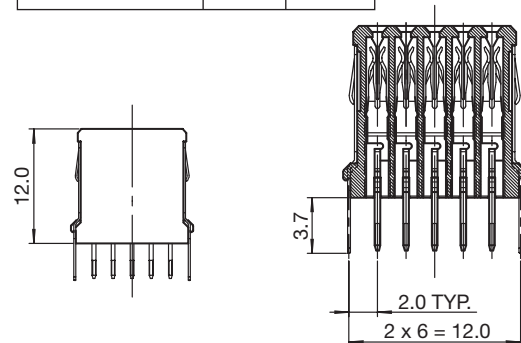

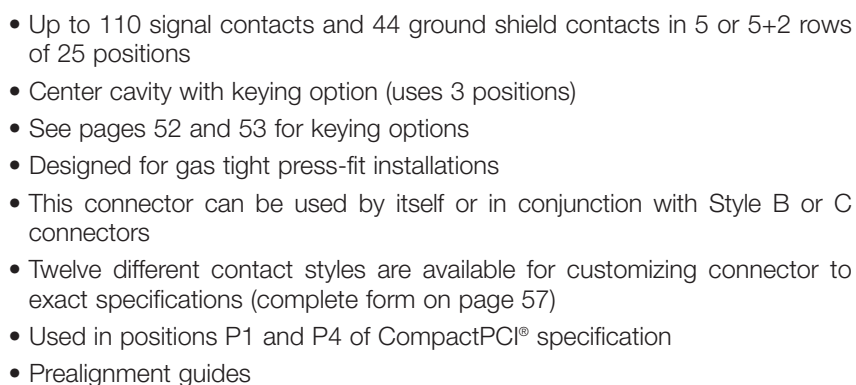

Technical drawing of a rectangular plate with a grid of holes. The plate has overall dimensions of 10x20 inches (254x508 mm). The grid consists of 10 columns and 20 rows of holes. The holes are spaced at 0.079 inches (2.007 mm) apart. The drawing includes dimensions for the hole spacing, the overall plate size, and the hole diameter (0.100 inches / 2.54 mm). A note indicates that all holes are 0.100 inches (2.54 mm) in diameter. The drawing is labeled 'Fig. 10.10' and 'Fig. 10.11'.

Vertical Male


Style A 25 – 154 Contacts





Pin Loading	Contacts	Performance Class	Part Number
	154	2	17 7200 154 000 002
	154	2	17 7200 154 001 002
CompactPCI® 	154	2	17 7200 154 002 005
CompactPCI® 	154	2	17 7200 154 003 005
	154	2	17 7200 154 004 005
CompactPCI® P1 / P4 	154	2	17 7200 154 005 002
CompactPCI® Hot Swap 	154	2	17 7200 154 006 002
CompactPCI® Computer Telephony 	100	2	17 7200 100 008 002

Technical description and dimensions see page 32



AVX will custom load connectors with any combination of the contacts in the table on page 35. Complete the form on page 57 and fax it to the number shown.

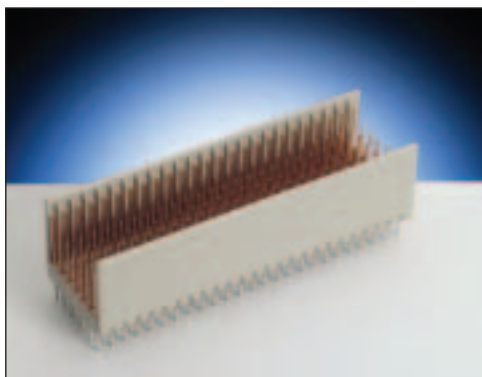

- DIMENSIONS:** millimeters (inches)

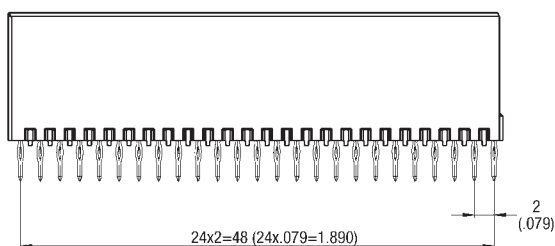

LAYOUT

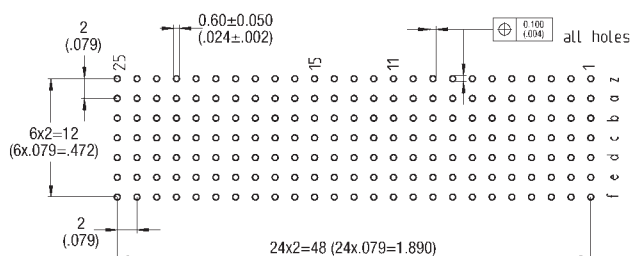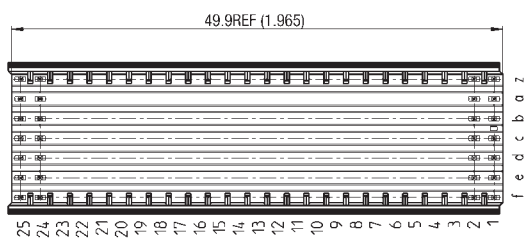

Vertical Male


Style B 25 – 175 Contacts



Pin Loading	Contacts	Performance Class	Part Number
	175	2	17 7200 175 100 002
	175	2	17 7200 175 101 002
	175	2	17 7200 175 102 005
	175	2	17 7200 175 103 005
	175	2	17 7200 175 104 005
	125	2	17 7200 125 100 012


Technical description and dimensions see page 34

AVX will custom load connectors with any combination of the contacts in the table below. Complete the form on page 57 and fax it to the number shown.

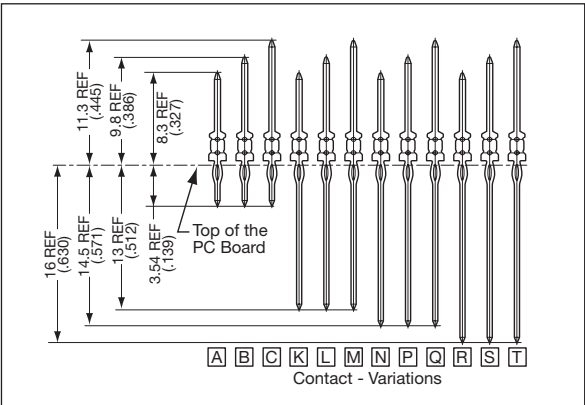




Vertical Male

Series 7200 – Style B 22, 154 Contacts

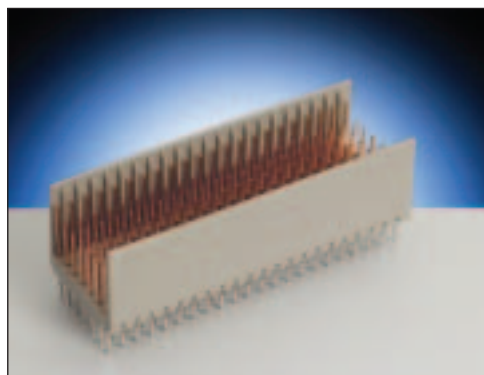


- Up to 110 signal contacts and 44 ground shield contacts in 5 or 5+2 rows of 22 positions
- Designed for gas tight press-fit installations
- Used in position P2 and P5 of the CompactPCI® specification
- Should be used in conjunction with a type A or AB connector
- Twelve different contact styles are available for customizing connector to exact specifications (complete form on page 57)

DIMENSIONS: millimeters (inches)

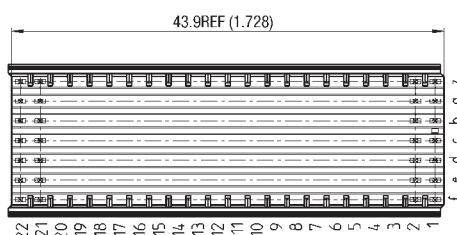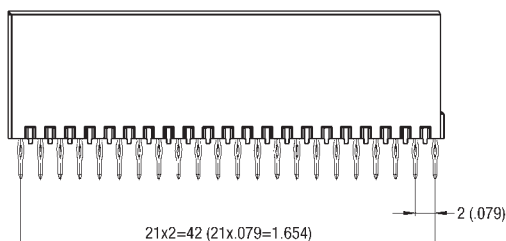

LAYOUT

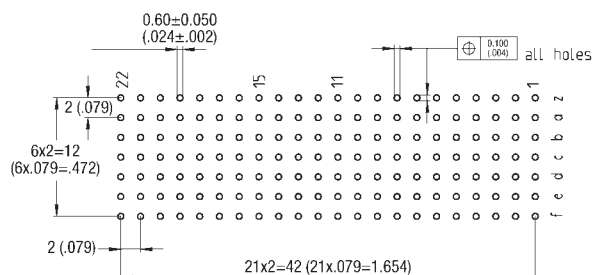

Vertical Male

Style B 22 – 154 Contacts




Pin Loading	Contacts	Performance Class	Part Number
	154	2	17 7200 154 200 002
	154	2	17 7200 154 201 002
P2/ P5 CompactPCI® 	154	2	17 7200 154 202 005
P2/ P5 CompactPCI® 	154	2	17 7200 154 203 005
P2/ P5 CompactPCI® 	154	2	17 7200 154 204 005
	110	2	17 7200 110 200 012
CompactPCI® Computer Telephony 	132	2	17 7200 132 211 002

Technical description and dimensions see page 36

AVX will custom load connectors with any combination of the contacts in the table on page 39. Complete the form on page 57 and fax it to the number shown.




Vertical Male

Series 7200 – Style B 19, 133 Contacts

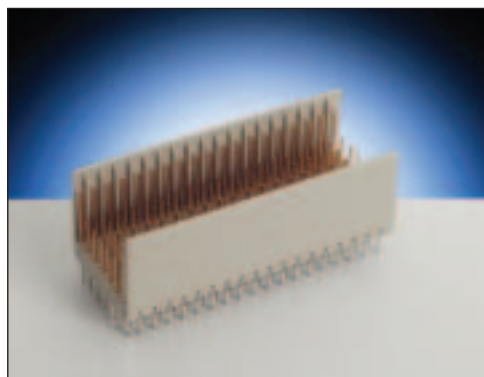


- Up to 95 signal contacts and 38 ground shield contacts in 5 or 5+2 rows of 19 positions
- Designed for gas tight press-fit installations
- This connector fills position P3 of the CompactPCI® specification and should be used with a type A or AB connector
- Twelve different contact styles are available for customizing connector to exact specifications (complete form on page 58)
- This connector also fills position J0 of the VME64 Extension Specification

DIMENSIONS: millimeters (inches)

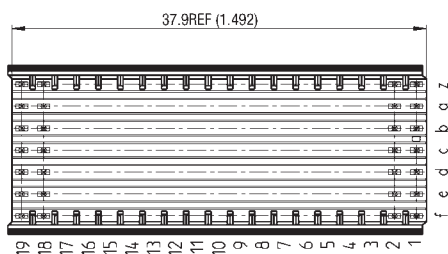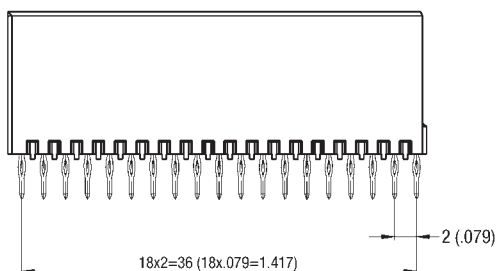

LAYOUT

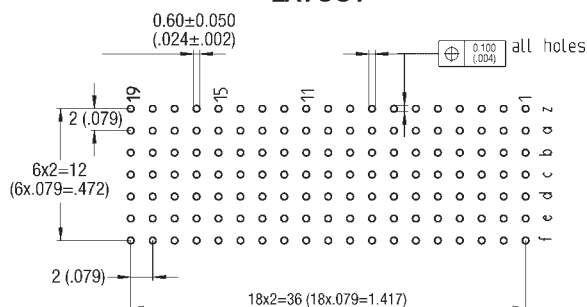

Vertical Male


Style B 19 – 133 Contacts



Pin Loading	Contacts	Performance Class	Part Number
P3 CompactPCI® 	133	2	17 7200 133 300 002
P3 CompactPCI® 	133	2	17 7200 133 301 002
P3 CompactPCI® 	133	2	17 7200 133 302 005
P3 CompactPCI® 	133	2	17 7200 133 303 005
P3 CompactPCI® 	133	2	17 7200 133 304 005
	95	2	17 7200 095 300 012


Technical description and dimensions see page 38

AVX will custom load connectors with any combination of the contacts in the table below. Complete the form on page 57 and fax it to the number shown.

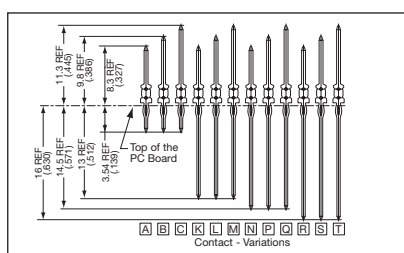




Vertical Male

Series 7200 – Style C 11, 77 Contacts

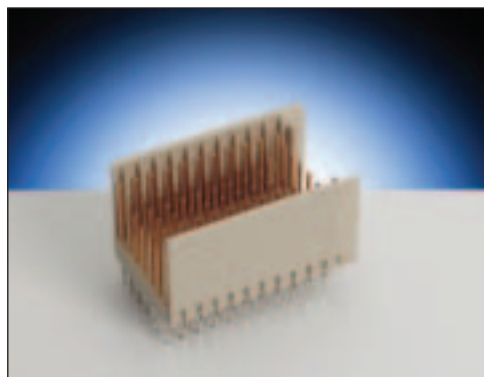


- Up to 55 signal contacts and 22 ground shield contacts in 5 or 5+2 rows of 11 positions
- This connector is designed for end positions only
- Designed for gas tight press-fit installations
- Twelve different contact styles are available for customizing connector to exact specifications (complete form on page 57)
- This connector should be used in conjunction with a Style A or AB connector

DIMENSIONS: millimeters (inches)

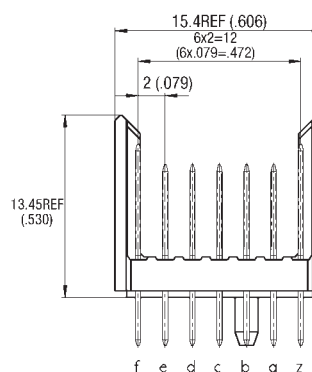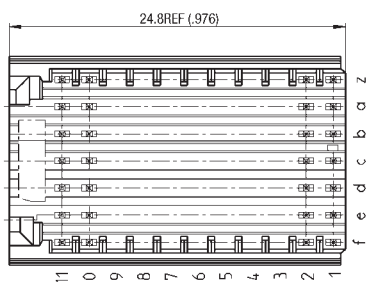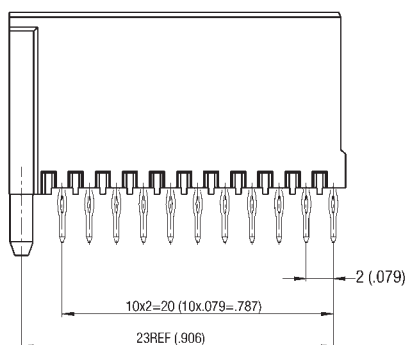

LAYOUT

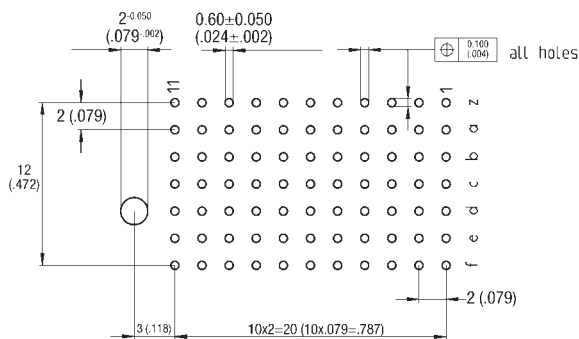

Vertical Male


Style C 11 – 77 Contacts



Pin Loading	Contacts	Performance Class	Part Number																																																																																																
<table><tr><td>11</td><td>10</td><td>9</td><td>8</td><td>7</td><td>6</td><td>5</td><td>4</td><td>3</td><td>2</td><td>1</td><td></td></tr><tr><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>z</td></tr><tr><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>a</td></tr><tr><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>b</td></tr><tr><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>c</td></tr><tr><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>d</td></tr><tr><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>e</td></tr><tr><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>f</td></tr></table>	11	10	9	8	7	6	5	4	3	2	1		C	C	C	C	C	C	C	C	C	C	C	z	A	A	A	A	A	A	A	A	A	A	A	a	A	A	A	A	A	A	A	A	A	A	A	b	A	A	A	A	A	A	A	A	A	A	A	c	A	A	A	A	A	A	A	A	A	A	A	d	A	A	A	A	A	A	A	A	A	A	A	e	C	C	C	C	C	C	C	C	C	C	C	f	77	2	17 7200 077 400 002
11	10	9	8	7	6	5	4	3	2	1																																																																																									
C	C	C	C	C	C	C	C	C	C	C	z																																																																																								
A	A	A	A	A	A	A	A	A	A	A	a																																																																																								
A	A	A	A	A	A	A	A	A	A	A	b																																																																																								
A	A	A	A	A	A	A	A	A	A	A	c																																																																																								
A	A	A	A	A	A	A	A	A	A	A	d																																																																																								
A	A	A	A	A	A	A	A	A	A	A	e																																																																																								
C	C	C	C	C	C	C	C	C	C	C	f																																																																																								
<table><tr><td>11</td><td>10</td><td>9</td><td>8</td><td>7</td><td>6</td><td>5</td><td>4</td><td>3</td><td>2</td><td>1</td><td></td></tr><tr><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>z</td></tr><tr><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>a</td></tr><tr><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>b</td></tr><tr><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>c</td></tr><tr><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>d</td></tr><tr><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>e</td></tr><tr><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>f</td></tr></table>	11	10	9	8	7	6	5	4	3	2	1		C	C	C	C	C	C	C	C	C	C	C	z	B	B	B	B	B	B	B	B	B	B	B	a	B	B	B	B	B	B	B	B	B	B	B	b	B	B	B	B	B	B	B	B	B	B	B	c	B	B	B	B	B	B	B	B	B	B	B	d	B	B	B	B	B	B	B	B	B	B	B	e	C	C	C	C	C	C	C	C	C	C	C	f	77	2	17 7200 077 401 002
11	10	9	8	7	6	5	4	3	2	1																																																																																									
C	C	C	C	C	C	C	C	C	C	C	z																																																																																								
B	B	B	B	B	B	B	B	B	B	B	a																																																																																								
B	B	B	B	B	B	B	B	B	B	B	b																																																																																								
B	B	B	B	B	B	B	B	B	B	B	c																																																																																								
B	B	B	B	B	B	B	B	B	B	B	d																																																																																								
B	B	B	B	B	B	B	B	B	B	B	e																																																																																								
C	C	C	C	C	C	C	C	C	C	C	f																																																																																								
<table><tr><td>11</td><td>10</td><td>9</td><td>8</td><td>7</td><td>6</td><td>5</td><td>4</td><td>3</td><td>2</td><td>1</td><td></td></tr><tr><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>z</td></tr><tr><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>a</td></tr><tr><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>b</td></tr><tr><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>c</td></tr><tr><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>d</td></tr><tr><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>P</td><td>e</td></tr><tr><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>f</td></tr></table>	11	10	9	8	7	6	5	4	3	2	1		T	T	T	T	T	T	T	T	T	T	T	z	P	P	P	P	P	P	P	P	P	P	P	a	P	P	P	P	P	P	P	P	P	P	P	b	P	P	P	P	P	P	P	P	P	P	P	c	P	P	P	P	P	P	P	P	P	P	P	d	P	P	P	P	P	P	P	P	P	P	P	e	T	T	T	T	T	T	T	T	T	T	T	f	77	2	17 7200 077 402 005
11	10	9	8	7	6	5	4	3	2	1																																																																																									
T	T	T	T	T	T	T	T	T	T	T	z																																																																																								
P	P	P	P	P	P	P	P	P	P	P	a																																																																																								
P	P	P	P	P	P	P	P	P	P	P	b																																																																																								
P	P	P	P	P	P	P	P	P	P	P	c																																																																																								
P	P	P	P	P	P	P	P	P	P	P	d																																																																																								
P	P	P	P	P	P	P	P	P	P	P	e																																																																																								
T	T	T	T	T	T	T	T	T	T	T	f																																																																																								
<table><tr><td>11</td><td>10</td><td>9</td><td>8</td><td>7</td><td>6</td><td>5</td><td>4</td><td>3</td><td>2</td><td>1</td><td></td></tr><tr><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>z</td></tr><tr><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>a</td></tr><tr><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>b</td></tr><tr><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>c</td></tr><tr><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>d</td></tr><tr><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>R</td><td>e</td></tr><tr><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>f</td></tr></table>	11	10	9	8	7	6	5	4	3	2	1		T	T	T	T	T	T	T	T	T	T	T	z	R	R	R	R	R	R	R	R	R	R	R	a	R	R	R	R	R	R	R	R	R	R	R	b	R	R	R	R	R	R	R	R	R	R	R	c	R	R	R	R	R	R	R	R	R	R	R	d	R	R	R	R	R	R	R	R	R	R	R	e	T	T	T	T	T	T	T	T	T	T	T	f	77	2	17 7200 077 403 005
11	10	9	8	7	6	5	4	3	2	1																																																																																									
T	T	T	T	T	T	T	T	T	T	T	z																																																																																								
R	R	R	R	R	R	R	R	R	R	R	a																																																																																								
R	R	R	R	R	R	R	R	R	R	R	b																																																																																								
R	R	R	R	R	R	R	R	R	R	R	c																																																																																								
R	R	R	R	R	R	R	R	R	R	R	d																																																																																								
R	R	R	R	R	R	R	R	R	R	R	e																																																																																								
T	T	T	T	T	T	T	T	T	T	T	f																																																																																								
<table><tr><td>11</td><td>10</td><td>9</td><td>8</td><td>7</td><td>6</td><td>5</td><td>4</td><td>3</td><td>2</td><td>1</td><td></td></tr><tr><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>z</td></tr><tr><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>a</td></tr><tr><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>b</td></tr><tr><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>c</td></tr><tr><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>d</td></tr><tr><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>K</td><td>e</td></tr><tr><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>T</td><td>f</td></tr></table>	11	10	9	8	7	6	5	4	3	2	1		T	T	T	T	T	T	T	T	T	T	T	z	K	K	K	K	K	K	K	K	K	K	K	a	K	K	K	K	K	K	K	K	K	K	K	b	K	K	K	K	K	K	K	K	K	K	K	c	K	K	K	K	K	K	K	K	K	K	K	d	K	K	K	K	K	K	K	K	K	K	K	e	T	T	T	T	T	T	T	T	T	T	T	f	77	2	17 7200 077 404 005
11	10	9	8	7	6	5	4	3	2	1																																																																																									
T	T	T	T	T	T	T	T	T	T	T	z																																																																																								
K	K	K	K	K	K	K	K	K	K	K	a																																																																																								
K	K	K	K	K	K	K	K	K	K	K	b																																																																																								
K	K	K	K	K	K	K	K	K	K	K	c																																																																																								
K	K	K	K	K	K	K	K	K	K	K	d																																																																																								
K	K	K	K	K	K	K	K	K	K	K	e																																																																																								
T	T	T	T	T	T	T	T	T	T	T	f																																																																																								
<table><tr><td>11</td><td>10</td><td>9</td><td>8</td><td>7</td><td>6</td><td>5</td><td>4</td><td>3</td><td>2</td><td>1</td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>z</td></tr><tr><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>a</td></tr><tr><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>b</td></tr><tr><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>c</td></tr><tr><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>d</td></tr><tr><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>e</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>f</td></tr></table>	11	10	9	8	7	6	5	4	3	2	1													z	B	B	B	B	B	B	B	B	B	B	B	a	B	B	B	B	B	B	B	B	B	B	B	b	B	B	B	B	B	B	B	B	B	B	B	c	B	B	B	B	B	B	B	B	B	B	B	d	B	B	B	B	B	B	B	B	B	B	B	e												f	55	2	17 7200 055 401 012
11	10	9	8	7	6	5	4	3	2	1																																																																																									
											z																																																																																								
B	B	B	B	B	B	B	B	B	B	B	a																																																																																								
B	B	B	B	B	B	B	B	B	B	B	b																																																																																								
B	B	B	B	B	B	B	B	B	B	B	c																																																																																								
B	B	B	B	B	B	B	B	B	B	B	d																																																																																								
B	B	B	B	B	B	B	B	B	B	B	e																																																																																								
											f																																																																																								


Technical description and dimensions see page 40

AVX will custom load connectors with any combination of the contacts in the table below. Complete the form on page 57 and fax it to the number shown.

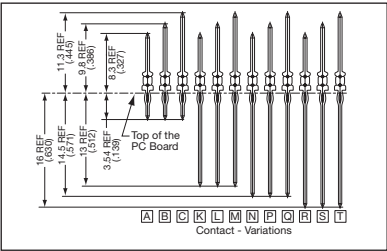

Type D Vertical Male for Backplanes

Series 8077


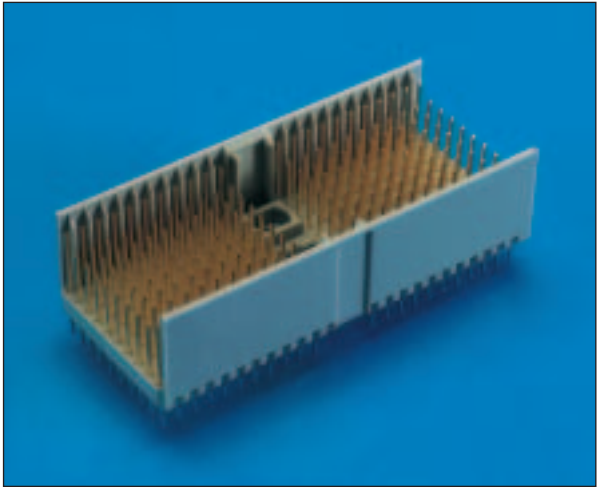


- 176 signal contacts plus 44 ground shield contacts in 8+2 x 25 position configuration
- Center cavity with keying option (uses 3 positions)
- Prealignment guides
- Designed for gas tight press-fit installation
- See pages 52 and 53 for keying options
- This connector can be used by itself or in conjunction with Style E or F connectors
- Twelve different contact styles available for customizing connector to exact specifications (see page 58)





17 8077 220 501 XXX = 176 signal contacts and 44 ground contacts, Short Tail, L2,3
17 8077 176 503 XXX = 176 signal contacts, no ground contacts, Short Tail, L2

XXX =


Plating Code	Contact Area	Press-fit Area	Under Coat
833	0.1µm min. Au.65µm Pd/Ni	1.5-3.0µm Solder	Nickel 1.2-3.0µm
863	0.76µm min. Au	1.5-3.0µm Solder	Nickel 1.2-3.0µm

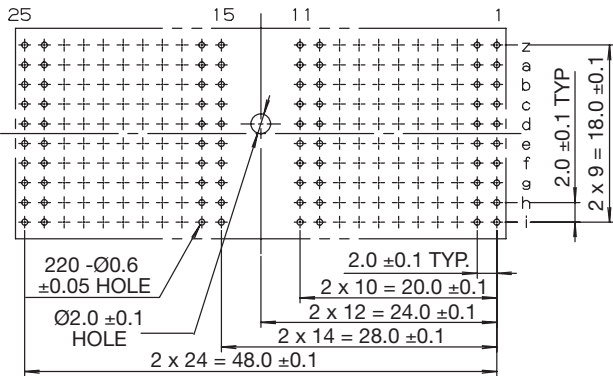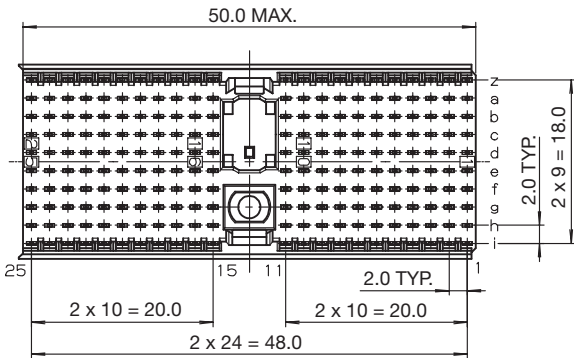

RECOMMENDED P.C. BOARD LAYOUT
(COMPONENT SIDE)

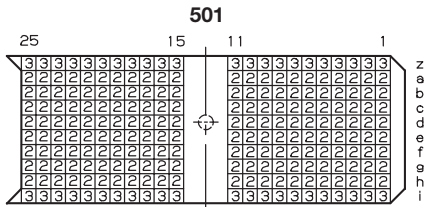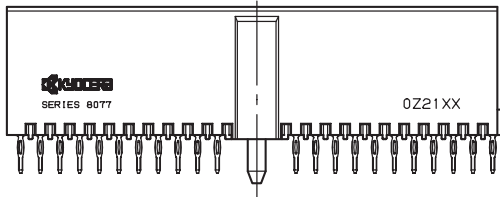


CONTACT DETAIL

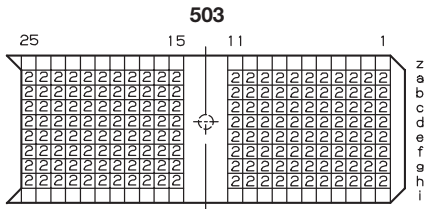

Type E Vertical Male for Backplanes

Series 8077

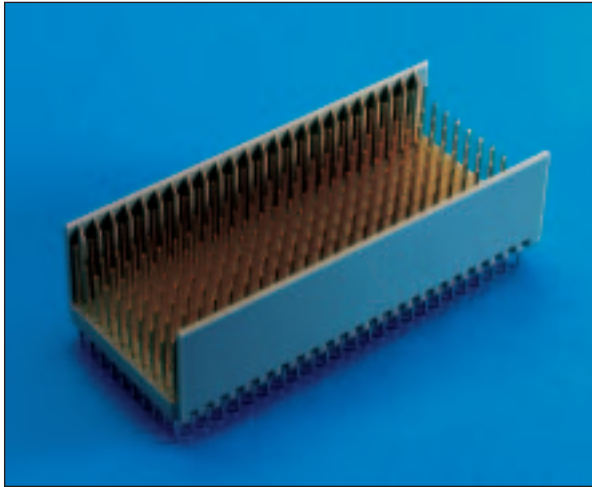





- 250 signal contacts and 50 ground shield contacts in 8+2 x 25 position configuration
- Designed for gas tight press-fit installation
- This connector should be used in conjunction with a Type D style to ensure proper mating alignment
- Twelve different contact styles are available for customizing connector to exact specifications (see page 58)

17 8077 250 502 XXX = 250 signal contacts and 50 ground contacts, Short Tail, L2,3



17 8077 200 504 XXX = 250 signal contacts, no ground contacts, Short Tail, L2

XXX =

Plating Code	Contact Area	Press-fit Area	Under Coat
833	0.1µm min. Au.65µm Pd/Ni	1.5-3.0µm Solder	Nickel 1.2-3.0µm
863	0.76µm min. Au	1.5-3.0µm Solder	Nickel 1.2-3.0µm

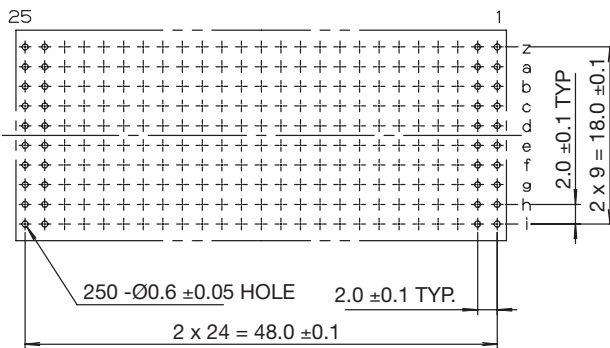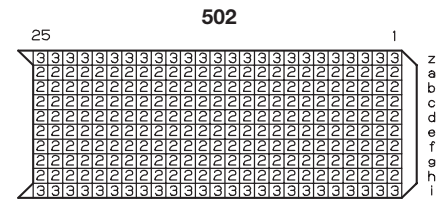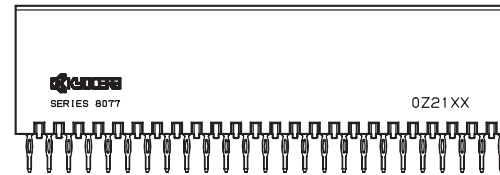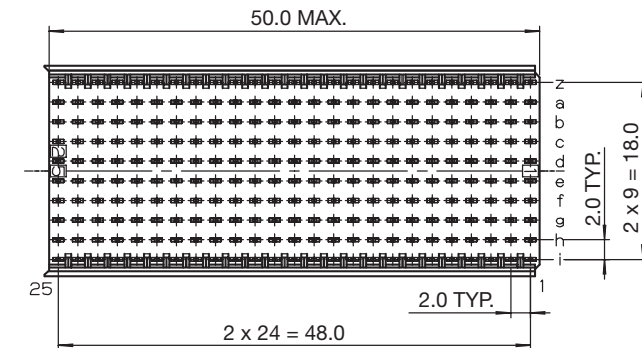

RECOMMENDED P.C. BOARD LAYOUT
(COMPONENT SIDE)



CONTACT DETAIL

Type L Vertical Male for Backplanes




Series 8074



- 6 power or coax contact cavities
- Center cavity with prealignment guides and keying option
- See pages 52 and 53 for keying options
- Supplied with locating pegs for secure P.C. board mounting
- This connector can be used by itself or in conjunction with B, C, or M connectors
- Power and coax contacts are ordered separately
- See pages 54 and 55 for available contacts


61 8074 006 001 007 = Type L 6 position power connector with polarizing key, (housing only)

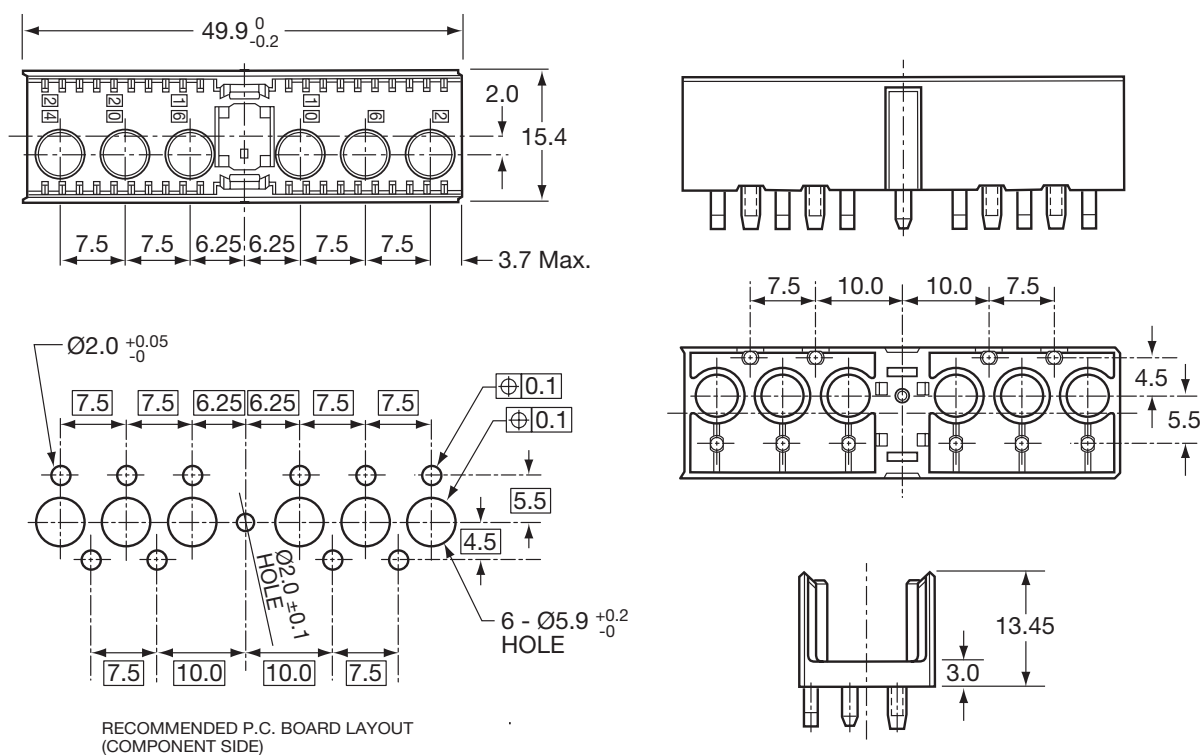

Type M Vertical Male Feed-To for Backplanes





Series 8075

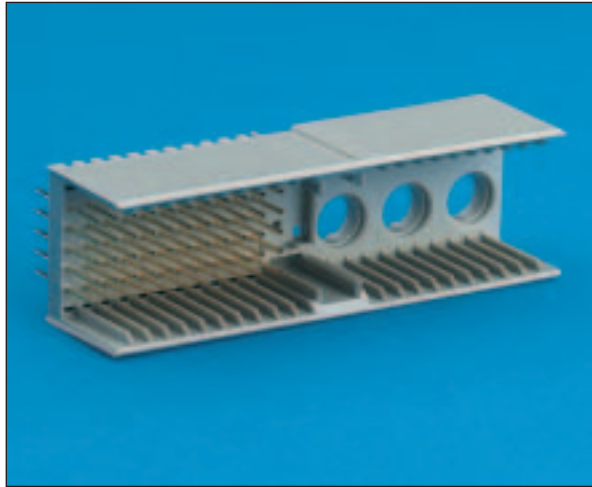



- 3 power contact cavities
- 55 signal contacts
- Center cavity with prealignment guides and keying option
- See pages 52 and 53 for keying options
- Designed for gas tight press-fit installation
- Supplied with locating pegs for secure P.C. board mounting
- Power and coax contacts are ordered separately
- See pages 54 and 55 for available contacts
- Twelve different signal contact styles are available for customizing connector to exact specifications (see page 58)

17 8075 355 501 863 = Type M 3 position power connector with polarizing key, with 55 signal contacts, L1


Plating Code	Contact Area	Press-fit Area	Under Coat
863	0.76µm min. Au	1.5-3.0µm Solder	Nickel 1.2-3.0µm

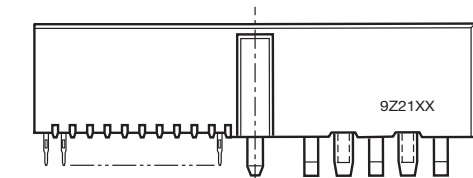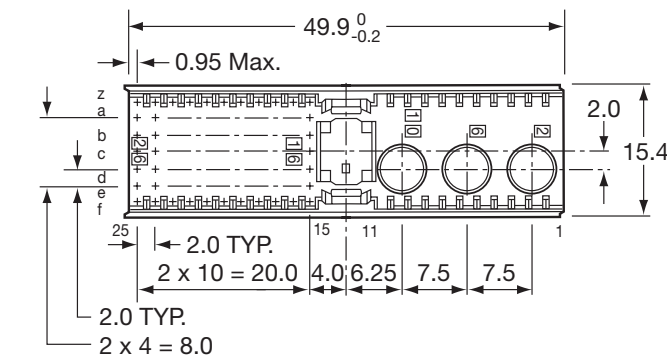

CONTACT LAYOUT
(CONNECTOR MATING SIDE SHOWN)

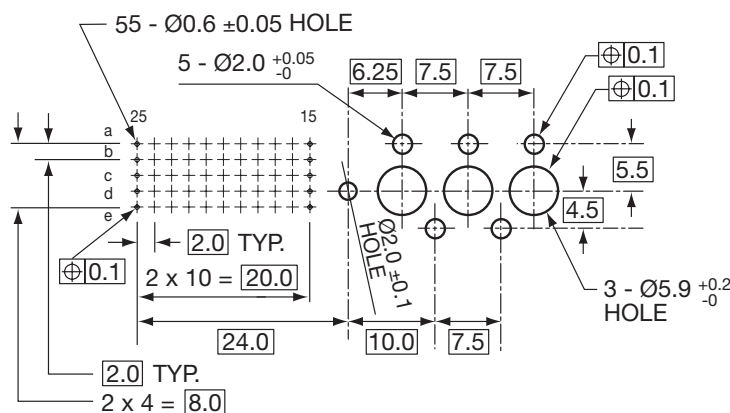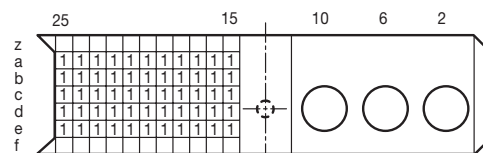


RECOMMENDED P.C. BOARD LAYOUT
(COMPONENT SIDE)

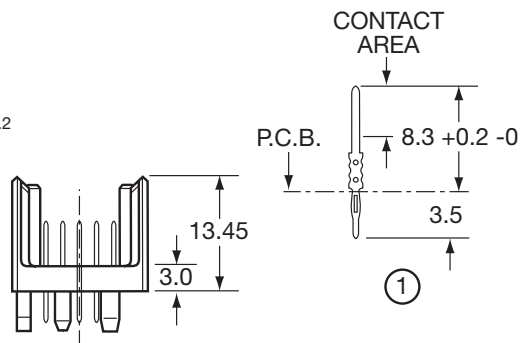

Type A Right Angle Male for Daughter Cards





Series 8072

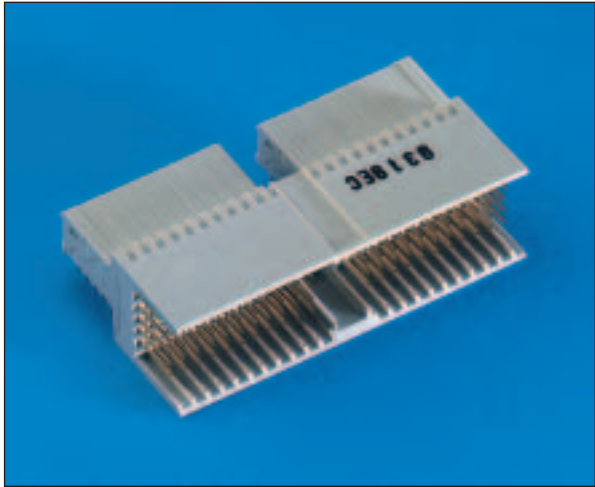

- 110 signal contacts
- Designed for gas tight press-fit installation
- Center cavity with prealignment guides and keying option (uses 3 positions)
- This connector can be used by itself or in conjunction with Style B or C connectors
- See pages 52 and 53 for keying options
- Daughter card applications

17 8072 110 001 863 = Type A Right Angle Male

Plating Code	Contact Area	Press-fit Area	Under Coat
863	0.76µm min. Au	1.5-3.0µm Solder	Nickel 1.2-3.0µm

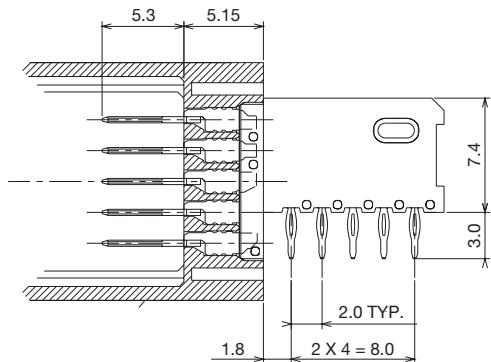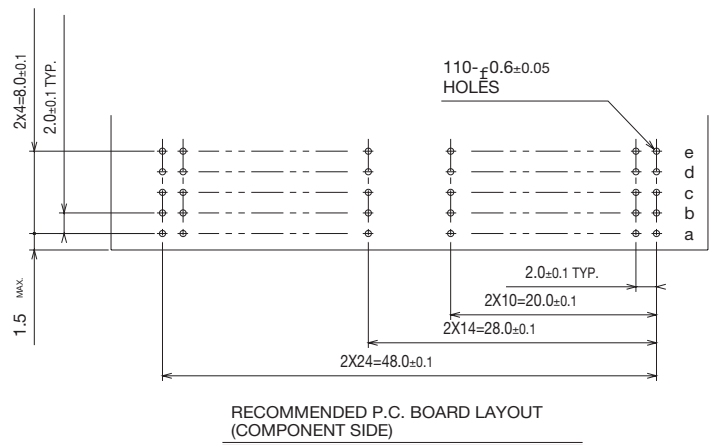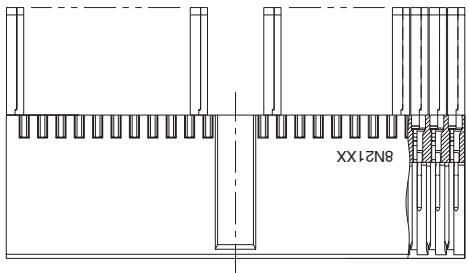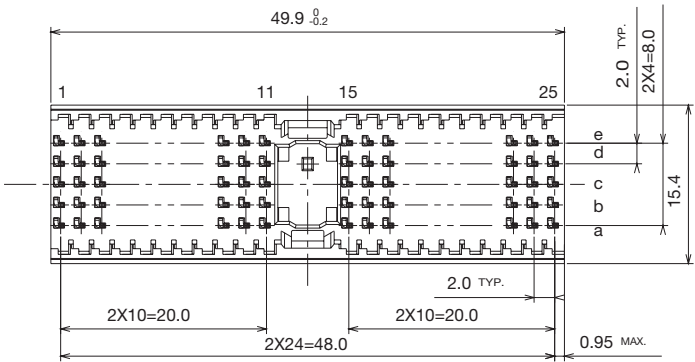

Type B Right Angle Male for Daughter Cards


Series 8072





- 95, 110, 125 signal contacts
- Designed for gas tight press-fit installation
- This connector should be used in conjunction with a Type A style to ensure proper alignment
- Daughter card applications

17 8072 095 000 863 = Type B 19 Right Angle Male, 5x19 Positions
17 8072 110 000 863 = Type B 22 Right Angle Male, 5x22 Positions
17 8072 125 000 863 = Type B 25 Right Angle Male, 5x25 Positions

Plating Code	Contact Area	Press-fit Area	Under Coat
863	0.76µm min. Au	1.5-3.0µm Solder	Nickel 1.2-3.0µm

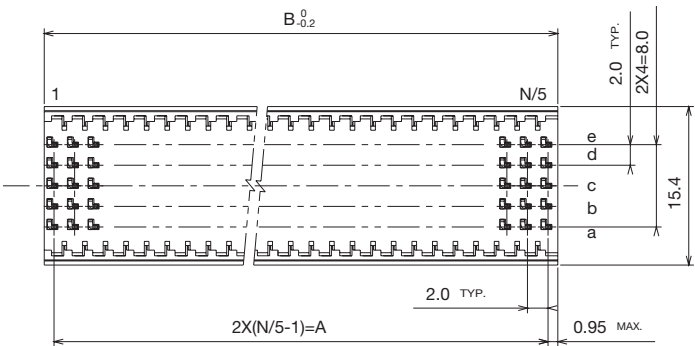

P/N	A	B
17 8072 095 000 863	36.0	37.9
17 8072 110 000 863	42.0	43.9
17 8072 125 000 863	48.0	49.9

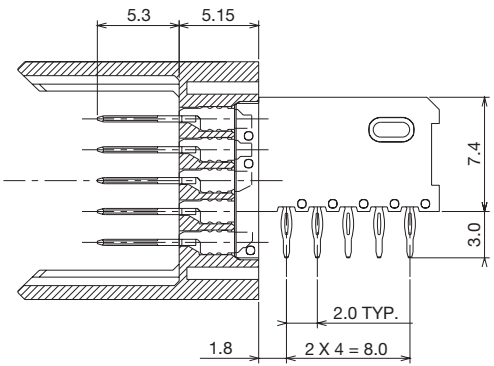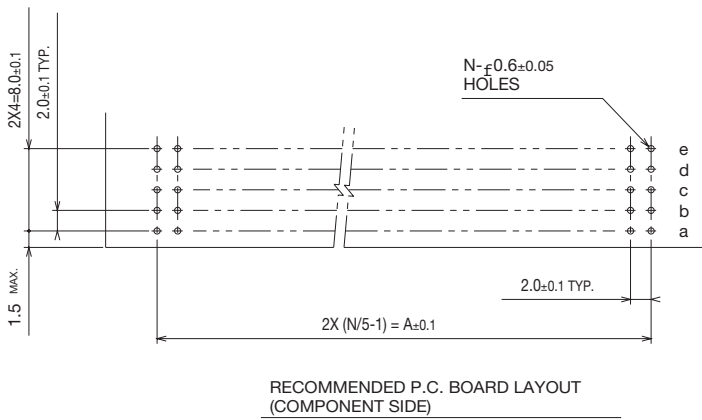

Type C Right Angle Male for Daughter Cards




Series 8072



- 55 signal contacts in a 5 x 11 position configuration
- Prealignment guide
- Designed for gas tight press-fit installation
- This connector should be used in conjunction with Style A & B connectors
- Used for end position only

17 8072 055 001 863 = 55 signal contacts

Plating Code	Contact Area	Press-fit Area	Under Coat
863	0.76µm min. Au	1.5-3.0µm Solder	Nickel 1.2-3.0µm

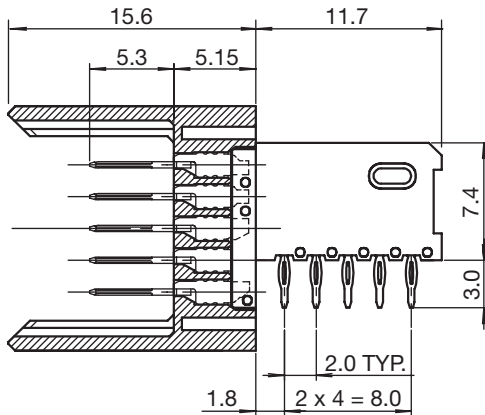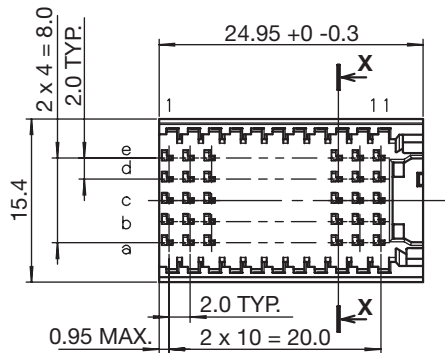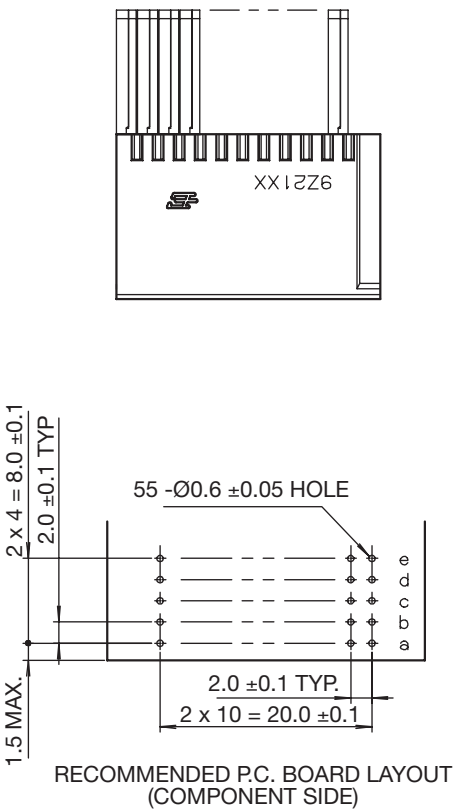

Press-fit Tools

Series 7200




AVX 2mm Hard Metric right angle female connectors are designed to be assembled to the board without the need for a special press-fit tool. These connectors can be installed using the “flat rock” method. The AVX modular tool system for 2mm Hard Metric vertical headers can be grouped to

allow for multiple press-fit operations. This makes it possible to install several connectors in a row, with one press operation. The grooves on the sides of the tools allow for easy installation into an assembly press.


PART NUMBER SYSTEM (VERTICAL MALE CONNECTORS)

Part Number	Size	Pins	“n”	Dim. “Y”	Dim. “X”
06 7200 0201 00 000	B25	175	25	48.00	50.00
06 7200 0202 00 000	A	154	22	48.00	50.00
06 7200 0203 00 000	B22	154	22	42.00	44.00
06 7200 0204 00 000	B19	133	19	36.00	38.00
06 7200 0205 00 000	C11	77	11	20.00	22.00


06 7200 0203 00 000
Type B22 (7 x 22)
154 Pins




06 7200 0204 00 000
Type B19 (7 x 19)
133 Pins




06 7200 0205 00 000
Type C (7 x 11)
77 Pins



06 7200 0202 00 000
Type A (7 x 22)
154 Pins with Coding

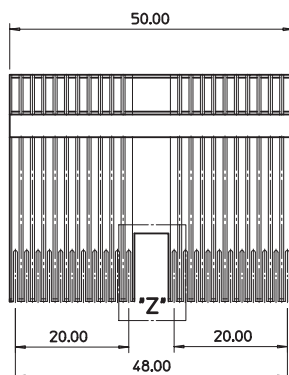

06 7200 0201 00 000
Type B25 (7 x 25)
175 Pins



Shroud

Type B for Midplane and Rear I/O Assemblies

Series 7200


- Use in conjunction with feedthru connectors
- When installed over the long tails, a male connector is created
- Enables rear Input/Output or midplane applications with daughter cards or cable assemblies
- No spacer required
- 3 heights available to accommodate different board thicknesses
- Other versions available upon request

67 7200 6124 00 000 = B 175 cavities (25 position) L=3.9mm; H=14.35mm; PCB Thickness 4.0mm

67 7200 6164 00 000 = B 175 cavities (25 position) L=4.7mm; H=15.15mm; PCB Thickness 3.2mm

67 7200 6184 00 000 = B 175 cavities (25 position) L=5.3mm; H=15.75mm; PCB Thickness 2.4mm

67 7200 6194 00 000 = B 175 cavities (25 position) L=6.1mm; H=16.55mm; PCB Thickness 1.6mm

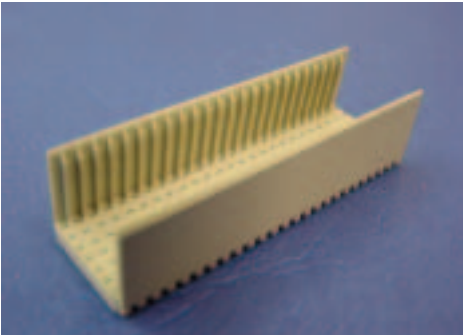


67 7200 6224 00 000 = B 154 cavities (22 position) L=3.9mm; H=14.35mm; PCB Thickness 4.0mm

67 7200 6264 00 000 = B 154 cavities (22 position) L=4.7mm; H=15.15mm; PCB Thickness 3.2mm

67 7200 6284 00 000 = B 154 cavities (22 position) L=5.3mm; H=15.75mm; PCB Thickness 2.4mm

67 7200 6294 00 000 = B 154 cavities (22 position) L=6.1mm; H=16.55mm; PCB Thickness 1.6mm


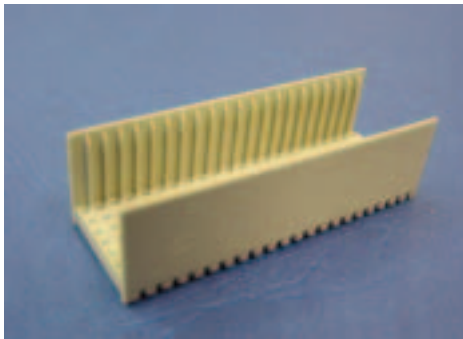


67 7200 6324 00 000 = B 133 cavities (19 position) L=3.9mm; H=14.35mm; PCB Thickness 4.0mm

67 7200 6364 00 000 = B 133 cavities (19 position) L=4.7mm; H=15.15mm; PCB Thickness 3.2mm

67 7200 6384 00 000 = B 133 cavities (19 position) L=5.3mm; H=15.75mm; PCB Thickness 2.4mm

67 7200 6394 00 000 = B 133 cavities (19 position) L=6.1mm; H=16.55mm; PCB Thickness 1.6mm

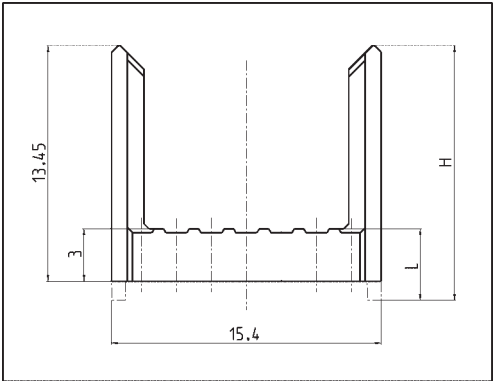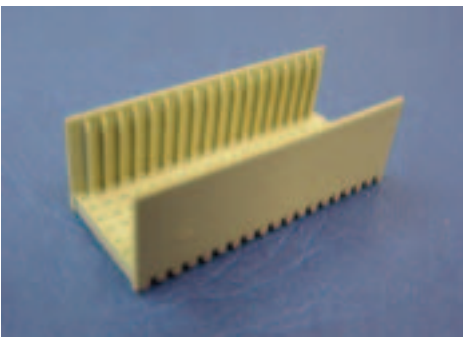

Shroud

Type A and C for Midplane and Rear I/O Assemblies Series 7200




- Used in conjunction with feedthru connectors
- When installed over the long tails, a male connector is created
- Used in conjunction with feedthru connectors
- When installed over the long tails, a male connector is created
- Enables rear Input/Output or midplane applications with daughter cards or cable assemblies
- No spacer required
- 3 heights available to accommodate different board thicknesses
- Other versions available upon request

67 7200 6024 00 000 = P1, P4 Type A 154 cavities (22 position)
L=3.9mm; H=14.35mm; PCB Thickness 4.0mm

67 7200 6064 00 000 = P1, P4 Type A 154 cavities (22 position)
L=4.7mm; H=15.15mm; PCB Thickness 3.2mm

67 7200 6084 00 000 = P1, P4 Type A 154 cavities (22 position)
L=5.3mm; H=15.75mm; PCB Thickness 2.4mm

67 7200 6094 00 000 = P1, P4 Type A 154 cavities (22 position)
L=6.1mm; H=16.55mm; PCB Thickness 1.6mm


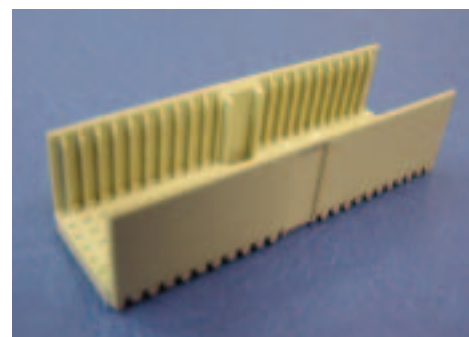


67 7200 6424 00 000 = Type C 77 cavities (11 position) L=3.9mm;
H=14.35mm; PCB Thickness 4.0mm

67 7200 6464 00 000 = Type C 77 cavities (11 position)
L=4.7mm; H=15.15mm; PCB Thickness 3.2mm

67 7200 6484 00 000 = Type C 77 cavities (11 position)
L=5.3mm; H=15.75mm; PCB Thickness 2.4mm

67 7200 6494 00 000 = Type C 77 cavities (11 position)
L=6.1mm; H=16.55mm; PCB Thickness 1.6mm

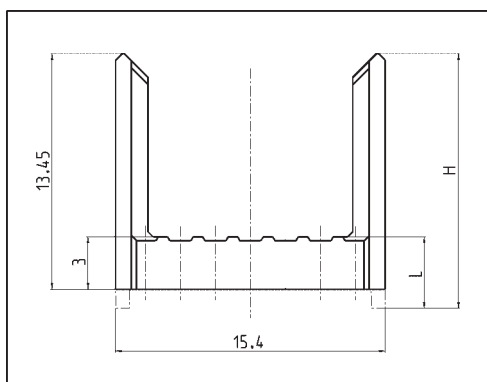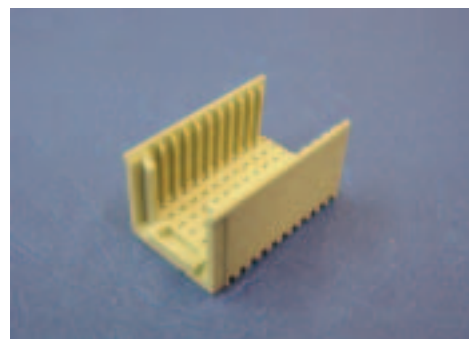

Coding Keys

Type A Male (Backplane) Type A Female (Daughter Card)

CompactPCI® supports two types of voltages (3.3V and 5.0V). Coding keys are used to prevent damage by inserting the wrong boards into a system. Keys are snapped into the center polarization cavity. 3.3V cards are coded cadmium yellow and 5.0V are brilliant blue.

In total there are 70 different codings available which can be used in conjunction with the CompactPCI® specification or upon customer's requirement.




MALE

Cadmium	Brilliant	Pastel	Strawberry
Yellow	Blue	Orange	Red

FEMALE

Cadmium	Brilliant	Pastel	Strawberry
Yellow	Blue	Orange	Red

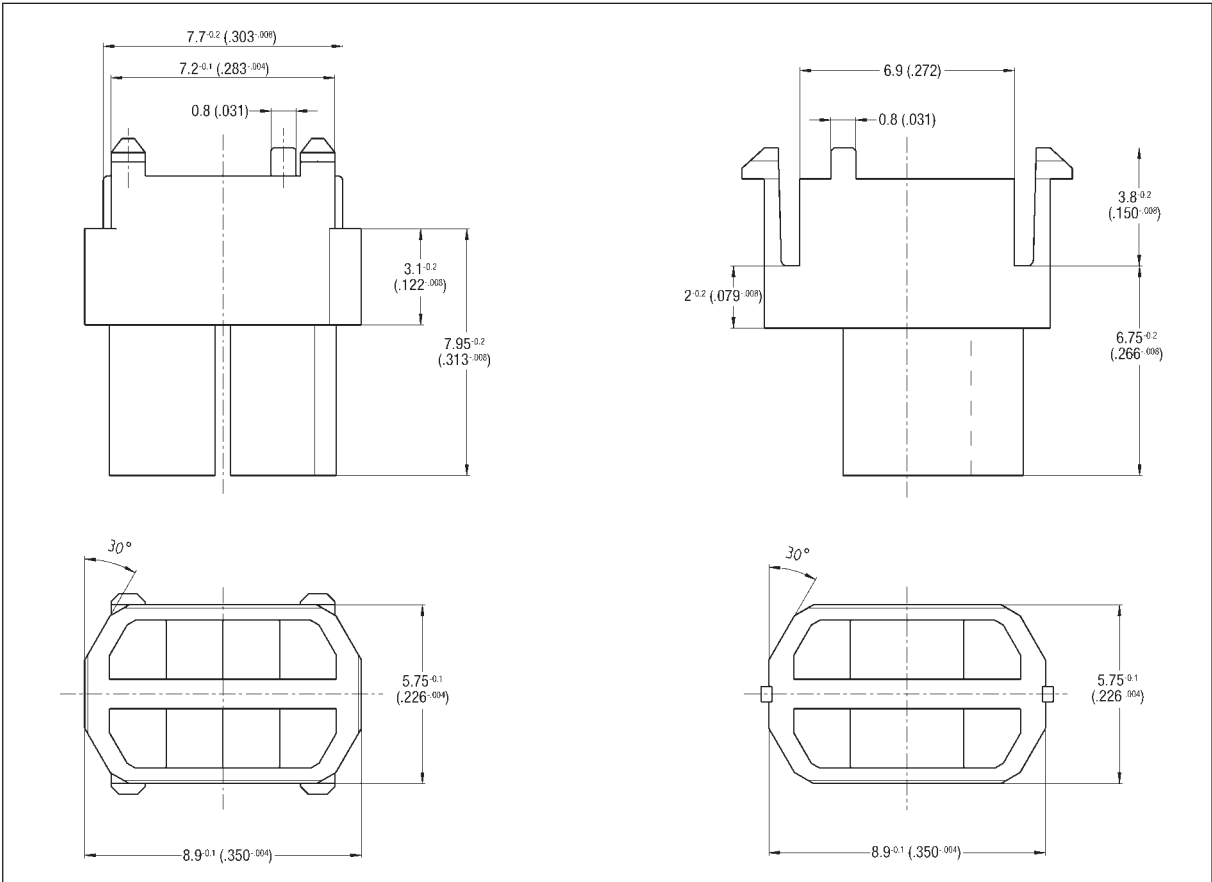

Coding Keys

Type A Male (Backplane)

Type A Female (Daughter Card)





MALE			FEMALE		
Coding Key	Color	Part Number	Coding Key	Color	Part Number
	Nut brown RAL 8011	67 7200 7014 01236		Nut brown RAL 8011	67 7200 7114 04578
	Strawberry Red Computer Telephony Spec. RAL 3018	67 7200 7014 01248		Strawberry Red Computer Telephony Spec. RAL 3018	67 7200 7114 03567
	Blue Lilac RAL 4005	67 7200 7014 01256		Blue Lilac RAL 4005	67 7200 7114 02478
	Brilliant Blue 5.0 V C-PCI RAL 5007	67 7200 7014 01567		Brilliant Blue 5.0 V C-PCI RAL 5007	67 7200 7114 02348
	Reseda Green RAL 6011	67 7200 7014 02578		Reseda Green RAL 6011	67 7200 7114 01346
	Cadmium Yellow 3.3 V C-CPI RAL 1021	67 7200 7014 03456		Cadmium Yellow 3.3 V C-CPI RAL 1021	67 7200 7114 01278
	Slate Grey RAL 7015	67 7200 7014 03467		Slate Grey RAL 7015	67 7200 7114 01258
	Steel Blue RAL 5011	67 7200 7014 03478		Steel Blue RAL 5011	67 7200 7114 01256
	Pastel Orange RAL 2003	67 7200 7014 03568		Pastel Orange RAL 2003	67 7200 7114 01247
	Ocher Yellow RAL 1024	67 7200 7014 04678		Ocher Yellow RAL 1024	67 7200 7114 01235

High Power Contacts for L and M Connectors






Series 8489

HIGH POWER PLUG CONTACT FOR PLUG SERIES 8074/8075

Variation	Termination	ØA*	Performance	Ordering Code
	SOLDER	.189 (4.80)	40 Ampere max.	60 8489 040 001 049
	SOLDER	.138 (3.50)	30 Ampere max.	60 8489 040 002 049
	SOLDER	.110 (2.80)	20 Ampere max.	60 8489 040 003 049
	SOLDER	.067 (1.70)	10 Ampere max.	60 8489 040 004 049
	CRIMP	.189 (4.80)	40 Ampere max.	60 8489 040 005 049
	CRIMP	.138 (3.50)	30 Ampere max.	60 8489 040 006 049
	CRIMP	.110 (2.80)	20 Ampere max.	60 8489 040 007 049
	CRIMP	.067 (1.70)	10 Ampere max.	60 8489 040 008 049


HIGH POWER RECEPTACLE CONTACT FOR RECEPTACLE SERIES 8074/8075

Variation	Termination	ØA*	Performance	Ordering Code
	P.C.	Contact	40 Ampere max.	60 8489 050 009 049
	SOLDER	.189 (4.80)	40 Ampere max.	60 8489 050 001 049
	SOLDER	.138 (3.50)	30 Ampere max.	60 8489 050 002 049
	SOLDER	.110 (2.80)	20 Ampere max.	60 8489 050 003 049
	SOLDER	.067 (1.70)	10 Ampere max.	60 8489 050 004 049
	CRIMP	.189 (4.80)	40 Ampere max.	60 8489 050 005 049
	CRIMP	.138 (3.50)	30 Ampere max.	60 8489 050 006 049
	CRIMP	.110 (2.80)	20 Ampere max.	60 8489 050 007 049
	CRIMP	.067 (1.70)	10 Ampere max.	60 8489 050 008 049

CRIMPING PLIER FOR HIGH POWER CONTACTS


Part Number

06 8489 001 010 0007

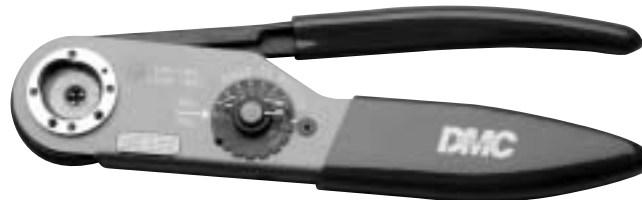

EXTRACTION TOOL FOR ALL CONTACT TYPES

Part Number	Length
06 8489 001 001 000	2.755 (70.00)
06 8489 001 002 000	7.874 (200.00)
66 8489 001 003 000	Replacement tip

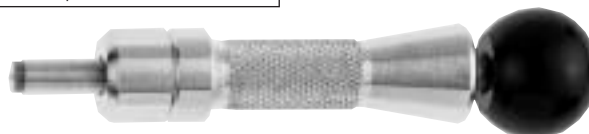



Coax Contacts for L and M Connectors



Series 8489




COAX PLUG CONTACT FOR SERIES 8074/8075

Dimensions: mm/inches

Variation	Termination		Dimensions			Wire Type	Order Code
	Outer Conductor	Inner Conductor	ØA	ØB	ØC		
	CRIMP	SOLDER	1.05/0.041	1.70/0.067	2.25/0.089	RG 196, 178	60 8489 020 001 049
	CRIMP	SOLDER	1.70/0.067	2.70/0.106	3.20/0.126	RG 179, 316 (single), RG 187	60 8489 020 002 049
	CRIMP	SOLDER	1.70/0.067	2.70/0.106	3.58/0.141	RG 316 (braided), RG 187 (double)	60 8489 020 003 049
	SOLDER	SOLDER	1.30/0.051	1.90/0.075	2.20/0.087	RG 178	60 8489 020 004 049
	SOLDER	SOLDER	2.25/0.089	2.90/0.114	3.20/0.126	RG 179	60 8489 020 005 049

COAX RECEPTACLE CONTACT FOR SERIES 8074/8075

Dimensions: mm/inches

Variation	Termination		Dimensions			Wire Type	Order Code
	Outer Conductor	Inner Conductor	ØA	ØB	ØC		
	CRIMP	SOLDER	1.70/0.067	2.70/0.106	3.55/0.140	RG 187	60 8489 030 001 049
	CRIMP	SOLDER	1.70/0.067	2.70/0.106	3.20/0.126	RG 316, RG 179, RG 188, RG 174	60 8489 030 002 049
	CRIMP	SOLDER	1.05/0.041	1.70/0.067	2.25/0.089	RG 178	60 8489 030 003 049
	SOLDER	SOLDER	2.25/0.089	2.90/0.114	3.20/0.126	RG 179	60 8489 030 004 049
	SOLDER	SOLDER	1.30/0.051	1.90/0.075	2.20/0.087	RG 178	60 8489 030 005 049
	P.C.	P.C.					60 8489 030 008 049

CRIMPING PLIER FOR COAX CONTACTS (WITHOUT CRIMPING INSERTS)

Part Number

36 8489 001 020 001



CRIMPING INSERTS

Part Number	Cable Type
66 8489 00 102 1 000	RG 196 A/U RG 178 B/U
66 8489 00 102 2 000	RG 188 A/U RG 174 A/U RG 316 /U RG 179 B/U RG 187 A/U
66 8489 00 102 3 000	RG 316 /U

Special Contacts for L and M Connectors



TECHNICAL DATA

	Coaxial Contacts	High Current Contacts
Contact Material	copper alloy	copper alloy
Contact Plating	gold over nickel	gold over nickel
Performance Class	1 - 500 mating cycles	1 - 500 mating cycles
Insulator Material	PTFE	
Temperature Range	-55°C ~ +125°C	-55°C ~ +125°C
Maximum Current	0.5 ampere	10, 20, 30, 40 ampere
Operating Voltage	250 V eff.	
Peak Voltage	750 V eff.	
Contact Resistance	3 Mohm max. (1) 10 Mohm max. (2)	< 1 Mohm max.
Insulation Resistance	10,000,000 Mohm	
Insertion Force (max.)	10 N	10 N
Retention Force (min.)	0.9 N	1.6 N
Characteristic Impedance	50 Ohm	
Working Frequency	ca. 30 GHz max. 0-10 GHz opt.	
Reflection Coefficient	max. 0.05 to 1 GHz max. 0.07 to 4 GHz max. 0.1 to 10 GHz	

(1) Outer Conductor

(2) Inner Conductor

Connectors Type A, B, C

2mm Hard-Metric Custom Design Worksheet

Series 7200



Fax To: AVX Connectors

North America: Fax: 843-444-2814
Tel: 843-946-0634

Europe: Fax: ++49 2741 299 122
Tel: ++49 2741 299-0

Asia-Pacific: Fax: (65) 350-4880
Tel: (65) 258-2833

Name _____ Title _____

Company _____ email _____

Address _____

City _____ State _____ Zip _____

Telephone _____ Fax _____

For special loading configuration for your application, use this form. Select the grid diagram that applies to the type connector style you need. Fill in each block with the pin style (from the table) that you need. Please leave unloaded positions or rows blank.

TYPE A


25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	
																									z
																									a
																									b
																									c
																									d
																									e
																									f

TYPE B

25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	
																									z
																									a
																									b
																									c
																									d
																									e
																									f

TYPE C

11	10	9	8	7	6	5	4	3	2	1	
											z
											a
											b
											c
											d
											e
											f

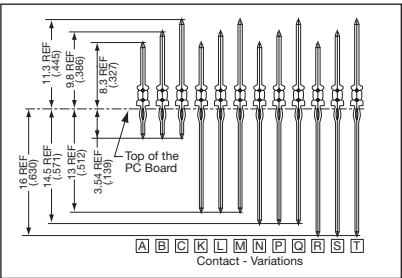

Mylar strip: ☐ Yes
☐ No

Lubrication: ☐ Yes
☐ No

Plating Class: ☐ I 1.27 Gold/Gold
☐ I 1.27 Gold/Tin
☐ II 0.80 Gold/Gold
☐ II 0.80 Gold/Tin
☐ Gold all over

Date: _____

P/N assigned: _____

EAU: _____

Connectors Type D, E, F

2mm Hard-Metric Custom Design Worksheet

Series 8075/8077



Fax To: AVX Connectors

North America: Fax: 843-444-2814
Tel: 843-946-0634

Europe: Fax: ++44 (0)1252 770001
Tel: ++44 (0)1252 770000

Asia-Pacific: Fax: (65) 350-4880
Tel: (65) 258-2833

Name _____ Title _____

Company _____ email _____


Address _____

City _____ State _____ Zip _____


Telephone _____ Fax _____

For special loading configuration for your application, use this form. Select the grid diagram that applies to the type connector style you need. Fill in each block with the pin style (from the table) that you need. Please leave unloaded positions or rows blank.


TYPE D

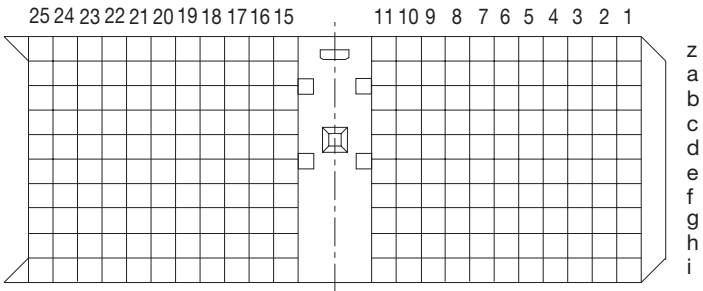


TYPE AB (7 ROW) TYPE E (10 ROW)

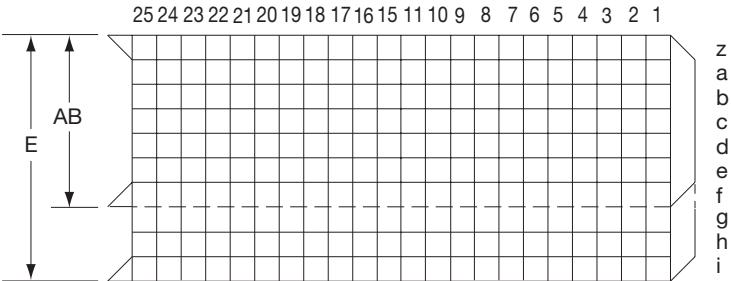

TYPE C (7 ROW) TYPE F (10 ROW)

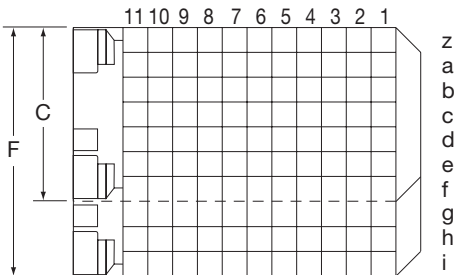

CONTACT STYLES

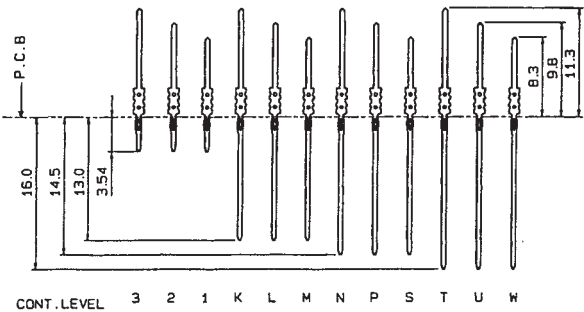

Part Number Index

Multi-Line Module Connector

2mm Hard-Metric for CompactPCI®



PART NUMBER	PAGE
06 7200 0201 00 000	49
06 7200 0202 00 000	49
06 7200 0203 00 000	49
06 7200 0204 00 000	49
06 7200 0205 00 000	49
06 8489 001 001 000	54
06 8489 001 002 000	54
06 8489 001 003 000	54
06 8489 001 010 0007	54
17 7200 055 401 012	41
17 7200 077 400 002	41
17 7200 077 401 002	41
17 7200 077 402 005	41
17 7200 077 403 005	41
17 7200 077 404 005	41
17 7200 095 300 012	39
17 7200 100 008 002	33
17 7200 110 200 012	37
17 7200 125 100 012	35
17 7200 132 211 002	37
17 7200 133 300 002	39
17 7200 133 301 002	39
17 7200 133 302 005	39
17 7200 133 303 005	39
17 7200 133 304 005	39
17 7200 154 000 002	33
17 7200 154 001 002	33
17 7200 154 002 005	33
17 7200 154 003 005	33
17 7200 154 004 005	33
17 7200 154 005 002	33
17 7200 154 006 002	33
17 7200 154 200 002	37
17 7200 154 201 002	37
17 7200 154 202 005	37
17 7200 154 203 005	37
17 7200 154 204 005	37
17 7200 175 100 002	35
17 7200 175 101 002	35
17 7200 175 102 005	35
17 7200 175 103 005	35
17 7200 175 104 005	35
17 8072 055 001 863	48
17 8072 095 000 863	47
17 8072 110 000 863	47
17 8072 110 001 863	46
17 8072 125 000 863	47
17 8075 355 501 863	45
17 8077 176 503 XXX	42

PART NUMBER	PAGE
17 8077 200 504 XXX	43
17 8077 220 501 XXX	42
17 8077 250 502 XXX	43
27 7200 055 400 002	19
27 7200 055 401 002	19
27 7200 055 402 002	19
27 7200 055 403 002	19
27 7200 090 007 002	21
27 7200 090 008 002	21
27 7200 090 009 002	21
27 7200 090 010 002	21
27 7200 095 300 002	15
27 7200 095 301 002	15
27 7200 095 302 002	15
27 7200 095 303 002	15
27 7200 110 000 002	11
27 7200 110 001 002	11
27 7200 110 002 002	11
27 7200 110 003 002	11
27 7200 110 200 002	13
27 7200 110 201 002	13
27 7200 110 202 002	13
27 7200 110 203 002	13
27 7200 125 100 002	17
27 7200 125 101 002	17
27 7200 125 102 002	17
27 7200 125 103 002	17
27 8071 110 003 XXX	25
27 8071 110 013 XXX	25
27 8071 125 003 863	26
27 8071 125 013 863	26
27 8072 095 001 XXX	31
27 8072 095 011 XXX	31
27 8072 110 000 XXX	31
27 8072 110 001 863	30
27 8072 110 010 XXX	31
27 8072 110 011 863	30
27 8072 125 000 863	31
27 8072 125 010 863	31
27 8075 355 011 XXX	28
27 8075 355 012 XXX	28
27 8077 088 001 863	24
27 8077 088 011 863	24
27 8077 176 001 863	22
27 8077 176 011 863	22
27 8077 200 000 863	23
27 8077 200 010 863	23
36 8489 001 020 001	55
60 8489 020 001 049	55

Part Number Index

Multi-Line Module Connector

2mm Hard-Metric for CompactPCI®

PART NUMBER	PAGE
60 8489 020 002 049	55
60 8489 020 003 049	55
60 8489 020 004 049	55
60 8489 020 005 049	55
60 8489 030 001 049	55
60 8489 030 002 049	55
60 8489 030 003 049	55
60 8489 030 004 049	55
60 8489 030 005 049	55
60 8489 030 008 049	55
60 8489 040 001 049	54
60 8489 040 002 049	54
60 8489 040 003 049	54
60 8489 040 004 049	54
60 8489 040 005 049	54
60 8489 040 006 049	54
60 8489 040 007 049	54
60 8489 040 008 049	54
60 8489 050 001 049	54
60 8489 050 002 049	54
60 8489 050 003 049	54
60 8489 050 004 049	54
60 8489 050 005 049	54
60 8489 050 006 049	54
60 8489 050 007 049	54
60 8489 050 008 049	54
60 8489 050 009 049	54
61 8074 006 001 007	44
62 8074 006 011 007	27
62 8074 006 111 007	27
66 8489 00 102 1 000	55
66 8489 00 102 2 000	55
66 8489 00 102 3 000	55
67 7200 2613 00 675	19
67 7200 2613 00 675	21
67 7200 2623 00 675	15
67 7200 2633 00 675	13
67 7200 2643 00 675	11
67 7200 2653 00 675	17
67 7200 2663 00 675	21

PART NUMBER	PAGE
67 7200 6024 00 000	51
67 7200 6064 00 000	51
67 7200 6084 00 000	51
67 7200 6094 00 000	51
67 7200 6124 00 000	50
67 7200 6164 00 000	50
67 7200 6184 00 000	50
67 7200 6194 00 000	50
67 7200 6224 00 000	50
67 7200 6264 00 000	50
67 7200 6284 00 000	50
67 7200 6294 00 000	50
67 7200 6324 00 000	50
67 7200 6364 00 000	50
67 7200 6384 00 000	50
67 7200 6394 00 000	50
67 7200 6424 00 000	51
67 7200 6464 00 000	51
67 7200 6484 00 000	51
67 7200 6494 00 000	51
67 7200 7014 01236	53
67 7200 7014 01248	53
67 7200 7014 01256	53
67 7200 7014 01567	53
67 7200 7014 02578	53
67 7200 7014 03456	53
67 7200 7014 03467	53
67 7200 7014 03478	53
67 7200 7014 03568	53
67 7200 7014 04678	53
67 7200 7114 01235	53
67 7200 7114 01247	53
67 7200 7114 01256	53
67 7200 7114 01258	53
67 7200 7114 01278	53
67 7200 7114 01346	53
67 7200 7114 02348	53
67 7200 7114 02478	53
67 7200 7114 03567	53
67 7200 7114 04578	53

Connector Guide



DIN41612 / EN60603-2 Connectors



Varicon



FFC/FPC Connectors



Memory Card Components



USA

AVX Myrtle Beach, SC
Corporate Offices
Tel: 843-448-9411
FAX: 843-448-1943

AVX North Central, IN
Tel: 317-848-7153
FAX: 317-844-9314

AVX Southwest, AZ
Tel: 602-678-0384
FAX: 602-678-0385

AVX Southeast, GA
Tel: 404-608-8151
FAX: 770-972-0766

AVX Northwest, WA
Tel: 360-699-8746
FAX: 360-699-8751

AVX Mid/Pacific, CA
Tel: 510-661-4100
FAX: 510-661-4101

AVX South Central, TX
Tel: 972-669-1223
FAX: 972-669-2090

AVX Canada
Tel: 905-238-3151
FAX: 905-238-0319

EUROPE

AVX Limited, England
European Headquarters
Tel: ++44 (0) 1252-770000
FAX: ++44 (0) 1252-770001

AVX/ELCO, England
Tel: ++44 (0) 1638-675000
FAX: ++44 (0) 1638-675001

AVX S.A., France
Tel: ++33 (1) 69-18-46-00
FAX: ++33 (1) 69-28-73-87

AVX GmbH, Germany
Tel: ++49 (0) 8131-9004-0
FAX: ++49 (0) 8131-9004-44

AVX srl, Italy
Tel: ++390 (0)2 614-571
FAX: ++390 (0)2 614-2576

AVX Czech Republic
Tel: ++420 465-358-111
FAX: ++420 465-323-010

ASIA-PACIFIC

AVX/Kyocera, Singapore
Asia-Pacific Headquarters
Tel: (65) 6286-7555
FAX: (65) 6488-9880

AVX/Kyocera, Hong Kong
Tel: (852) 2-363-3303
FAX: (852) 2-765-8185

AVX/Kyocera, Korea
Tel: (82) 2-785-6504
FAX: (82) 2-784-5411

AVX/Kyocera, Taiwan
Tel: (886) 2-2698-8778
FAX: (886) 2-2698-8777

AVX/Kyocera, Malaysia
Tel: (60) 4-228-1190
FAX: (60) 4-228-1196

Elco, Japan
Tel: 045-943-2906/7
FAX: 045-943-2910

Kyocera, Japan - AVX
Tel: (81) 75-604-3426
FAX: (81) 75-604-3425

Kyocera, Japan - KDP
Tel: (81) 75-604-3424
FAX: (81) 75-604-3425

AVX/Kyocera, Shanghai, China
Tel: 86-21 6886 1000
FAX: 86-21 6886 1010

AVX/Kyocera, Tianjin, China
Tel: 86-22 2576 0098
FAX: 86-22 2576 0096

Contact:

