


No. of Contacts	DIMENSIONS	
	A	B
4	6.00	8.50
5	8.00	10.50
6	10.00	12.50
7	12.00	14.50
8	14.00	16.50
9	16.00	18.50
10	18.00	20.50
11	20.00	22.50
12	22.00	24.50
13	24.00	26.50
14	26.00	28.50
15	28.00	30.50
16	30.00	32.50
17	32.00	34.50

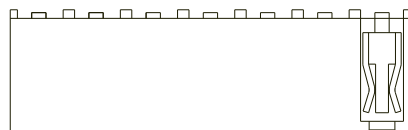


SPECIFICATIONS

Current Rating:	1 Amp
Insulator Resistance:	5000 Mega Ohm Min.
Contact Resistance:	20 milli Ohm Max.
Dielectric Withstanding:	500VAC
Operating Temperature:	-40 Degree C. to +105 Degree C.
Max Processing Temp:	230 Degree C. for 30 seconds (260 Degree C. for 10 seconds)
Contact Material:	Phosphor Bronze
Insulator Material:	Polyester, UL 94V-0
	Standard: Nylon-6T

Contact Finish: Gold/Tin, Selective Plating

Please refer to Catalog # 35, page 61 for all available configurations. Or refer to drawings on our website at www.SullinsElectronics.com

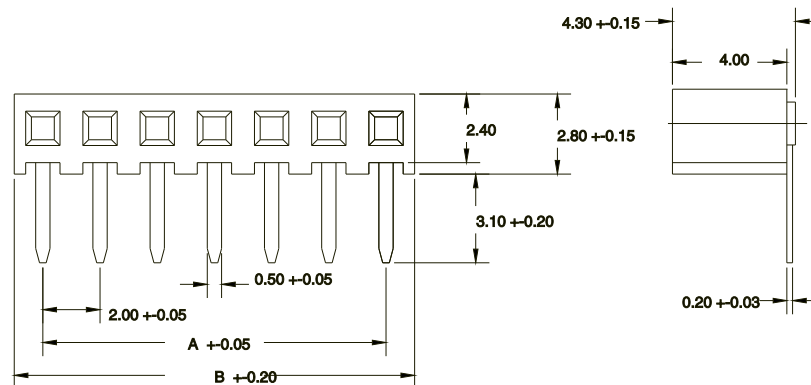

* Where "xx" is number of positions.

SULLINS
801 E. MISSION RD.
SAN MARCOS, CA 92069

GENERAL TOLERANCE	
XX. +	XXX. +
X. + 0.20	.XXX +
.X + 0.10	X.B +
.XX + 0.05	.XB +

SCALE	NTS
UNIT	MM
SIZE	A4



DRAWN
CHECK
APPROVE

DATE
DATE
DATE

DWG. NO.

T0031

PARTS NO.

PPPNxx1FGGN*

TITLE

REV.

SHEET