


Features

- Guard Ring Die Construction for Transient Protection
- Low Power Loss, High Efficiency
- Low Reverse Current
- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Applications

Mechanical Data

- Case: POWERMITE®3, Molded Plastic
- Plastic Material: UL Flammability Classification Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: See Diagram
- Marking: See Page 3
- Weight: 0.072 grams (approx.)
- Ordering Information: See Page 3

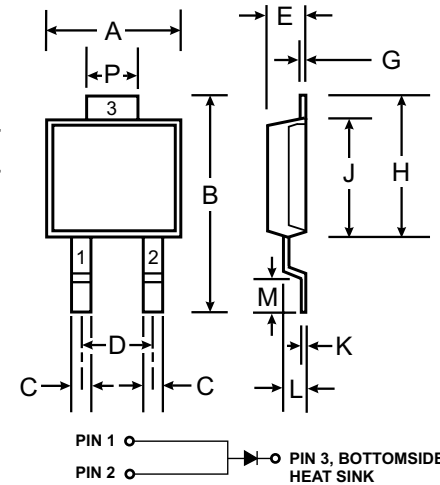

Note: Pins 1 & 2 must be electrically connected at the printed circuit board.

POWERMITE®3		
Dim	Min	Max
A	4.03	4.09
B	6.40	6.61
C	.889 NOM	
D	1.83 NOM	
E	1.10	1.14
G	.178 NOM	
H	5.01	5.17
J	4.37	4.43
K	.178 NOM	
L	.71	.77
M	.36	.46
P	1.73	1.83
All Dimensions in mm		

Maximum Ratings @ T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Characteristic	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	60	V
RMS Reverse Voltage	V _{R(RMS)}	42	V
Average Rectified Output Current (See also Figure 5)	I _O	3	A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	100 50	A
Typical Thermal Resistance Junction to Soldering Point	R _{θJS}	3.2	°C/W
Operating Temperature Range	T _j	-55 to +125	°C
Storage Temperature Range	T _{STG}	-55 to +150	°C

Electrical Characteristics @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 1)	V _{(BR)R}	60	—	—	V	I _R = 0.2mA
Forward Voltage (Note 1)	V _{FM}	—	0.59 0.53 0.72 0.63	0.63 0.57 0.76 0.67	V	I _F = 3A, T _j = 25°C I _F = 3A, T _j = 125°C I _F = 6A, T _j = 25°C I _F = 6A, T _j = 125°C
Reverse Current (Note 1)	I _{RM}	—	2.0 0.6 2.5	200 20 150	μA mA mA	T _j = 25°C, V _R = 60V T _j = 100°C, V _R = 60V T _j = 125°C, V _R = 60V
Total Capacitance	C _T	—	130	—	pF	f = 1.0MHz, V _R = 4.0V DC

Notes: 1. Short duration test pulse used to minimize self-heating effect.