

Steward

Advanced Ferrite Materials, EMI Suppression, and Inductive Products

Home • Ferrite Product Lines • New Products • Technical • General • Contact • Steward Sales

STEWARD PART NUMBERING SYSTEM

28	F	0121	-	0	S	R
MATERIAL TYPE	PRODUCT CODE	PART SIZE CODE	SELECTED DIMENSION CODE	ADDITIONAL DESCRIPTION	PACKAGING CODE	

Ambient Operating Temperature Range :-55°C to +125°C

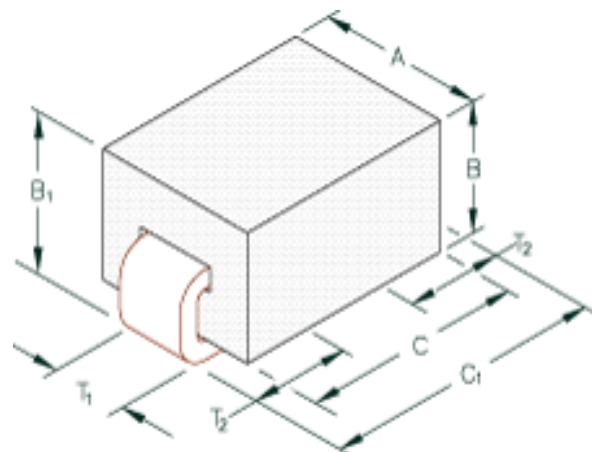


Figure #1

STEWARD PART NUMBERING SYSTEM

DM	3312	X	101	R	-	00
PRODUCT SERIES CODE	PART SIZE CODE	RATED CURRENT CODE	IMPEDANCE VALUE CODE	PACKAGING CODE	ADDITIONAL DESCRIPTION	(10 Pb Free)

Ambient Operating Temperature Range :-55°C to +125°C

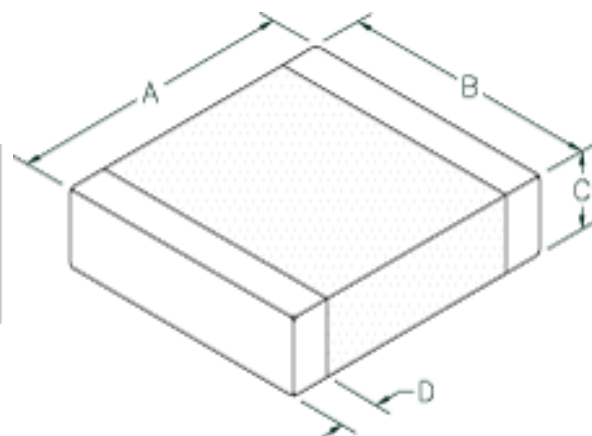


Figure #2

HI1206T500R-00

Drawing Figure #

Fig #
2

Electrical Characteristics


NET Z @ 100MHz	DCR Max	Rated Current mA
50	0.010	6000


Physical Dimensions

A mm	B mm	B1 mm	C mm	C1 mm	D mm	A in	B in	B1 in	C in	C1 in	D in
3.20	1.60	0	1.10	0	0.51	0.126	0.063	0	0.043	0	0.020

Wire Dimensions

T1 mm	T2 mm	T1 in	T2 in
0	0	0	0

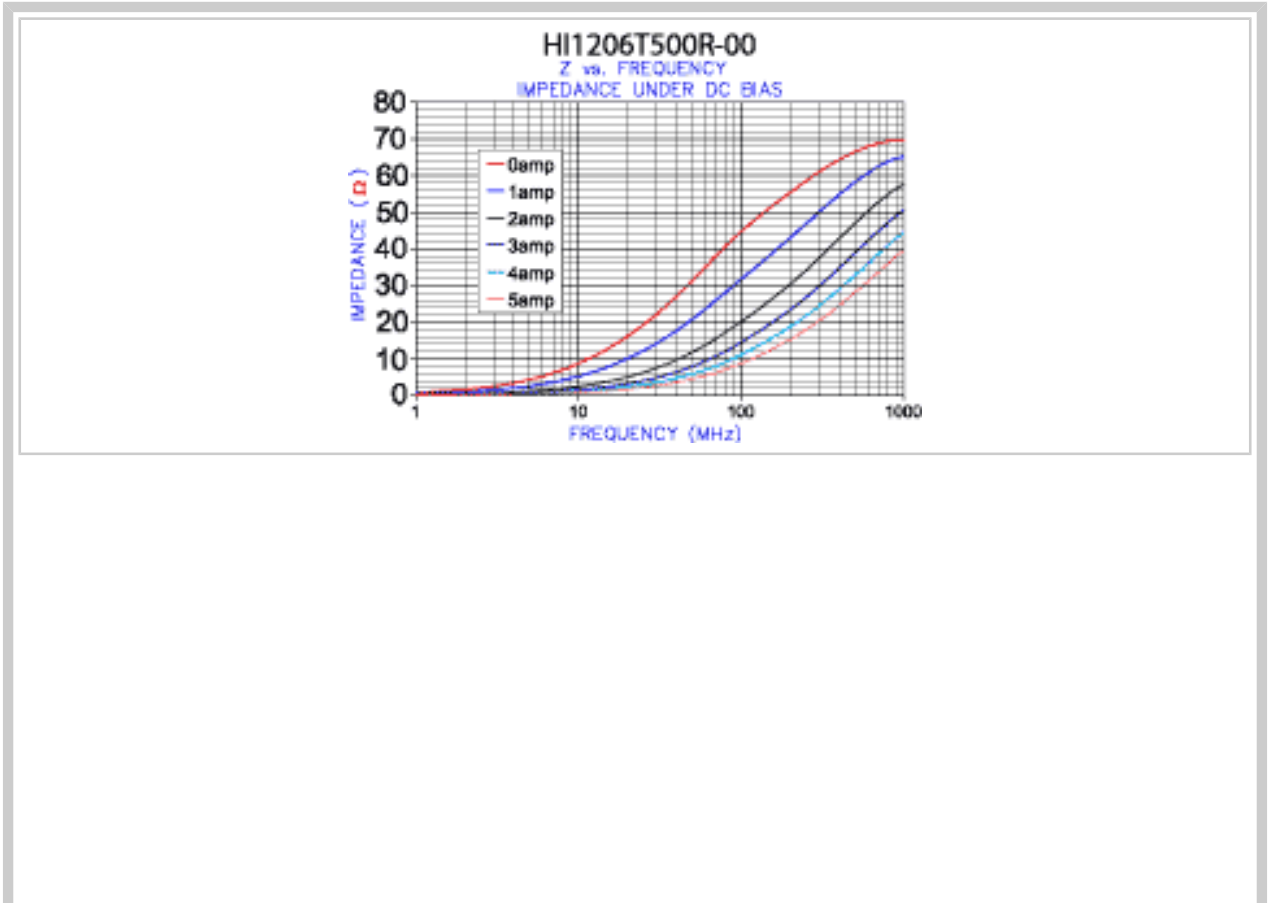

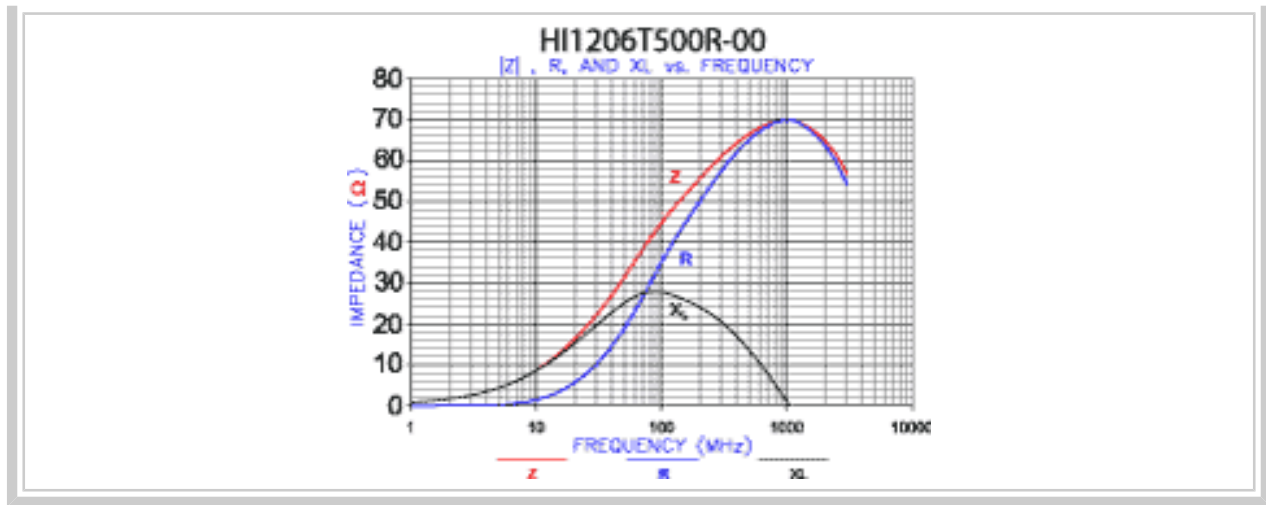

Specifications, which provide more details for the correct use of the described products, are available upon request. All specifications are subject to change without notice. For more information on any of the products listed above, please contact Steward customer service department at (800) 634-2673.

americas@steward.com
mexico@steward.com
europa@steward.com
asia@steward.com

Copyright© 2003 Steward, Inc.

Last Updated: 9/14/2003