



PortServer® TS MEI

Device Server

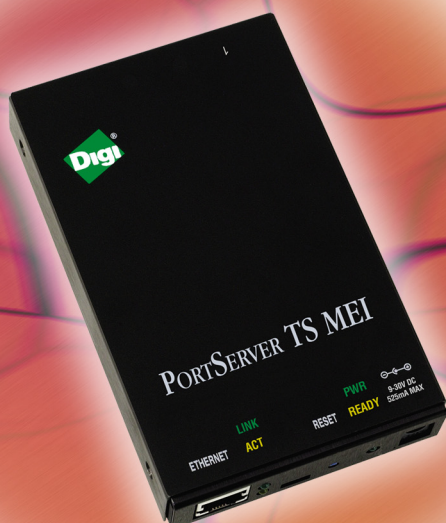

PortServer TS MEI device servers are designed for universal, high-performance serial-to-Ethernet connectivity. They are ideal for RS-232/422/485 applications where remote device management and monitoring are required.

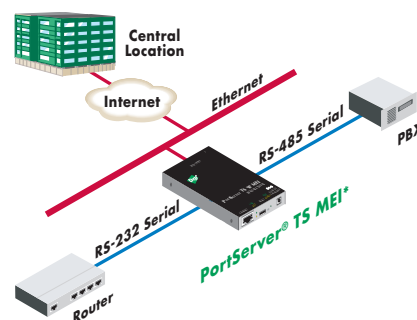

*MEI = Multi-Electrical Interface (RS-232/422/485)

Features/Benefits

- > Easily network-enable multiple serial devices
- > Switch selectable RS-232/422/485 for simple interfacing to virtually any type of serial device
- > Digi's patented RealPort with encryption for COM or TTY port control and management
- > Management and diagnostic utility for simple and efficient device monitoring and troubleshooting
- > Modem emulation for easy integration and replacement of modems
- > Secure communication via SSH v2
- > Port buffering for data capture
- > Easy configuration through web interface (HTTP/HTTPS)
- > SNMP for easy network management
- > PPP for network enabling serial device
- > Industry leading low latency

Overview

The PortServer TS MEI family makes it easy to connect multiple serial devices to your network. It combines the inherent benefits of data networking with proven asynchronous connectivity to deliver powerful yet simple Ethernet connections for all of your serial devices.

PortServer TS MEI delivers universal, high-performance multiport serial-to-Ethernet connectivity and is ideal for applications requiring COM ports, serial tunneling, or where TCP Socket, UDP Socket, or UDP Multicast functionality is needed. RealPort® with encryption makes it possible to establish a connection between the host and networked serial device by creating a local COM or TTY port on the host computer, allowing software applications to work with networked device servers instead of requiring a host adapter.

PortServer TS MEI also delivers powerful features such as data security via SSH v2, port buffering and full SNMP management – making it ideal for applications like console management where device management and monitoring are critical.

PortServer TS MEI is also easy to install locally or remotely through a variety of IP addressing methods (DHCP, RARP, ARP-Ping) along with an application (included on the installation CD) that will automatically detect all PortServer TS MEI devices on your network.

Digi International, the leader in Connectware, makes device networking easy by developing products and technologies that are cost-effective and easy to use. With over 20 million ports shipped worldwide, Digi has been offering the highest levels of performance, flexibility, and quality since 1985.



Connectware™

www.digi.com

Making
DEVICE NETWORKING
easy™

Features/Specifications

FEATURES

- 10/100Base-T Ethernet support
- RJ-45 serial port connection
- RS-232/422/485 switch selectable
- Baud rates up to 230 Kbps
- Full modem and hardware flow control
- TCP/UDP Socket Services
- UDP Multicast
- Telnet and Reverse Telnet
- Patented RealPort with encryption for COM and TTY ports
- 9-30VDC input
- RFC2217
- Modem emulation
- SNMP (read/write)
- PPP
- SSH v2
- Port buffering
- Low latency
- Modbus to Modbus/TCP conversion
- HTTP
- Digi Port Authority – Remote management diagnostics and auto-discovery tool
- DHCP/RARP/ARP-Ping for IP Address assignment
- LED status for link and power
- RJ-45/DB-9F crossover cable included for optional serial configuration

DIMENSIONS

- Length: 5.42 in (13.31 cm)
- Width: 3.33 in (8.46 cm)
- Depth: 0.952 in (2.42 cm)
- Weight: 2.25 oz (64.0 g)

MODEL.....PART NUMBERS

Model	North America	International
PortServer TS 1 MEI	70001805	70001832
PortServer TS 2 MEI	70001806	70001833
PortServer TS 4 MEI	70001807	70001834
Accessories		
Wall-Mount Bracket	76000640	76000640
DIN Rail Bracket	76000682	76000682

OPERATING SYSTEMS

- AIX
- HP-UX
- Linux
- Windows® XP
- Windows 2000
- Windows NT®
- Windows 98/ME
- SCO® OpenServer™
- SCO UnixWare™
- Solaris™ (Intel)
- Solaris (SPARC)
- TCP/UDP Socket Services are operating system independent



REGULATORY APPROVALS



- FCC Part 15, A
- CE
- 55034
- 55022, Class A
- UL 1950
- CSA 22.2 No. 950

POWER REQUIREMENTS

- Ships with 100/240VAC at 12VDC @ .4 Amps max
- 9-30VDC @ .5 Amps max
- Surge protection (with included power supply)
- 4 kV burst (EFT) per EN61000-4-4
- 2 kV surge per EN61000-4-5

ENVIRONMENTAL

- Ambient temperature: 0° C to 50° C (32° F to 122° F)
- Relative humidity: 5% to 90% (non-condensing)
- Ethernet Isolation: 1500VAC min per IEEE 802.3/ANSI x 3.263
- Serial Port Protection (ESD): +15 kV Air 6 AP and +8 kV contact discharge per IEC 1005-4-2

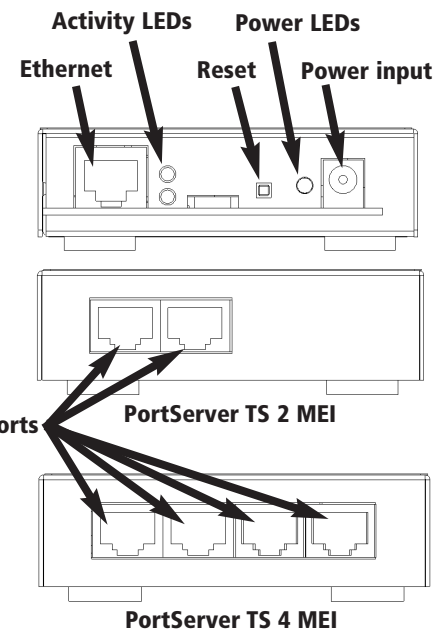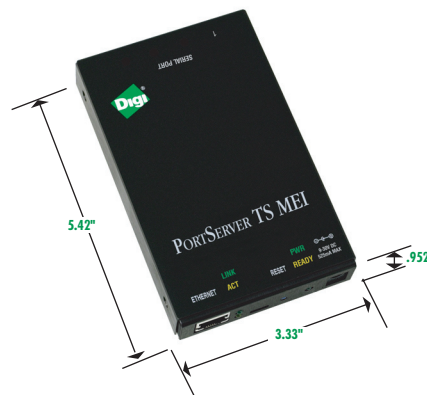

DIGI SERVICE AND SUPPORT

You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. <http://support.digi.com>

Digi International

11001 Bren Road E.
Minnetonka, MN 55343 USA
PH: 877-912-3444
952-912-3444
FX: 952-912-4952
Email: info@digi.com
www.digi.com

Digi International GmbH

Joseph-von-Fraunhofer Str. 23
D-44227 Dortmund
Germany
PH: +49-231-9747-0
FX: +49-231-9747-111
www.digi.de

Digi International (HK) Limited

Suite 1703-05
K Wah Centre
191 Java Road
North Point, Hong Kong
PH: +852-2833-1008
FX: +852-2572-9989
www.digi.cn

www.digi.com

email:
info@digi.com



Connectware™

© 1999-2004 Digi International Inc.

All rights reserved. Digi, Digi International, the Digi logo, the Digi Connectware logo, the Making Device Networking Easy logo, Digi One, PortServer and RealPort are either trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. Microsoft, Windows and the Windows logo are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. All other trademarks are the property of their respective holders.

91001182
C1/1104