


wireless solutions

wireless mobile computing Solutions for your enterprise

GoBook MAX™

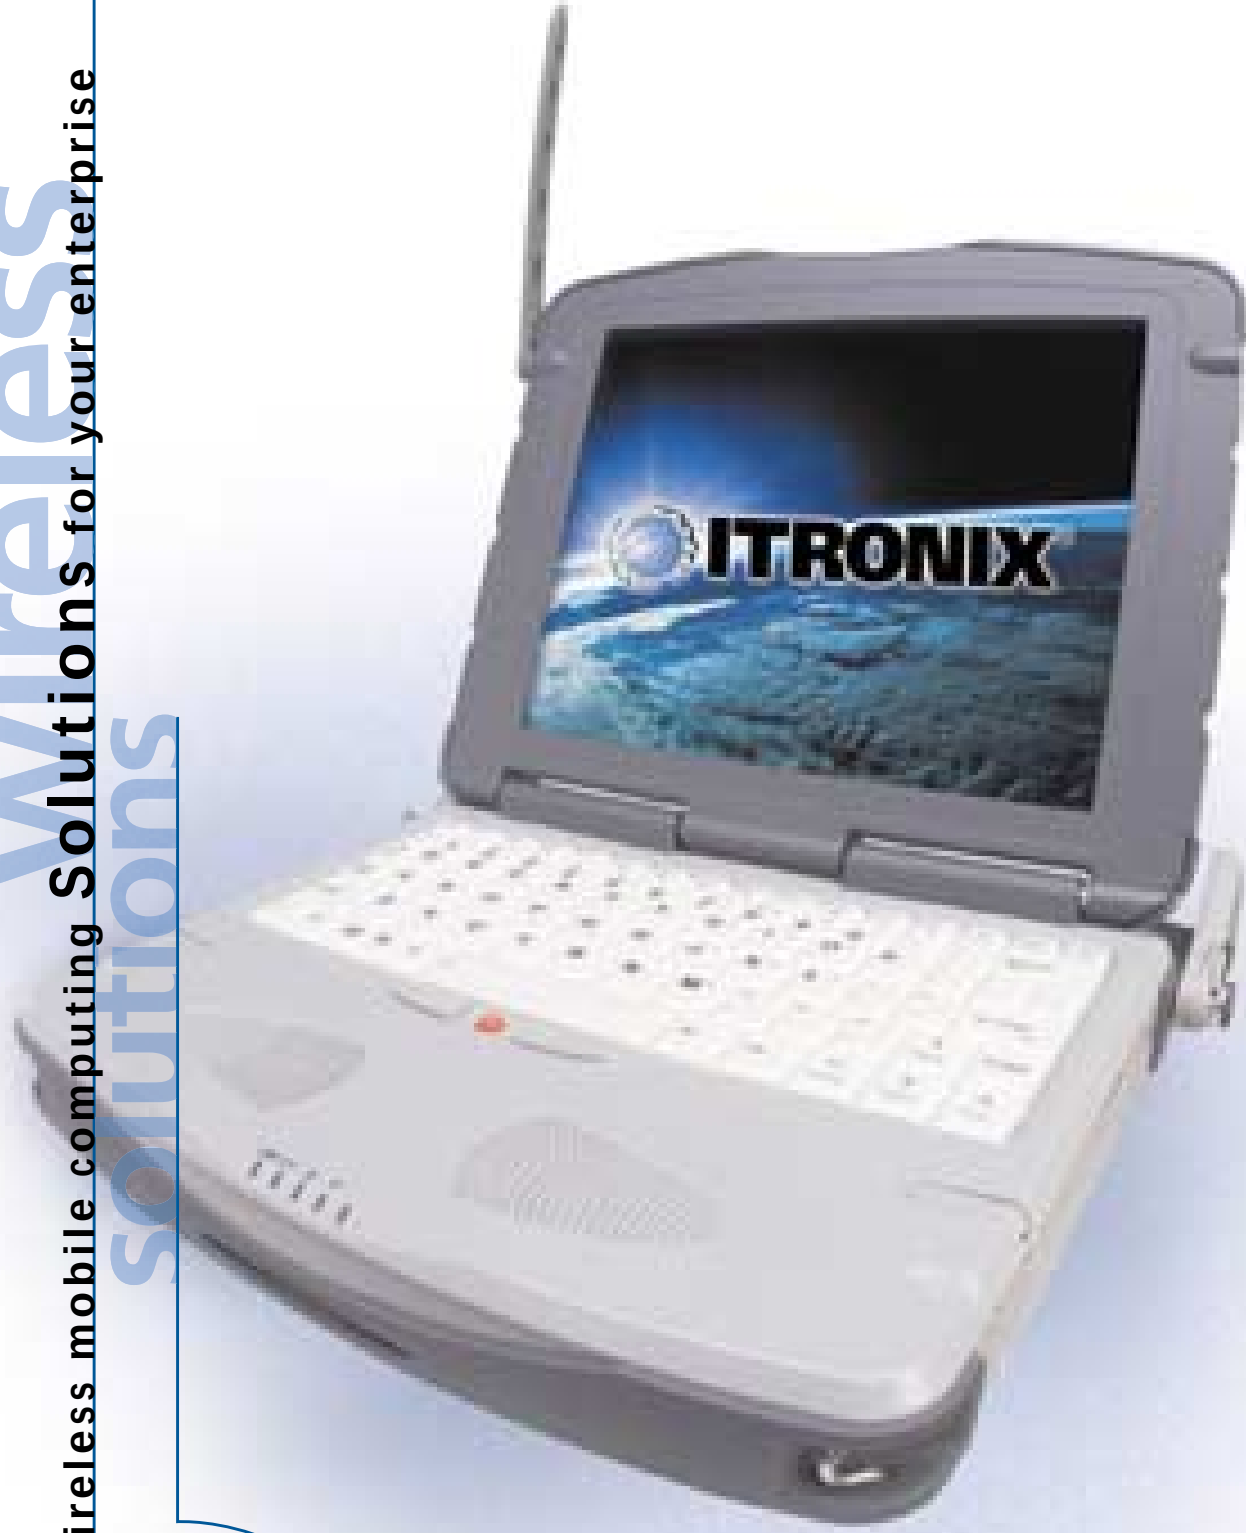

GoBook MAX™

Ultra-rugged computing for an ultra-rugged world

highlights

- 700 MHz Pentium III
- ColorVue™ sunlight-viewable touchscreen display
- Nitevue™ keyboard technology
- Ultra-ruggedized and totally sealed
- Long battery life
- CRMA™ wireless technology
- Integrated communications
- Lightweight

GoBook MAX: the latest chapter in ultra-rugged computing from Itronix

The Itronix GoBook MAX is simply the fastest, most rugged, best wireless notebook computer in the world. The GoBook MAX exceeds military specs for drop, water resistance, dust and vibration. Only Itronix builds a notebook this rugged. The GoBook MAX thrives in the most severe environments imaginable. Freezing cold. Searing heat. Pouring rain. Intrinsically safe, the GoBook MAX enables operators to safely work in HazMat environments; on flightlines, near hazardous chemicals or explosive materials. With Itronix' innovative CRMA™ wireless communications, radios can be swapped or upgraded within each unit. No other computer can compete with the ruggedness, speed and versatility of the GoBook MAX. Backed by a limited lifetime warranty and comprehensive services package, the Itronix GoBook MAX sets a new standard for ultra-rugged, wireless computing.



product specifications

Compact Size/ Weight:	Length: 11" (27.94 cm) • Width: 8.75" (22.25 cm) • Depth: 2.15" (5.461 cm) • Weight: 6.2 lbs. (2.81 kg)
Processor/Memory:	700 MHz Intel PIII processor with 256 KB L2 cache • 128 to 512 MB SDRAM
Storage:	Shock mounted 2.5" 20 GB ruggedized hard disk drive
Power:	Smart 5400 mAh (58.3WH) Lithium-Ion battery pack
Display:	10.4" TFT SVGA Outdoor Colorvue™ display with Anti Glare and Touchscreen • Silicon Motion Lynx EM Plus • Support for 64 bit internal graphics acceleration with integrated 4 MB SGRAM • XGA through external VGA port
Keyboard:	Fully waterproof NiteVue™ glow-in-the-dark keyboard, constructed from phosphorescent plastic • Available for US/Canada • User replaceable
Pointing Device:	Touch screen • Pointing stick and 2 button controls
Operating System:	Microsoft® Windows 98, Windows 2000 • OS support for US/Canada
Interfaces:	PC card slot for (1) Type I, or II card with 32 bit card bus and support for zoomed video • External type III PC card support with optional adapter • Built-in RJ-11 and RJ-45 jacks for integrated fax/modem and ethernet • 2 USB connectors (bootable) • 9 pin high speed serial port connector • 15 pin external video (CRT) port • External speaker and microphone jacks (adapter)
Audio:	Internal microphone and speaker • PCI Audio with AC-97 compliance
Integrated Wireline Communications:	56 Kbps V.90 fax/modem or 10/100M bit Ethernet LAN fax/modem combo • Mini-PCI module
Integrated Wireless Communications:	CDPD, Cingular (BSWD), Cisco Wireless LAN, Motient
CRMA™ Wireless Technology:	Common Radio Module Architecture (CRMA™) with fully integrated, rugged and customer upgradable radio modules • Supports PCMCIA and OEM radio modules • Engineered for minimum radio dense to offer maximum wireless coverage • Superior wireless power management
Environmental Specifications:	Die-Cast Magnesium for all structural components • Operating temperature: -30° to +60°C (-22° to +140°F) • Storage temperature: -55° to +75°C (-67° to +167°F) • 54 repeated 1 meter drops exceeds MIL STD 810E, 516.4, IV, single unit • Rain/ water resistance at 4 inches per hour at approximately 40 psi on all 6 axes, MIL STD 810E, 506.3, III • Vibration per MIL STD 810E, 514.4, I • Dust per MIL STD 810E, 510.3, I
Intrinsic Safety:	Class 1, Division 2, Group D

options

Power Supply:	Vehicle power supply
Vehicle Cradle:	Vehicle dock with lock, power, (2) USB Interfaces, and RF contacts for external vehicle-mounted antennas

For a complete list of available options contact your Itronix representative.

Go Smart. Go Fast. Go Ultra-Rugged. GoBook MAX™.



In our constant effort to improve products and systems, Itronix Corporation reserves the right to change or modify feature and specifications without notice. The following are trademarks or registered trademarks of their respective owners: Itronix, GoBook, Colorvue, NiteVue, CRMA, Microsoft, Windows, Motient, Cingular, Intel, Celeron, & Pentium.
©2001 Itronix Corporation V.1 8/01 10K

Itronix Corporation
801 South Stevens Street
Spokane, WA 99204
USA
Tel: 800-441-1309
509-624-6600
Fax: 509-626-4203
Email: sales@itronix.com
www.itronix.com

Itronix France
12 Rue Le Corbusier
Silic 216
94518 Rungis Cedex
France
Tel: +33 1 46 87 8009
Fax: +33 1 45 60 5595
Email: ventes@itronix.co.uk
www.itronix.co.uk/france

Itronix GmbH
Auelsweg 18
53797 Lohmar
Germany
Tel: +49 (0) 2246 92030
Fax: +49 (0) 2246 18572
Email: vertrieb@itronix.co.uk
www.itronix-gmbh.de

Itronix (UK) Ltd.
Eden Road
Walsgrave Triangle Business Park
Coventry CV2 2TB
United Kingdom
Tel: +44 (0) 24-76604040
Fax: +44 (0) 24-76603060
Email: sales@itronix.co.uk
www.itronix.co.uk

Designed and configured in the U.S.A.