


PT-25-FB RS-485

COMPUTER CONTROLLED HEAVY DUTY PAN & TILT

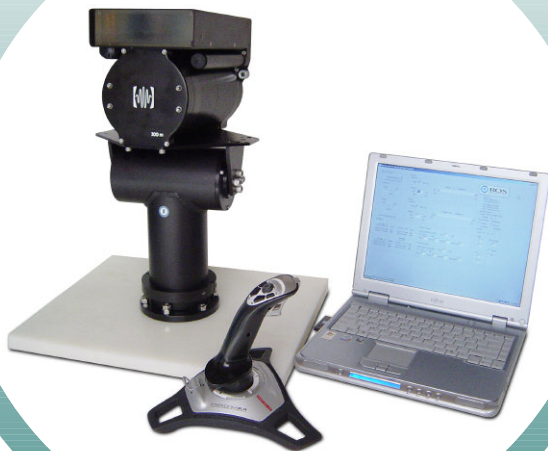

RS-485 / RS-232 computer controlled for advanced features and control options

Real-time position feedback, variable rotation speed and braking, and networkability of multiple pan and tilts

30 lb-ft (40 N-m) of output torque on each axis and accommodates payloads up to 100 lbs (45 kg)



Rugged pan and tilt unit with RS-485 / RS-232 computer control to remotely orient camera systems, acoustic equipment, antennas, and other instrumentation

The PT-25-FB RS-485 pan and tilt provides 30 lb-ft (40 N-m) of output torque on each axis. Heavy-duty ball bearings supporting the output shaft allow it to accommodate heavy payloads up to 100 lbs (45 kg). Each axis includes a DC brushless stepper motor coupled to low backlash harmonic gearing. It is designed to allow stalling of the output shafts without damage to the gears, the motors, or control electronics.

The RS-485 / RS-232 control enables the pan and tilts to be highly configurable and precision controllable. By using either the ROS positioner GUI (graphical user interface) or the ROS communication protocol for custom software integration you can control unique features such as: variable rotation speed, real-time position feedback, variable braking, programmable software limits, and networkability of multiple ROS pan and tilts sharing the same cable. A total of only four wires (two for power; two for communication) are needed to operate the RS-485 / RS-232 pan and tilts.

Using RS-485 control provides several advantages over RS-232. RS-485 allows communication over longer lengths of cable (1000 feet) and enables the ability for networking multiple nodes. A typical computer has the capability of RS-232 communication through its serial COM ports. Inexpensive devices are readily available for converting RS-232 to RS-485, USB to RS-485, or Ethernet to RS-485. The unit may also be controlled by an external joystick.

The PT-25-FB RS-485 pan and tilt is available in two versions: air-filled or oil-filled. Oil-filled units are used for deep water applications up to 3,000 meter depth. Air-filled units are used for shallow water applications up to 30 meters depth and are excellent for above water applications where rain, humidity, and dust are issues.

PT-25-FB RS-485 Computer Controlled Heavy Duty Pan & Tilt

PERFORMANCE

Power:

Operating Range:

24 - 28 VDC, 1.6 amps (max) per axis @ 24 VDC

Braking Mode:

24 VDC, adjustable, 0 mA to 1.5 amps per axis

At Rest (not braking):

< 100 mA per axis

Torque:

30 lb-ft (40 N-m) per axis @ 5.4 degrees/second (0.90 RPM)

Rotation Speed (160:1 gears):

Variable, 0.5 to 10 degrees/second (0.08 to 1.67 RPM)

Harmonic gear backlash (160:1 gears):

0.5 degrees (30 arc minutes)

Scan Range (both axes):

0 to 360 degrees when used with no external stop collar

Scan Range with stop collar & optional yoke bracket:

12 to 348 degrees pan axis, +/- 90 degrees tilt axis

Feedback Potentiometer:

Absolute position (1000 ohm wire-wound), 10 bit A/D

Resolution:

+/- 0.5 degrees (30 arc minutes)

Control protocol:

Type:

RS-485, 2-wire half duplex, 8 bit data, 1 stop bit, no parity, no hardware flow control

Command Protocol:

ROS Document 21-30022

Supported Baud Rates:

Factory set to 9.6 Kbaud, 19.2 Kbaud, or 57.6 Kbaud

Networkability:

Up to 32 ROS RS-485 nodes sharing the same cable for power and communication

MECHANICAL

Housing Material:

Anodized 6061-T6 Aluminum

Electropolished 316 Stainless Steel

Height:

286 mm (11.25 in)

286 mm (11.25 in)

Width:

Air-filled:

199 mm (7.85 in)

199 mm (7.85 in)

Oil-filled with bellofram:

243 mm (9.55 in)

243 mm (9.55 in)

Length without connector:

126 mm (4.95 in)

126 mm (4.95 in)

Main Body Diameter:

107 mm (4.20 in)

107 mm (4.20 in)

Output Shaft Diameter:

38.1 mm (1.50 in)

38.1 mm (1.50 in)

Weight in Air:

Air-filled:

8.7 kg (19.2 lbs)

10.5 kg (23.2 lbs)

Oil-filled:

9.8 kg (21.5 lbs)

11.6 kg (25.5 lbs)

Weight in Water:

Air-filled:

4.6 kg (10.2 lbs)

9.3 kg (20.6 lbs)

Oil-filled:

5.7 kg (12.5 lbs)

10.8 kg (23.9 lbs)

Standard Connectors:

LPMBH-4-MP

Housing Mounting:

Four 3/8-16 threaded holes in output pan shaft

Equipment Mounting:

Four 3/8-16 threaded holes in output tilt shaft

Mounts:

ROS mounting plate and optional yoke bracket

External Mechanical Limits:

ROS stop collar

Compensator (oil-filled units only):

Bellofram

ENVIRONMENTAL

Operating Depth Rating:

Air-filled:

30 m (100 ft)

Oil-filled:

3,000 m (10,000 ft)

Operating Temperature:

up to +50°C (122°F)

Storage Temperature:

-20°C to +60°C (-4°F to 140°F) in air



ROS STANDARD PIN-OUT

1 - DC COMMON

2 - +24 VDC

3 - RS-485 A

4 - RS-485 B

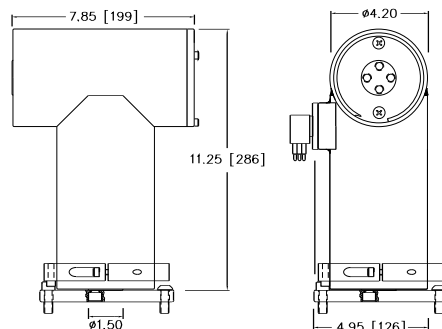

5618 Copley Drive
San Diego, CA 92111 USA
Tel (858) 565-8500
Fax (858) 565-8808
East Coast Office (804) 754-3936

www.rosys.com
sales@rosys.com