


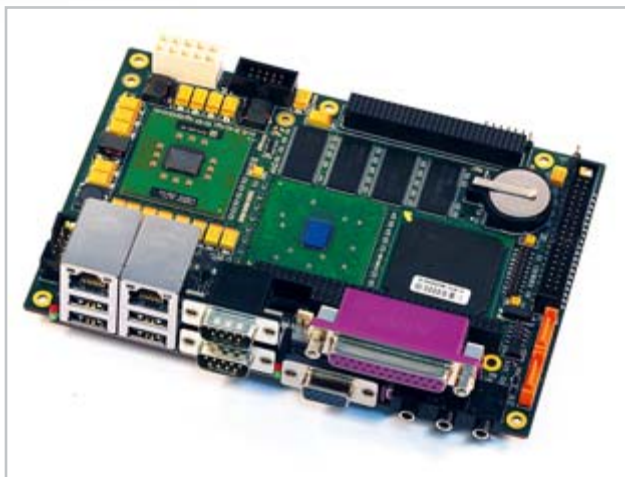

Features

- Intel® Pentium® M up to 1.8 GHz onboard
- Up to 1 GB DDR SDRAM ECC soldered onboard
- Two Gigabit Ethernet ports
- Four USB 2.0 ports
- Two SerialATA channels
- PC/104-Plus modules support
- Protective coating (optional)
- 50G/5G – shock/vibration resistance
- Operating temperature:
 - 0°C to +70°C — commercial
 - 40°C to +85°C — industrial

Overview

CPC800 is a compact single board computer in EPIC form-factor. The board is based on Intel® Pentium® M processor up to 1.8 GHz and up to 1 Gb of DDR SDRAM.

All components including CPU, SDRAM and 32 MB solid-state disk are soldered onboard thus providing superior shock/vibration resistance.

For demanding applications there is a CompactFlash socket for cards of up to 8 GB.

Two Gigabit Ethernet ports make CPC800 an ideal platform for robust redundant systems. Very compact size of CPC800 – 115 × 165 mm – combines full set of PC functions including video and audio interfaces.

Onboard 32K nonvolatile RAM allows users to save critical data in case power fails. CPC800 also has 64K EEPROM memory for user applications.

One of the board's benefits is a PC/104 connector, which allows EPIC and PC/104 modules work together as an integral system.

The board can withstand shock up to 50g and vibration up to 5g in 3 dimensions with working temperatures from –40°C to +85°C.

CPC800 is available in two configurations: CPC800-01 (basic) and CPC800-02 (with LVDS).

Technical Specifications

System

- Intel® Pentium® M processor, up to 1.8 GHz
- Up to 2 MB L2 on-die cache at CPU speed
- 400 MHz processor system bus
- Chipset: 82855GME GMCH & 6300 ESB ICH
- Up to 1 GB PC2700 soldered DDR SDRAM with ECC
- Hardware monitor: voltages and temperature monitoring, system control functions
- Programmable watchdog timer
- Real time clock with Li battery
- MTBF: 110000 hours

BIOS

- Phoenix® BIOS with backup copy
- Reserved CMOS memory
- LAN Boot
- USB Boot
- Multi Boot
- Quick Boot
- ACPI 3.0

Graphics

- Video controller integrated in 855GME
- 2D/3D built-in accelerator
- Shared video memory up to 64 MB
- Analog display connector supports resolution up to 2048 × 1536 @ 75 Hz
- LVDS support

Storage

- 32 MB solid-state disk soldered onboard
- CompactFlash™ Type I/II or Microdrive socket
- Two EIDE Ultra ATA/100 Interfaces
- Two SerialATA channels

Software Support

- Windows® 2000, XP
- QNX® 6.0
- Linux® 2.4.20, 2.6.11
- Windows® CE
- Fastwel DOS™ (MS™ DOS compatible)

Interfaces

- Two Gigabit Ethernet ports 10/100/1000 Mb/s
- Four USB 2.0 ports
- PC/104: 16-bit ISA bus
- PC/104-Plus: 32-bit PCI bus
- Four serial ports, high speed NS16C550 compatible (2 RS-232 and 2 RS-485)
- Parallel port: SPP/ECP/EPP compatible
- PS/2 keyboard and mouse interface
- AC'97 2.3 compliant stereo audio
- LPC interface
- Three programmable LEDs

Mechanical

- Dimensions: 115 × 165 mm (4.5" × 6.5")
- Weight: 0.365 kg

Power Supply Options

- ATX Power connector: 5 V, 3.3 V, 12 V or
- External PC/104 Plus Power Supply (PCI connector) max 25 W

Environmental conditions

- Operating temperature:
 - 40°C to +85°C – industrial
 - 0°C to +70°C – commercial
- Storage temperature: –55°C to +95°C
- Humidity: 0% to 95%, noncondensing
- Shock/Vibration: 50G/5G
- Cooling: heatsink and fan


Warranty

- 3 years for parts and labor

List of deliverables

- CPC800 processor module with fan (60×60×10) installed
- 80-thread IDE cable
- SATA cable
- SATA power cable
- RS-232/RS-485 cable
- ATX power cable
- CD-ROM with documentation and service SW
- Package

Board Layout

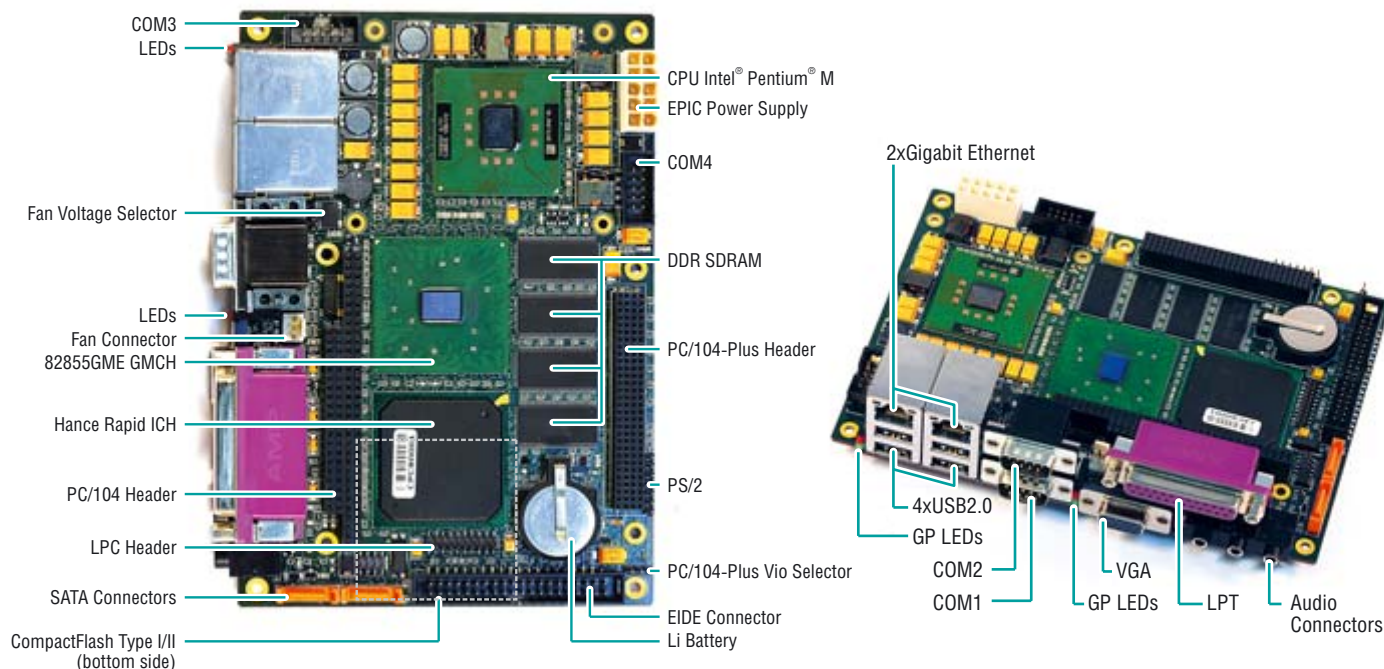

Ordering Information

CPC800 Configuration

CPC800 - 02 - P1.8 - RAM1024 - I - \Options

Device Type

CPC800 EPIC, Pentium® M, DDR SDRAM soldered, FFD 32Mb, SVGA, 2xGigabite LAN, LVDS

Processor

C1.0 Celeron M 1.0 GHz, LV, 400 MHz FSB
P1.4 Pentium M 1.4 GHz, 400 MHz FSB
P1.8 Pentium M 1.8 GHz, 400 MHz FSB

Soldered Memory

RAM512 512 MB soldered DDR SDRAM ECC
RAM1024 1024 MB soldered DDR SDRAM ECC

Temperature Range

I Industrial Range, -40...+85°C
C Commercial Range, 0...+70°C

Options

\xxx Choose available options from the table

CPC800 Available Options

Compact Flash Module	
\CF256	256 MB Compact Flash, industrial (CF256C – commercial)
\CF512	512 MB Compact Flash, industrial (CF512C – commercial)
\CF1024	1024 MB Compact Flash, industrial (CF1024C – commercial)
\CF2G	2 G Compact Flash, industrial (CF2GC – commercial)
\CF4G	4 G Compact Flash, industrial (CF4GC – commercial)
\CF8G	8 G Compact Flash, industrial (CF8GC – commercial)
\CF16G	16 G Compact Flash, industrial (CF16GC – commercial)
Disk Drive 2.5" Installed	
\HDDxx	Hard Disk Drive 2.5" xx GB
\FFD2048	Flash Disk 2.5" 2048 MB
Coating	
\COATED	Protective coating
Operating System Presetting	
\FDOS	Fastwel DOS
\XPE	Windows XP Embedded
\QNX	QNX 6.0
\WCE	Windows CE 5.0
\LNX	Linux 2.4.20, 2.6.11

Other configurations and options are available upon request.

Example

CPC800-02-P1.4-RAM512-C\CF512C\HDD20\COATED\XPE

EPIC, Pentium® M SBC, DDR, FFD 32Mb, SVGA, 2xGigabit LAN, LVDS
Pentium M 1.4 GHz, 400 MHz FSB
512 MB soldered DDR SDRAM
Commercial temperature range, 0...+70°C
512 MB Compact Flash, commercial
Hard Disk Drive 2.5" 20 GB
Protective coating
Windows XP Embedded

Ver. 1.1 2008

Product specifications are subject to change without notice

Corporate Offices

Fastwel Co. Ltd.

108 Profsoyuznaya str.
Moscow, Russia 117437
Tel: +7 (495) 232-1681
Fax: +7 (495) 232-1654
E-mail: info@fastwel.com
Web: www.fastwel.com

Fastwel Inc.

55 Washington Street, Suite
555, Brooklyn NY 11201 USA
Tel: +1 (718) 554-3686
Fax: +1 (718) 797-0500
E-mail: info@fastwelcorp.com
sales@fastwelcorp.com

