

# Thermal Curve Calculator

Select desired Heatsink Part # (RoHS / non-RoHS) or Product type:

Micro NO Heatsink 

This is for a: MICRO

Is this for a Front End Module? (Y/N)

Y

Enter Device's Maximum Output Power:

100


Enter Minimum Expected Efficiency in %:

79

This Calculator assumes the efficiency is constant over all line and load conditions. In the real world this is not the case. Please verify efficiency if your application deviates from nominal. *Verify all thermal management designs experimentally*

## Thermal Curves for Selected Item

(Not All Curves in the Legend are Available for All Items)

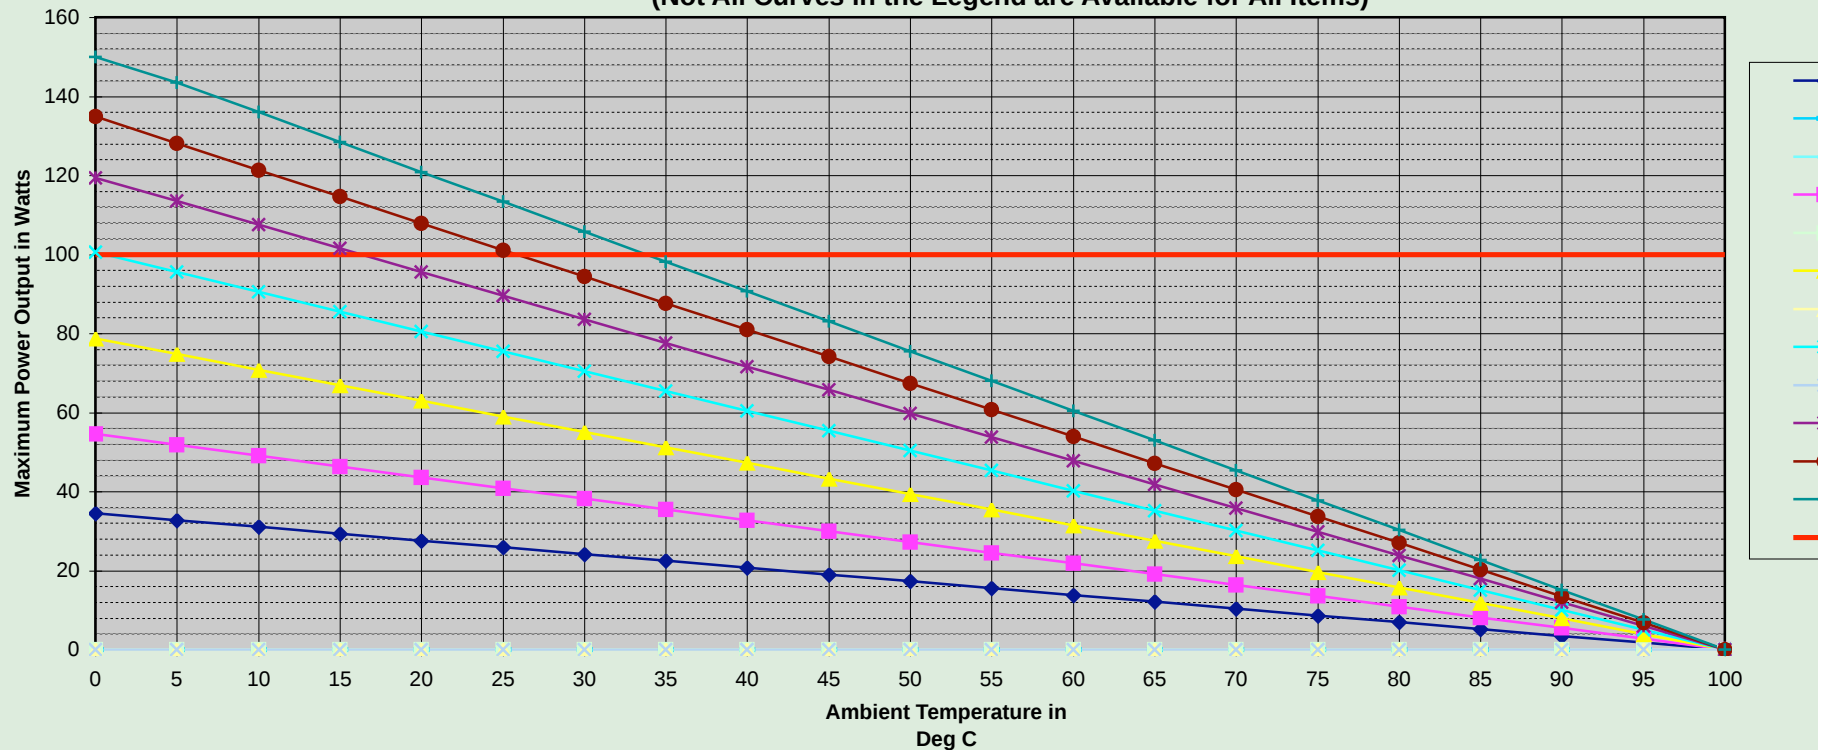

## Thermal Curve Calculator

---

## Thermal Curve Calculator

ency remains  
ions. In the real  
e verify the  
s significantly  
*anagement*  
/.

- ◆— Free Air
- 50 LFM
- ◆— 100 LFM
- 200 LFM
- 250 LFM
- ▲— 400 LFM
- ▲— 500 LFM
- ✕— 600 LFM
- ✕— 750 LFM
- ✱— 800 LFM
- 1000 LFM
- +— 1200 LFM
- Power Limit

## Thermal Curve Calculator