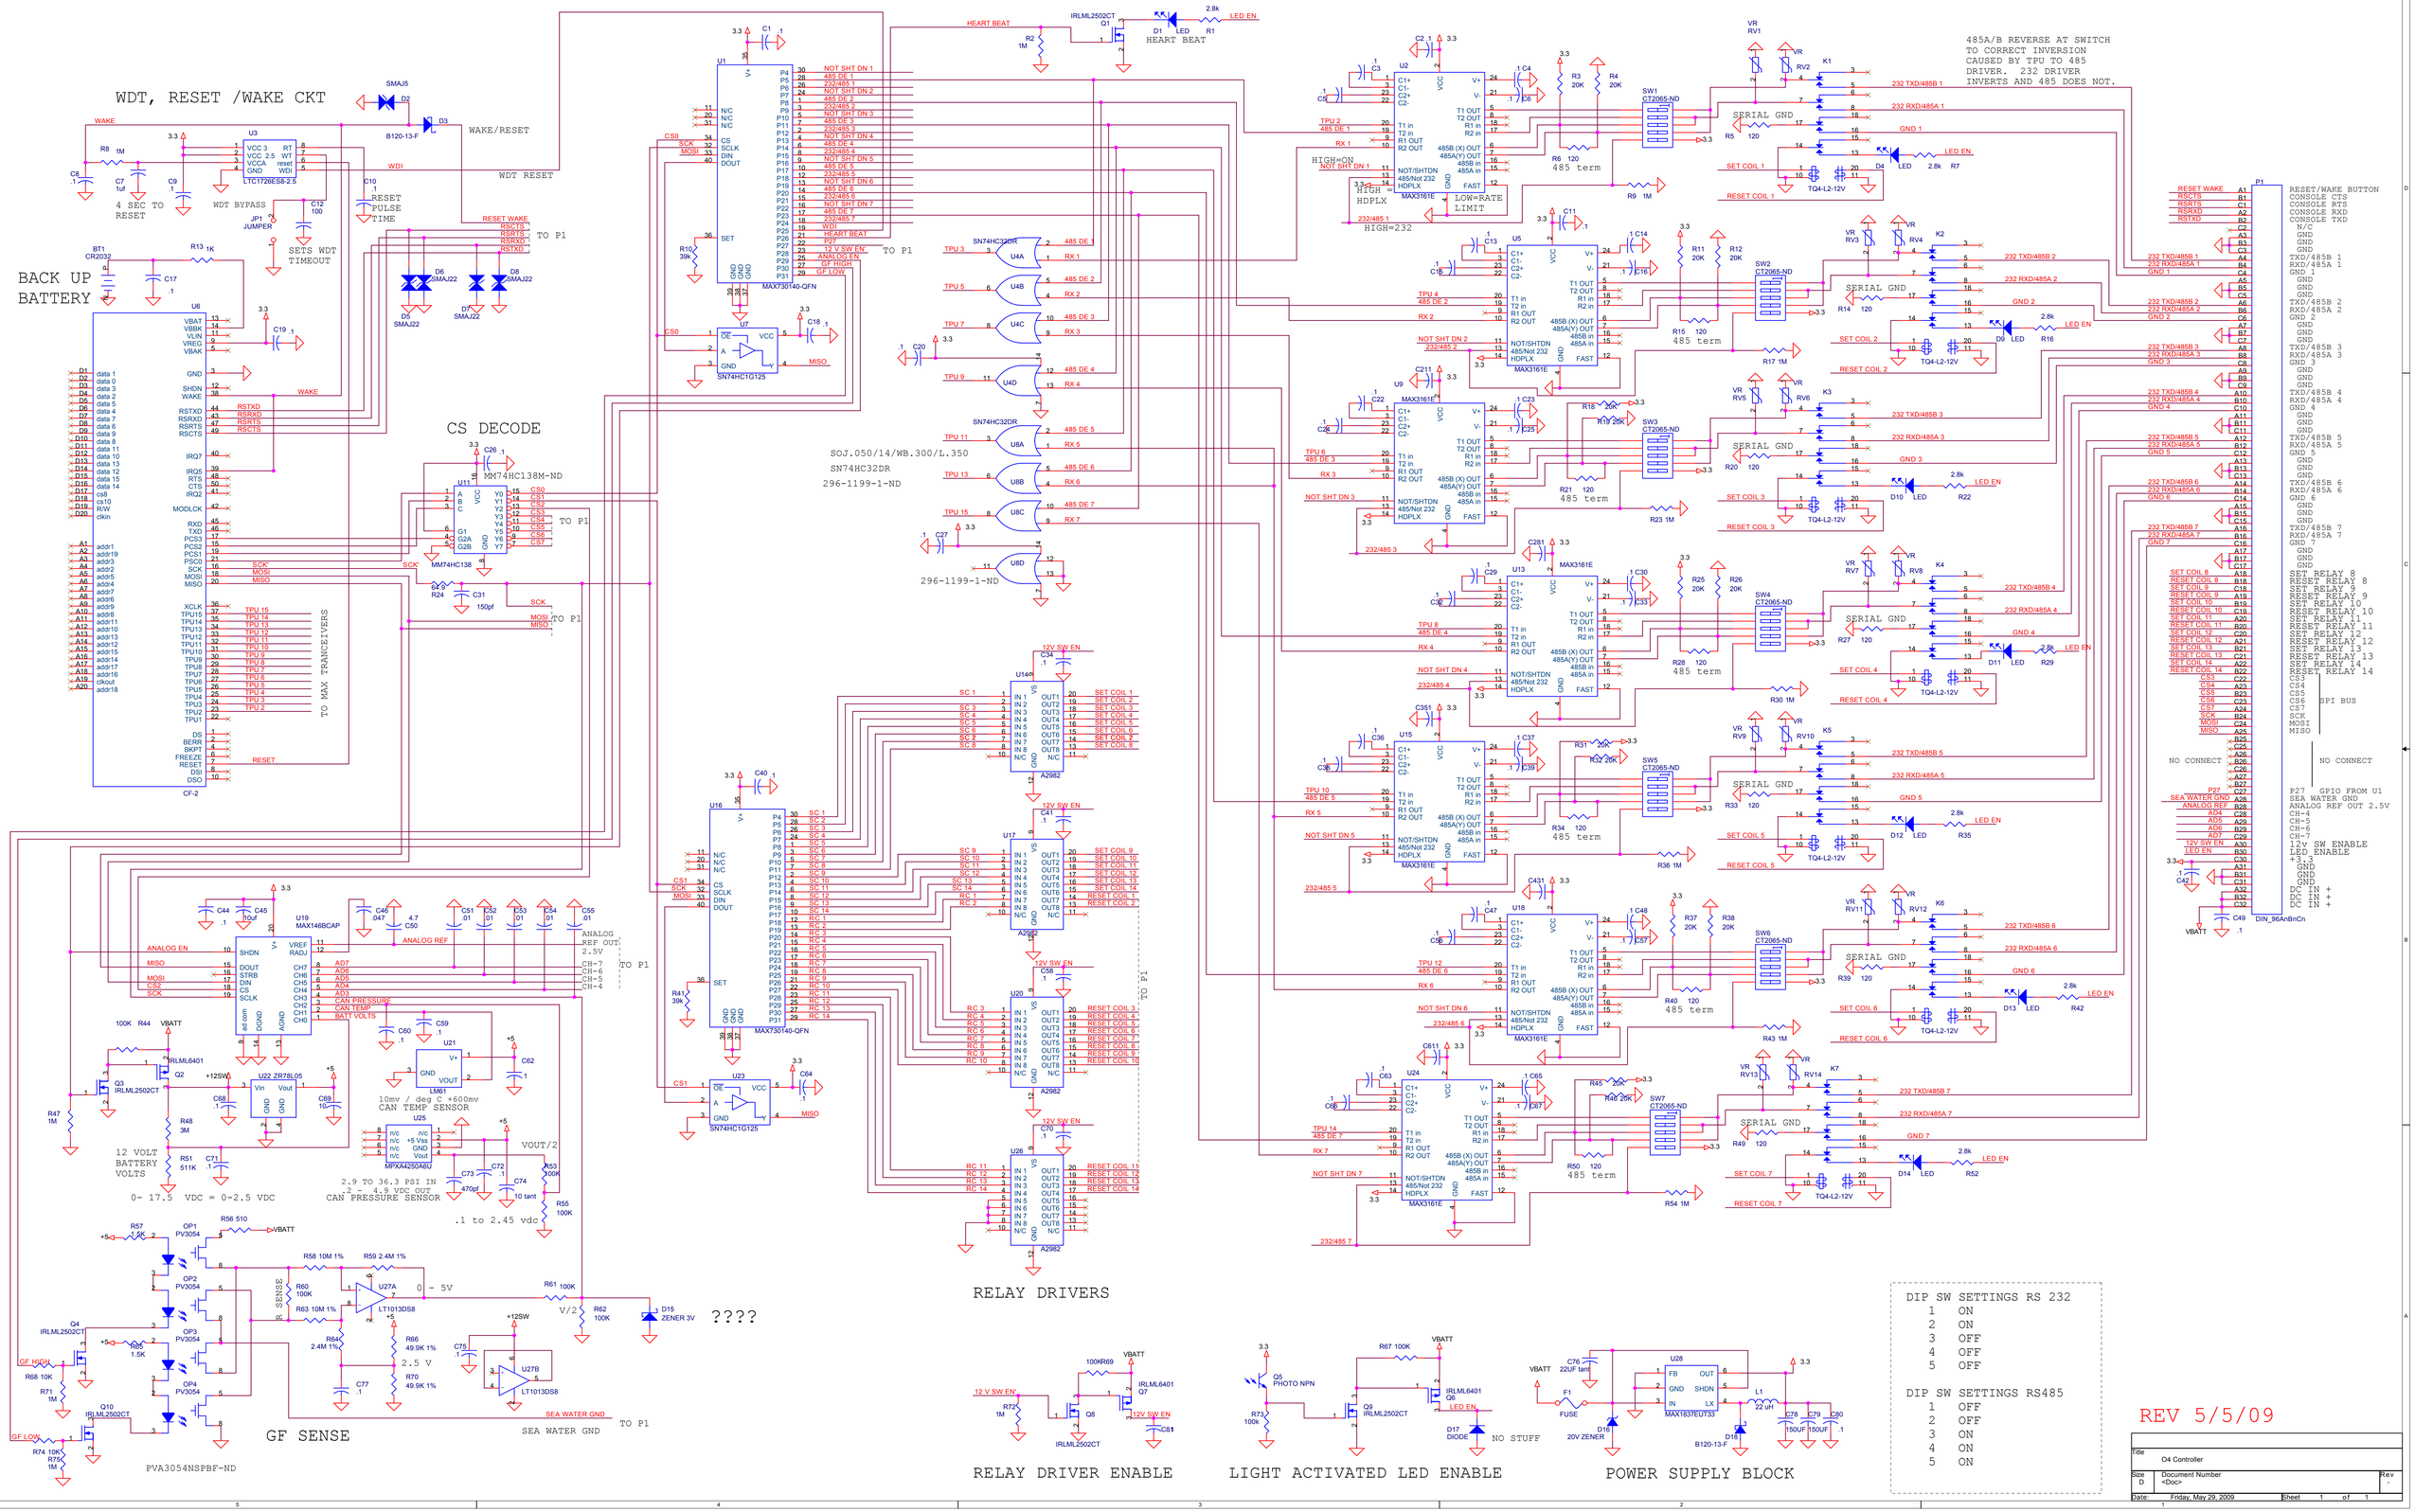
WDT, RESET /WAKE CKT
BACK UP BATTERY
CS DECODE
TO MAX TRANSCEIVERS
RELAY DRIVERS
GF SENSE
RELAY DRIVER ENABLE
LIGHT ACTIVATED LED ENABLE
POWER SUPPLY BLOCK
485A/B REVERSE AT SWITCH TO CORRECT INVERSION CAUSED BY TPU TO 485 DRIVER. 232 DRIVER INVERTS AND 485 DOES NOT.
DIP SW SETTINGS RS 232
1 ON
2 ON
3 OFF
4 OFF
5 OFF
DIP SW SETTINGS RS485
1 OFF
2 OFF
3 ON
4 ON
5 ON
REV 5/5/09
Title O4 Controller
Size D
Document Number <Doc>
Rev -
Date: Friday, May 29, 2009
Sheet 1 of 1