


Trigger Schedule

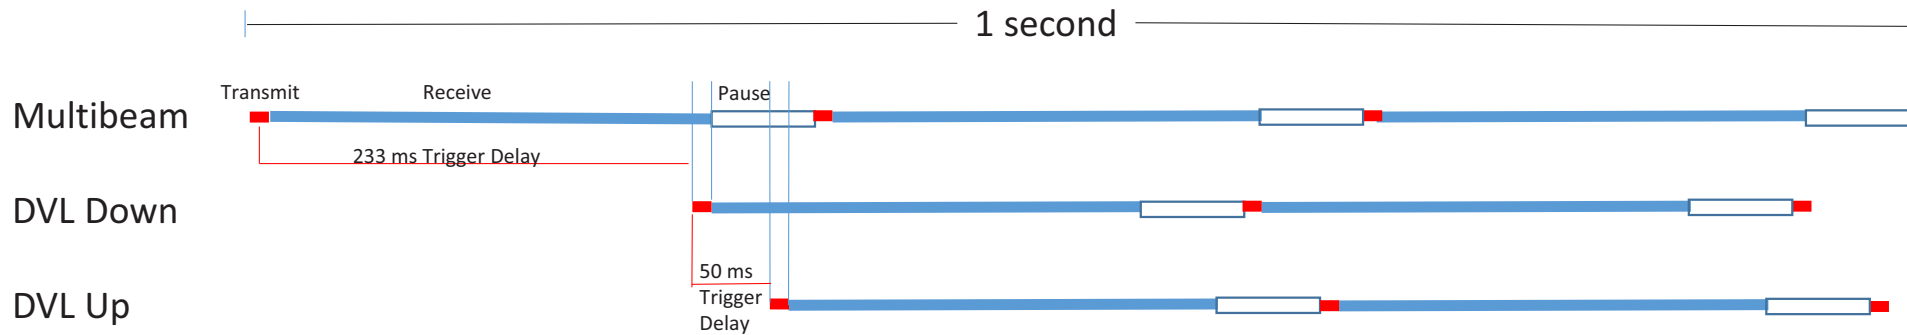

- Sonar runs on a fixed rate (3 Hz): *Trigger Mode 1, Set_rate 3*
- Trigger out from sonar has a 233ms *delay set_trigger_mode and set_trigger_delay ref [T1]*
- Single trigger line into the DVL housing and into the Down DVL
- Some kind of Trigger delay circuit adds ~50ms delay to Up DVL (??? is this possible ??)