

LM6121/LM6221/LM6321 High Speed Buffer

General Description

These high speed unity gain buffers slew at 800 V/ μ s and have a small signal bandwidth of 50 MHz while driving a 50 Ω load. They can drive ± 300 mA peak and do not oscillate while driving large capacitive loads. The LM6121 family are monolithic ICs which offer performance similar to the LH0002 with the additional features of current limit and thermal shutdown.

These buffers are built with National's VIPTM (Vertically Integrated PNP) process which provides fast PNP transistors that are true complements to the already fast NPN devices. This advanced junction-isolated process delivers high speed performance without the need for complex and expensive dielectric isolation.


Features

- High slew rate 800 V/ μ s
- Wide bandwidth 50 MHz
- Slew rate and bandwidth 100% tested
- Peak output current ± 300 mA
- High input impedance 5 M Ω
- LH0002H pin compatible
- No oscillations with capacitive loads
- 5V to ± 15 V operation guaranteed
- Current and thermal limiting
- Fully specified to drive 50 Ω lines

Applications


- Line Driving
- Radar
- Sonar

Simplified Schematic

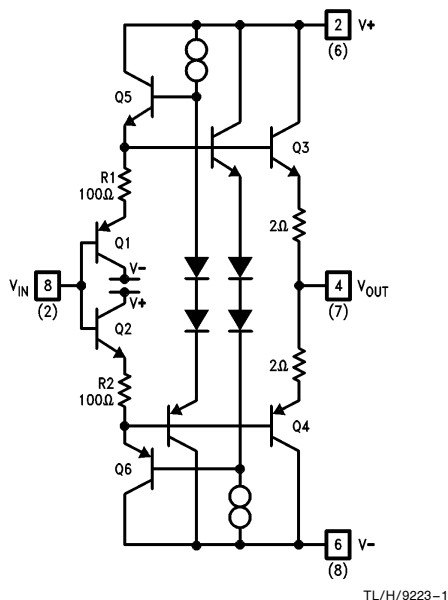


Numbers in () are for 8-pin N DIP.

Connection Diagrams



*Heat-sinking pins. See Application section on heat sinking requirements.


Order Number LM6221N,
LM6321N or LM6121J/883
See NS Package
Number J08A or N08E



Top View

Note: Pin 6 connected to case.

Order Number LM6221H or
LM6121H/883
See NS Package
Number H08C



*Pin 3 must be connected to the negative supply.

**Heat-sinking pins. See Application section on heat-sinking requirements. These pins are at V- potential.

Order Number LM6321M
See NS Package Number M14A

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage	36V (± 18)
Input to Output Voltage (Note 2)	$\pm 7V$
Input Voltage	$\pm V_{\text{supply}}$
Output Short-Circuit to GND (Note 3)	Continuous
Storage Temperature Range	-65°C to $+150^{\circ}\text{C}$
Lead Temperature (Soldering, 10 seconds)	260°C
Power Dissipation	(Note 10)

ESD Tolerance (Note 8)	$\pm 2000V$
Junction Temperature ($T_{J(\text{max})}$)	150°C

Operating Ratings

Operating Temperature Range	-55°C to $+125^{\circ}\text{C}$
LM6121H/883	-40°C to $+85^{\circ}\text{C}$
LM6221	0°C to $+70^{\circ}\text{C}$
LM6321	
Operating Supply Range	4.75 to $\pm 16V$
Thermal Resistance (θ_{JA}), (Note 4)	
H Package	150°C/W
N Package	47°C/W
M Package	69°C/W
Thermal Resistance (θ_{JC}), H Package	17°C/W

DC Electrical Characteristics

The following specifications apply for Supply Voltage = $\pm 15V$, $V_{CM} = 0$, $R_L \geq 100\text{ k}\Omega$ and $R_S = 50\Omega$ unless otherwise noted. **Boldface** limits apply for $T_A = T_J = T_{MIN}$ to T_{MAX} ; all other limits $T_A = T_J = 25^{\circ}\text{C}$.

Symbol	Parameter	Conditions	Typ	LM6121	LM6221	LM6321	Units
				Limit (Notes 5, 9)	Limit (Note 5)	Limit (Note 5)	
A_{V1}	Voltage Gain 1	$R_L = 1\text{ k}\Omega$, $V_{IN} = \pm 10V$	0.990	0.980 0.970	0.980 0.950	0.970 0.950	V/V Min
A_{V2}	Voltage Gain 2	$R_L = 50\Omega$, $V_{IN} = \pm 10V$	0.900	0.860 0.800	0.860 0.820	0.850 0.820	
A_{V3}	Voltage Gain 3 (Note 6)	$R_L = 50\Omega$, $V^+ = 5V$ $V_{IN} = 2 V_{pp}$ ($1.5 V_{pp}$)	0.840	0.780 0.750	0.780 0.700	0.750 0.700	
V_{OS}	Offset Voltage	$R_L = 1\text{ k}\Omega$	15	30 50	30 60	50 100	mV Max
I_B	Input Bias Current	$R_L = 1\text{ k}\Omega$, $R_S = 10\text{ k}\Omega$	1	4 7	4 7	5 7	μA Max
R_{IN}	Input Resistance	$R_L = 50\Omega$	5				M Ω
C_{IN}	Input Capacitance		3.5				pF
R_O	Output Resistance	$I_{OUT} = \pm 10\text{ mA}$	3	5 10	5 10	5 6	Ω Max
I_{S1}	Supply Current 1	$R_L = \infty$	15	18 20	18 20	20 22	mA Max
I_{S2}	Supply Current 2	$R_L = \infty$, $V^+ = 5V$	14	16 18	16 18	18 20	
V_{O1}	Output Swing 1	$R_L = 1\text{ k}\Omega$	13.5	13.3 13	13.3 13	13.2 13	$\pm V$ Min
V_{O2}	Output Swing 2	$R_L = 100\Omega$	12.7	11.5 10	11.5 10	11 10	
V_{O3}	Output Swing 3	$R_L = 50\Omega$	12	11 9	11 9	10 9	
V_{O4}	Output Swing 4	$R_L = 50\Omega$, $V^+ = 5V$ (Note 6)	1.8	1.6 1.3	1.6 1.4	1.6 1.5	V_{pp} Min
PSSR	Power Supply Rejection Ratio	$V^{\pm} = \pm 5V$ to $\pm 15V$	70	60 55	60 50	60 50	dB Min

AC Electrical Characteristics

The following specifications apply for Supply Voltage = $\pm 15\text{V}$, $V_{\text{CM}} = 0$, $R_{\text{L}} \geq 100\text{ k}\Omega$ and $R_{\text{S}} = 50\Omega$ unless otherwise noted. **Boldface** limits apply for $T_{\text{A}} = T_{\text{J}} = T_{\text{MIN}}$ to T_{MAX} ; all other limits $T_{\text{A}} = T_{\text{J}} = 25^{\circ}\text{C}$.

Symbol	Parameter	Conditions	Typ	LM6121	LM6221	LM6321	Units
				Limit (Note 5)	Limit (Note 5)	Limit (Note 5)	
SR ₁	Slew Rate 1	$V_{\text{IN}} = \pm 11\text{V}$, $R_{\text{L}} = 1\text{ k}\Omega$	1200	550	550	550	V/ μs Min
SR ₂	Slew Rate 2	$V_{\text{IN}} = \pm 11\text{V}$, $R_{\text{L}} = 50\Omega$ (Note 7)	800	550	550	550	
SR ₃	Slew Rate 3	$V_{\text{IN}} = 2\text{ V}_{\text{PP}}$, $R_{\text{L}} = 50\Omega$ $V^{+} = 5\text{V}$ (Note 6)	50	550	550	550	
BW	−3 dB Bandwidth	$V_{\text{IN}} = \pm 100\text{ mV}_{\text{PP}}$, $R_{\text{L}} = 50\Omega$ $C_{\text{L}} \leq 10\text{ pF}$	50	30	30	30	MHz Min
t _r , t _f	Rise Time Fall Time	$R_{\text{L}} = 50\Omega$, $C_{\text{L}} \leq 10\text{ pF}$ $V_{\text{O}} = 100\text{ mV}_{\text{PP}}$	7.0				ns
t _{pd}	Propagation Delay Time	$R_{\text{L}} = 50\Omega$, $C_{\text{L}} \leq 10\text{ pF}$ $V_{\text{O}} = 100\text{ mV}_{\text{PP}}$	4.0				ns
O _S	Overshoot	$R_{\text{L}} = 50\Omega$, $C_{\text{L}} \leq 10\text{ pF}$ $V_{\text{O}} = 100\text{ mV}_{\text{PP}}$	10				%

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. DC and AC electrical specifications do not apply when operating the device beyond its rated operating conditions.

Note 2: During current limit or thermal limit, the input current will increase if the input to output differential voltage exceeds 8V. For input to output differential voltages in excess of 8V the input current should be limited to $\pm 20\text{ mA}$.

Note 3: The LM6121 series buffers contain current limit and thermal shutdown to protect against fault conditions.

Note 4: The thermal resistance θ_{JA} of the device in the N package is measured when soldered directly to a printed circuit board, and the heat-sinking pins (pins 1, 4, 5 and 8) are connected to 2 square inches of 2 oz. copper. When installed in a socket, the thermal resistance θ_{JA} of the N package is 84°C/W . The thermal resistance θ_{JA} of the device in the M package is measured when soldered directly to a printed circuit board, and the heat-sinking pins (pins 1, 2, 6, 7, 8, 9, 13, 14) are connected to 1 square inch of 2 oz. copper.

Note 5: Limits are guaranteed by testing or correlation.

Note 6: The input is biased to 2.5V and V_{IN} swings V_{PP} about this value. The input swing is 2 V_{PP} at all temperatures except for the A_V3 test at -55°C where it is reduced to 1.5 V_{PP} .












Note 7: Slew rate is measured with a $\pm 11\text{V}$ input pulse and 50 Ω source impedance at 25°C . Since voltage gain is typically 0.9 driving a 50 Ω load, the output swing will be approximately $\pm 10\text{V}$. Slew rate is calculated for transitions between $\pm 5\text{V}$ levels on both rising and falling edges. A high speed measurement is done to minimize device heating. For slew rate versus junction temperature see typical performance curves. The input pulse amplitude should be reduced to $\pm 10\text{V}$ for measurements at temperature extremes. For accurate measurements, the input slew rate should be at least 1700 V/ μs .

Note 8: The test circuit consists of the human body model of 120 pF in series with 1500 Ω .

Note 9: For specification limits over the full Military Temperature Range, see RETS6121X.


Note 10: The maximum power dissipation is a function of $T_{\text{J(max)}}$, θ_{JA} , and T_{A} . The maximum allowable power dissipation at any ambient temperature is $P_{\text{D}} = (T_{\text{J(max)}} - T_{\text{A}}) / \theta_{\text{JA}}$.

Typical Performance Characteristics $T_J = 25^\circ\text{C}$, unless otherwise specified



TL/H/9223-4

Typical Performance Characteristics $T_J = 25^\circ\text{C}$, unless otherwise specified (Continued)

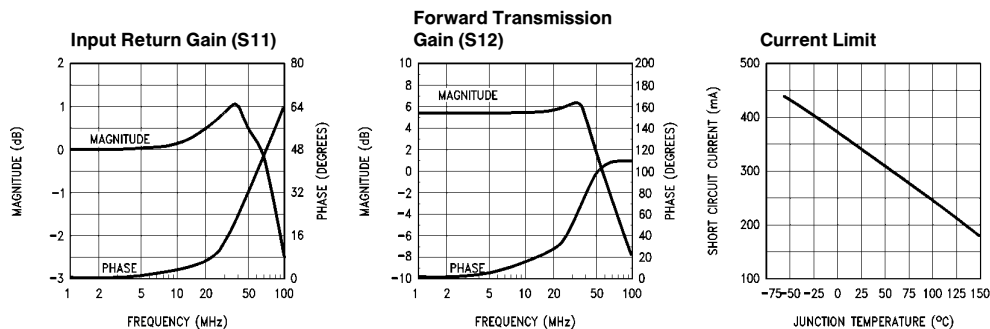

TL/H/9223-5

Application Hints

POWER SUPPLY DECOUPLING

The method of supply bypassing is not critical for stability of the LM6121 series buffers. However, their high current output combined with high slew rate can result in significant voltage transients on the power supply lines if much inductance is present. For example, a slew rate of $900 \text{ V}/\mu\text{s}$ into a 50Ω load produces a di/dt of $18 \text{ A}/\mu\text{s}$. Multiplying this by a wiring inductance of 50 nH (which corresponds to approximately $1\frac{1}{2}$ " of 22 gauge wire) result in a 0.9V transient. To minimize this problem use high quality decoupling very close to the device. Suggested values are a $0.1 \mu\text{F}$ ceramic in parallel with one or two $2.2 \mu\text{F}$ tantalums. A ground plane is recommended.

LOAD IMPEDANCE

The LM6121 is stable to any load when driven by a 50Ω source. As shown in the *Overshoot vs Capacitive Load* graph, worst case is a purely capacitive load of about 1000 pF . Shunting the load capacitance with a resistor will reduce overshoot.

SOURCE INDUCTANCE


Like any high frequency buffer, the LM6121 can oscillate at high values of source inductance. The worst case condition occurs at a purely capacitive load of 50 pF where up to 100 nH of source inductance can be tolerated. With a 50Ω load, this goes up to 200 nH . This sensitivity may be reduced at the expense of a slight reduction in bandwidth by adding a resistor in series with the buffer input. A 100Ω resistor will ensure stability with source inductances up to 400 nH with any load.

OVERVOLTAGE PROTECTION

The LM6121 may be severely damaged or destroyed if the Absolute Maximum Rating of 7V between input and output pins is exceeded.

If the buffer's input-to-output differential voltage is allowed to exceed 7V , a base-emitter junction will be in reverse-breakdown, and will be in series with a forward-biased base-emitter junction. Referring to the LM6121 simplified schematic, the transistors involved are Q1 and Q3 for positive inputs, and Q2 and Q4 for negative inputs. If any current is allowed to flow through these junctions, localized heating of the reverse-biased junction will occur, potentially causing damage. The effect of the damage is typically increased offset voltage, increased bias current, and/or degraded AC performance. Furthermore, this will defeat the short-circuit and over-temperature protection circuitry. Exceeding $\pm 7\text{V}$ input with a shorted output will destroy the device.

The device is best protected by the insertion of the parallel combination of a $100 \text{ k}\Omega$ resistor (R1) and a small capacitor (C1) in series with the buffer input, and a $100 \text{ k}\Omega$ resistor (R2) from input to output of the buffer (see Figure 1). This network normally has no effect on the buffer output. However, if the buffer's current limit or shutdown is activated, and the output has a ground-referred load of significantly less than $100 \text{ k}\Omega$, a large input-to-output voltage may be present. R1 and R2 then form a voltage divider, keeping the input-output differential below the 7V Maximum Rating for input voltages up to 14V . This protection network should be sufficient to protect the LM6121 from the output of nearly any op amp which is operated on supply voltages of $\pm 15\text{V}$ or lower.



TL/H/9223-6

FIGURE 1. LM6121 with Overvoltage Protection

Application Hints

HEATSINK REQUIREMENTS

A heatsink may be required with the LM6321 depending on the maximum power dissipation and maximum ambient temperature of the application. Under all possible operating conditions, the junction temperature must be within the range specified under Absolute Maximum Ratings.

To determine if a heatsink is required, the maximum power dissipated by the buffer, $P_D(\max)$, must be calculated. The formula for calculating the maximum allowable power dissipation in any application is $P_D = (T_J(\max) - T_A) / \theta_{JA}$. For the simple case of a buffer driving a resistive load as in Figure 2, the maximum DC power dissipation occurs when the output is at half the supply. Assuming equal supplies, the formula is $P_D = I_S (2V^+) + V^{+2} / 2 R_L$.




FIGURE 2

TL/H/9223-8

The next parameter which must be calculated is the maximum allowable temperature rise, $T_R(\max)$. This is calculated by using the formula:

$$T_R(\max) = T_J(\max) - T_A(\max)$$

where: $T_J(\max)$ is the maximum allowable junction temperature

$T_A(\max)$ is the maximum ambient temperature

Using the calculated values for $T_R(\max)$ and $P(\max)$, the required value for junction-to-ambient thermal resistance, θ_{JA} , can now be found:


$$\theta_{JA} = T_R(\max) / P(\max)$$

The heatsink for the LM6321 is made using the PC board copper. The heat is conducted from the die, through the lead frame (inside the part), and out the pins which are soldered to the PC board. The pins used for heat conduction are:


TABLE I

Part	Package	Pins
LM6321N	8-Pin DIP	1, 4, 5, 8
LM6321M	14-Pin SO	1, 2, 3, 6, 7, 8, 9, 13, 14

Figure 3 shows copper patterns which may be used to dissipate heat from the LM6321.



TL/H/9223-9



TL/H/9223-10

*For best results, use $L = 2H$


FIGURE 3. Copper Heatsink Patterns

Table II shows some values of junction-to-ambient thermal resistance (θ_{JA}) for values of L and W for 2 oz. copper:


TABLE II

Package	L (in.)	H (in.)	θ_{JA} ($^{\circ}\text{C}/\text{W}$)
8-Pin DIP	2	0.5	47
14-Pin SO	1	0.5	69
	2	1	57

Physical Dimensions inches (millimeters)

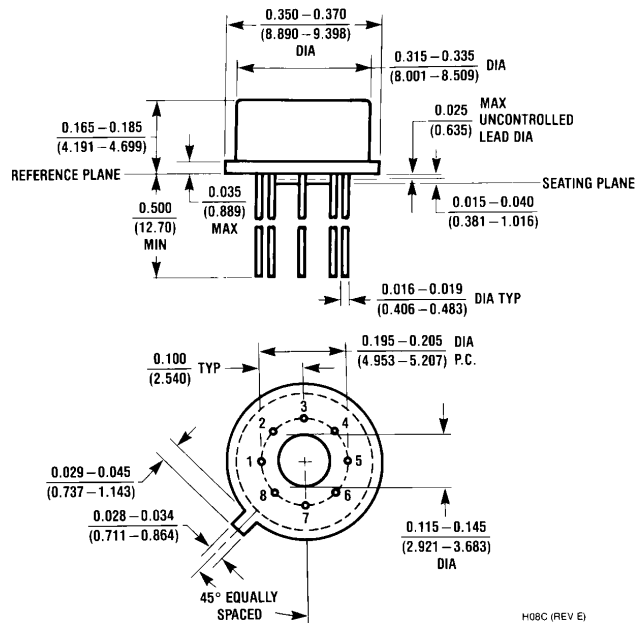


Metal Can Package (H)
Order Number LM6221H or LM6121H/883
NS Package Number H08C

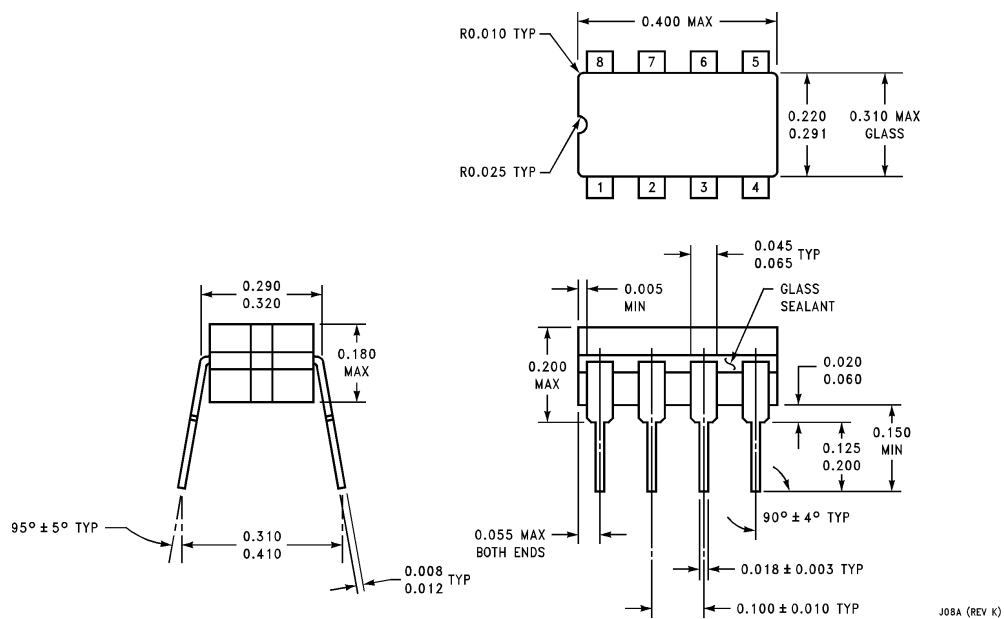

8-Pin Ceramic Dual-In-Line Package (J)
Order Number LM6121J/883
NS Package Number J08A

Physical Dimensions inches (millimeters) (Continued)

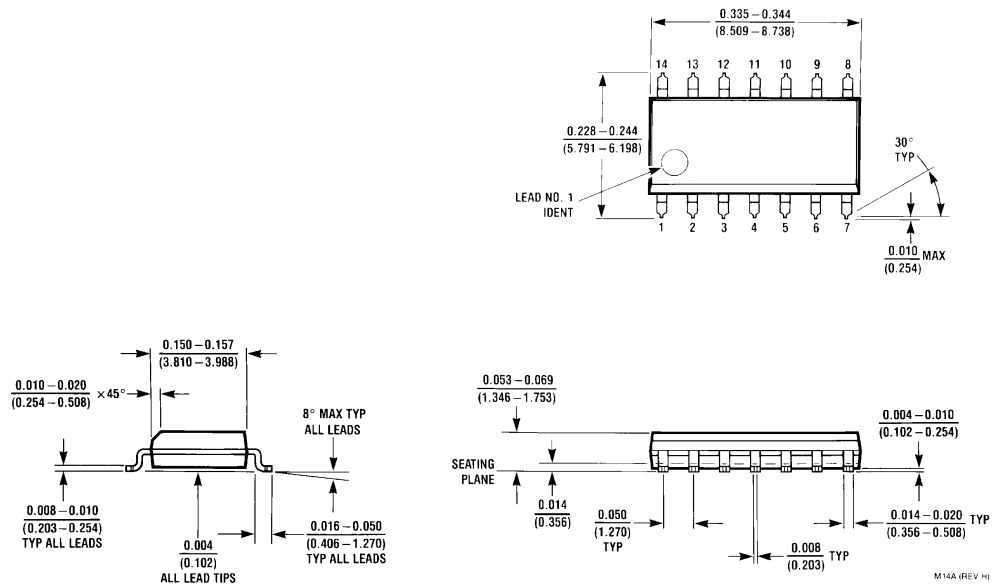


14-Pin Small Outline Package (M)
Order Number LM6321M
NS Package Number M14A

M14A (REV H)

Physical Dimensions inches (millimeters) (Continued)

Lit. # 108239

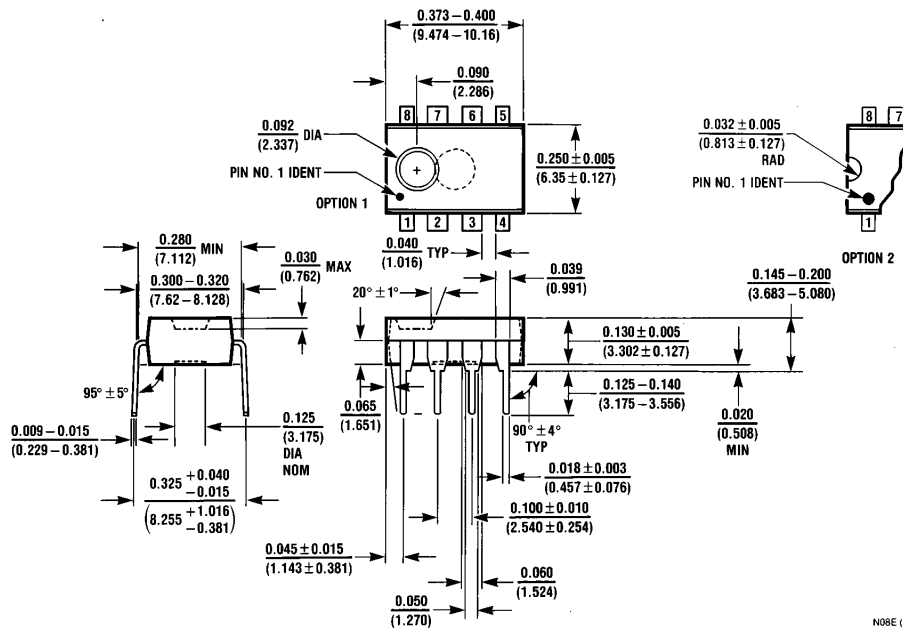

Molded Dual-In-Line Package (N)
Order Number LM6221N or LM6321N
NS Package Number N08E

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
 2900 Semiconductor Drive
 P.O. Box 58090
 Santa Clara, CA 95052-8090
 Tel: (408) 272-9959
 TWX: (910) 339-9240

National Semiconductor GmbH
 Livny-Gargan-Str. 10
 D-82256 Fürstenfeldbruck
 Germany
 Tel: (81-41) 35-0
 Telex: 527849
 Fax: (81-41) 35-1

National Semiconductor Japan Ltd.
 Sumitomo Chemical Engineering Center
 Bldg. 7F
 1-7-1, Nakase, Mihama-Ku
 Chiba-City,
 Chiba Prefecture 261
 Tel: (043) 299-2300
 Fax: (043) 299-2500

National Semiconductor Hong Kong Ltd.
 13th Floor, Straight Block,
 Ocean Centre, 5 Canton Rd.
 Tsimshatsui, Kowloon
 Hong Kong
 Tel: (852) 2737-1600
 Fax: (852) 2736-9960

National Semicondutores Do Brazil Ltda.
 Rue Deputado Lacorda Franco
 120-3A
 Sao Paulo-SP
 Brazil 05418-000
 Tel: (55-11) 212-5066
 Telex: 391-1131931 NSBR BR
 Fax: (55-11) 212-1181

National Semiconductor (Australia) Pty. Ltd.
 Building 16
 Business Park Drive
 Monash Business Park
 Nottingham, Melbourne
 Victoria 3168 Australia
 Tel: (3) 558-9999
 Fax: (3) 558-9998

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.