

4

3

2

1

LOC	DIST	REVISIONS					
P	LTR	DESCRIPTION			DATE	DWN	APVD
		REVISED PER ECO-11-004587			11MAR11	RK	HMR




MATERIALS:
HOUSING: POLYAMIDE, UL94V-0, BLACK.
TERMINALS: COPPER ALLOY, TIN PLATED.
SCREWS: STEEL, ZINC PLATED, UNLESS OTHERWISE STATED.

ELECTRICAL:
RATING: 20A, UL & CSA.


MECHANICAL:
WIRE RANGE: 12-22 AWG.
MAXIMUM TIGHTENING TORQUE: 7 IN-LBS.

ENVIRONMENTAL:
CONTINUOUS OPERATING TEMP.: -40°C TO +105°C

- 1 PRELIMINARY PART NUMBER.
- 2 SCREWS ARE NICKEL PLATED BRASS.

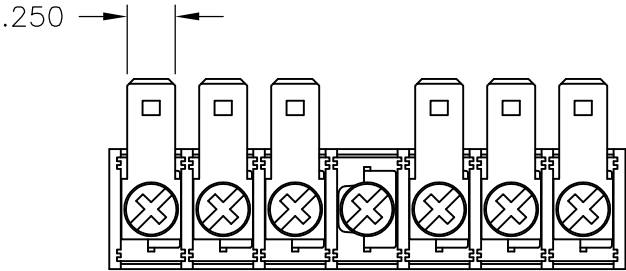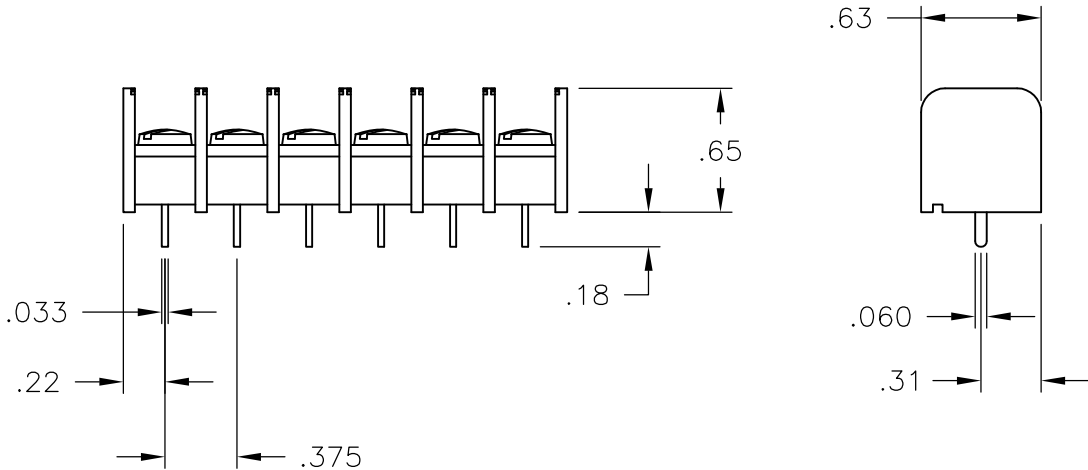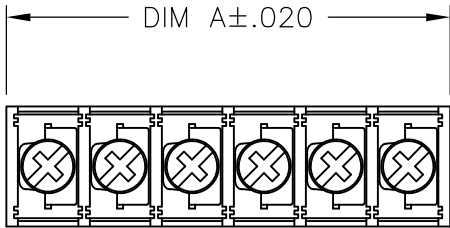

1546834-6

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 8/17/04	 TE Connectivity						
		CHK S YODER 8/17/04							
		APVD S YODER 8/17/04							
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME NC6-P107-XX ASSEMBLY					
		0 PLC ± -							
		1 PLC ± -							
		2 PLC ± .02							
		3 PLC ± .010							
		4 PLC ± -		SIZE CAGE CODE DRAWING NO RESTRICTED TO					
		ANGLES ± -							
MATERIAL		FINISH		A300779C-1437664-4 —					
—		—							
CUSTOMER DRAWING				SCALE NTS		SHEET 1 OF 1		REV B1	