



How to change optical 2K filter

About 30sec for changing in 3 steps


1: loosen one screw
Note: no need remove

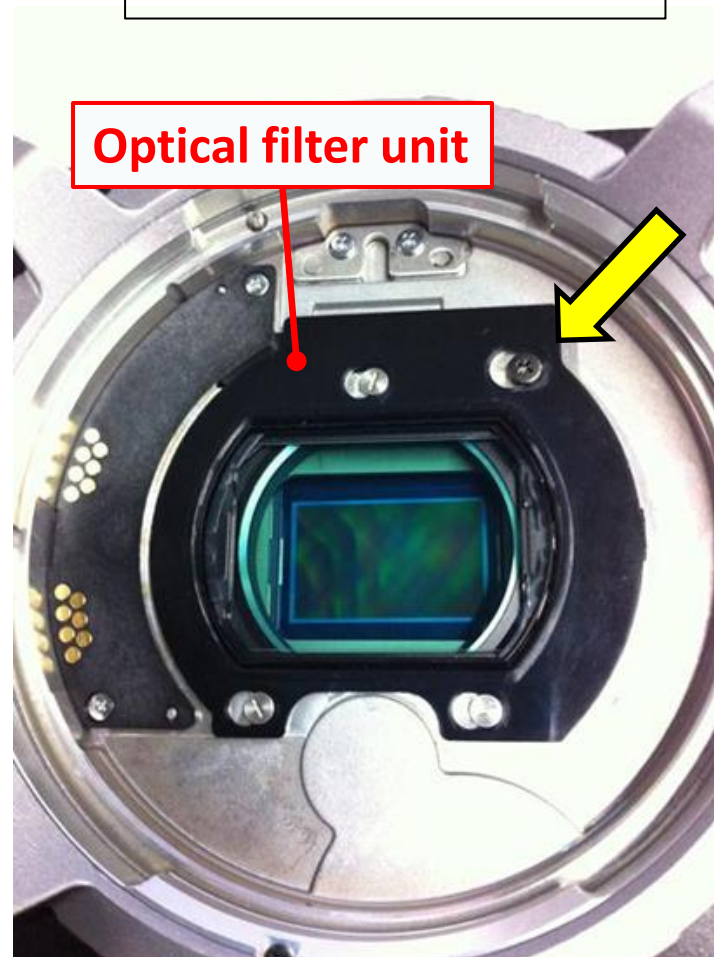

2: Slide Optical filter unit

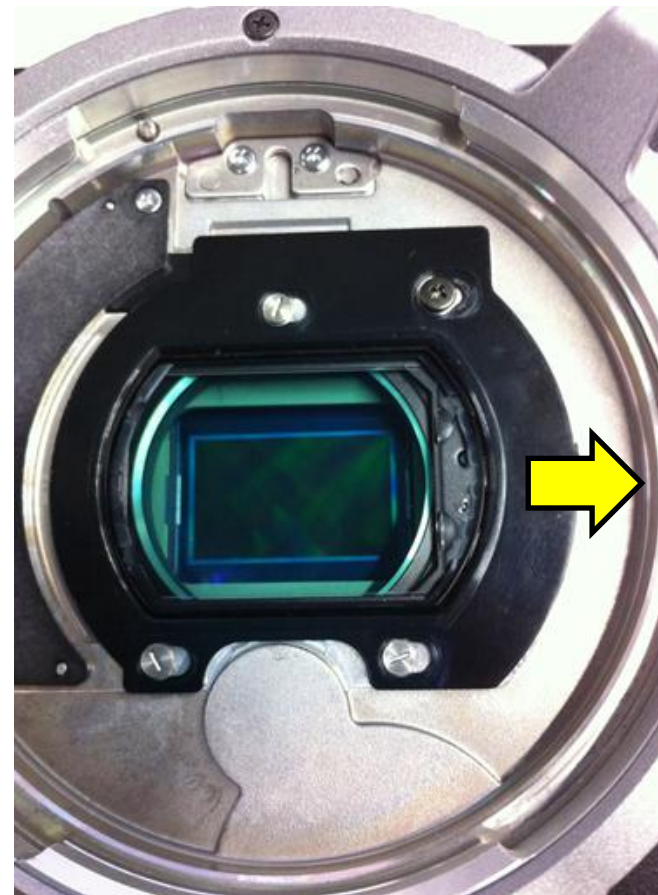

3: Put off Optical filter unit

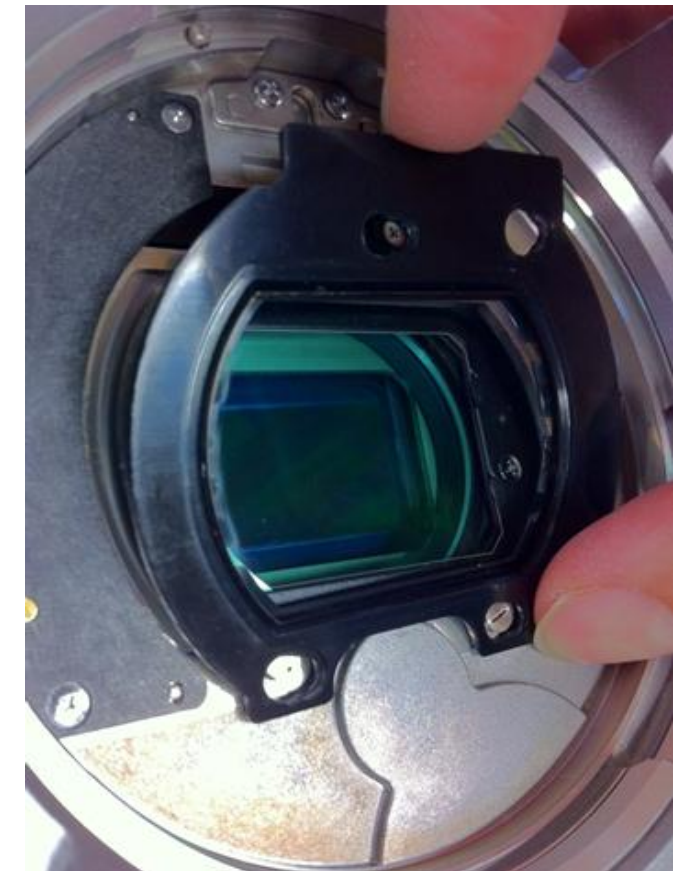

Camera module behind optical filter is delicate zone. Please take care dusts coming into.

Design

- Curved “2K Filter” on upper area for easy distinction
- Curved the attention about detaching
- Automatically detects which filter is attached by a sensor
- Display the Filter attached on Status and Menu(TBD)

