




PNAST 7/16"
PNAST 1/2"
PNAST 5/8"

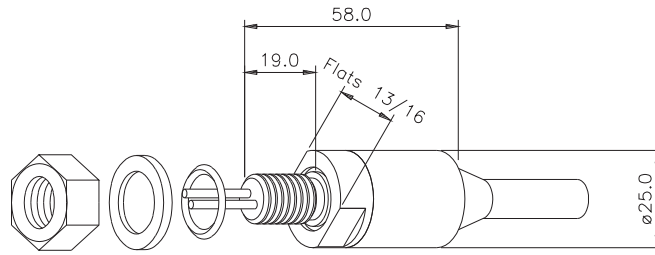

PNARA 3/8"
PNARA 7/16"
PNARA 1/2"

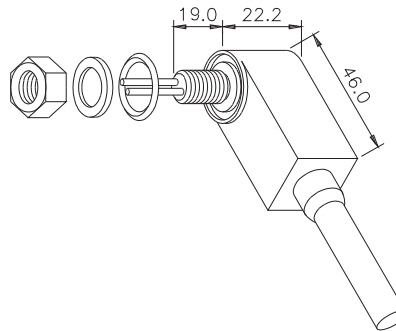

PNARA 3/4"

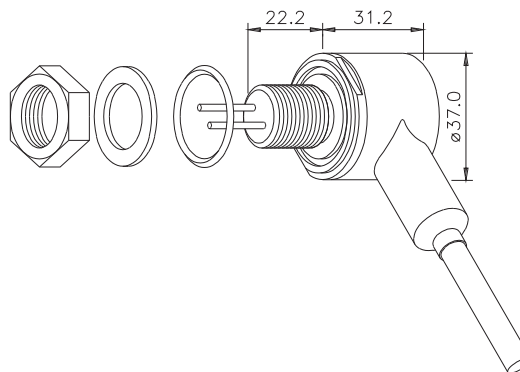

Type	Max. wire quantity and size	Thread size	O-Ring	Standard Material Specification	Dimensions in mm. Threads in inches.
PNAST 7/16"	Max. 7x18 AWG	7/16"x20UNF	12.42x1.78 (2-014)	Connector Body : Neoprene (CR)	1 inch = 25.4 mm.
PNAST 1/2"	Max. 8x18 AWG	1/2"x20UNF	14.00x1.78 (2-015)	Bulkhead Body : Brass UNS-C36000	1 mm = 0.03937 inch.
PNAST 5/8"	Max. 8x18 AWG	5/8"x18UNF	17.17x1.78 (2-017)	Leads (30 cm) : 18 AWG 1,0 mm ² Teflon	Modification rights reserved
PNARA 3/8"	Max. 4x18 AWG or 8x22 AWG	3/8"x24UNF	12.42x1.78 (2-014)	Penetrator Specification	Drawing No. SE 300-26
PNARA 7/16"	Max. 7x18 AWG	7/16"x20UNF	12.42x1.78 (2-014)	Insulation Resistance : >200 megaohm	
PNARA 1/2"	Max. 7x18 AWG	1/2"x20UNF	14.00x1.78 (2-015)	Temp. Rating : -4 to +60 degr. C	
PNARA 3/4"	Max. 8x18 AWG or 16x22 AWG	3/4"x16UNF	25.12x1.78 (2-022)	Depth Rating : 500 bar - 7.000 psi	