


SYNTHETIC PULLING AND STOPPING GRIP (PATENT PENDING)

Yale Grips install easily on varying diameters.



YaleGrips are available in all sizes shown below, each of which is color-coded for easy identification. Each grip additionally carries a serialized tag for tracking purposes.

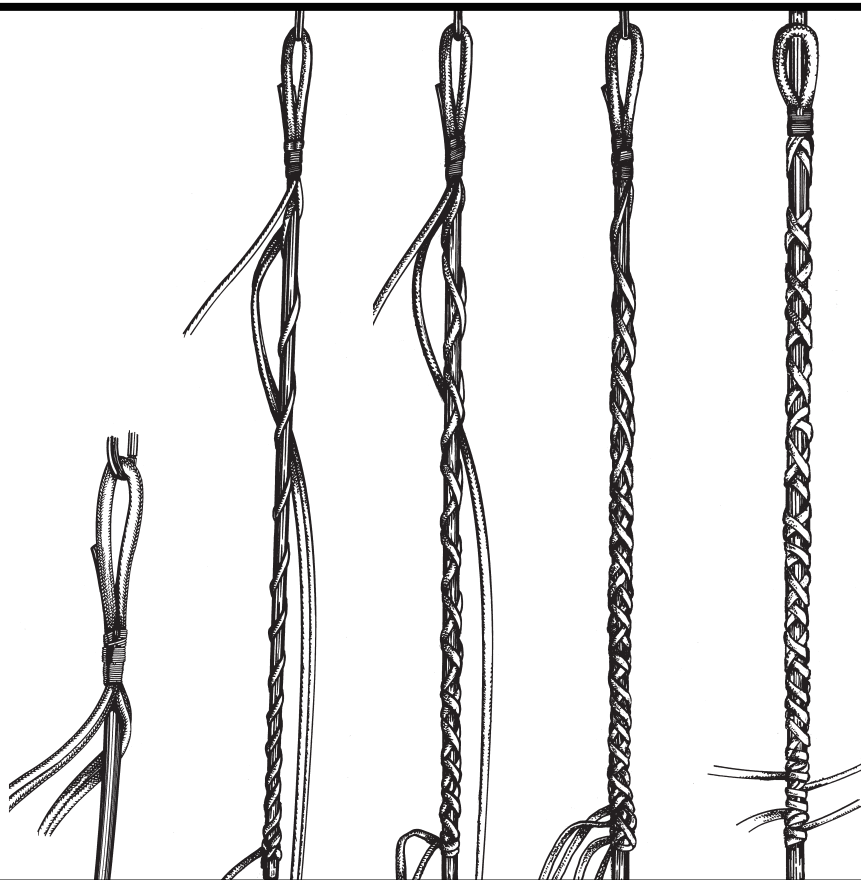

YaleGrips™ are made from a Technora® flat braid—an Aramid fiber—assembled in a four-leg configuration extending from a reinforcing, securing eye. The eye is covered entirely with an extra layer of braid, which is saturated with Maxijacket™ urethane, abrasion-resistant coating for extended life.

YaleGrips are used as pulling and stopping grips for electrical-line construction work above and below ground, for deployment and retrieval of a variety of cables, as marine stoppers on hawsers, and for temporary or permanent strain relief. YaleGrips are applied quickly over a wide range of cable diameters without specialized tools. YaleGrips are non-corrosive, have good dielectric properties, and are compact and lightweight. Installed, the grip remains flexible and does less damage to mating surfaces than other types of grips. YaleGrips do not form dangerous “fishhooks,” as do wire mesh grips, making them safer to handle.

YaleGrips may be used for temporary or permanent eyes, both in midspan or on the end.

Options include: urethaning the entire grip, which extends the grip’s life, especially useful in active towing applications. We call this the “marine treatment.” We also can make a grip with extended tails to accommodate larger cables. Hardware can be added to the eye, such as stainless thimbles, which enhance performance.

Size the grip by anticipated loads, not by the cable size they fit. When the anticipated load needs to be spread over a wider surface area, a six-leg grip is suggested. Please call or write to us for a quotation.

technora®
The Power of Aramid

YALEGRIP DATA FOR APPLICATIONS ON:

EYE DIA ("D")	TECHNORA PART NUMBER	MINIMUM CABLE DIA.	MAXIMUM CABLE DIA.	AVERAGE BREAK STRENGTH (in thousands of lbs.)	WORK LOAD (in thousands of lbs.)	TAIL LENGTH ("L")	EYE SIZE ("E")	COLOR
7/16"	944504T	3/16"	1/2"	6	1.2	4.5 FT.	6"	RED
9/16"	944505T	1/4"	3/4"	12	2.4	5.5 FT.	6"	BLUE
1 1/16"	944506T	3/8"	7/8"	18	3.6	6.5 FT.	6"	GREEN
7/8"	944507T	1/2"	1"	30	6	8 FT.	8"	ORANGE
1"	944508T	5/8"	1-1/8"	48	9.6	10 FT.	8"	YELLOW
1-1/4"	944509T	7/8"	1-3/4"	72	14.4	16 FT.	12"	BLACK
1-1/2"	944510T	1-1/8"	3"	120	24	22 FT.	16"	RED
1-3/4"	944511T	1-3/8"	3-1/2"	180	36	28 FT.	18"	BLUE
2"	944512T	2"	4"	290	58	34 FT.	18"	GREEN

2-1/4" and greater is available. Call Yale for details.

YaleGrip™ applies quickly to a wide range of cable diameters without specialized tools.