







TOP VIEW




BOTTOM VIEW



END VIEWS

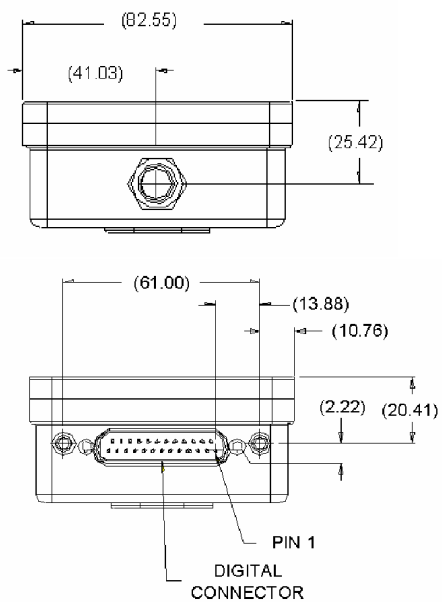

SIDE VIEW

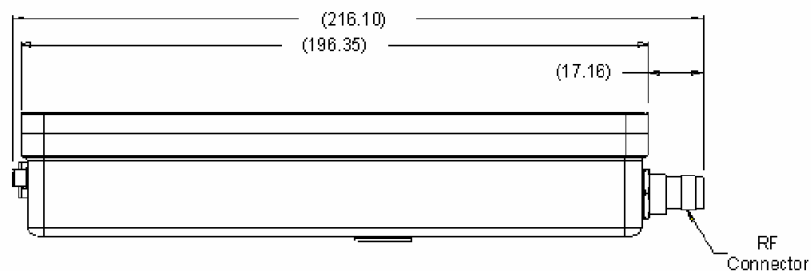

NOTE: all dimensions are in millimeters (mm)

Pin assignments for the 25-pin D-subminiature connector

PIN #	SIGNAL	DESCRIPTION
3	GND	External power ground
4	EXT (+)*	External power input
7	RI	Ring indicator
8	RTS	Request to send
9	S_TX	Data transmit
10	DCD	Data carrier detect
13	S_RX	Data receive
19	DTR	Data terminal ready
21	DSR	Data set ready
22	CTS	Clear to send
23	GND	RS232 ground

* Input voltage can range from 3.6VDC to 5.0VDC

Specifications:

Weight: 1.3 pounds
Dimensions: 7.7" L x 3.3" W x 1.5" D
SIM Card Reader: Internal
Operating Frequency: 1616 – 1626.5MHz
Operating Temperature: –30°C/+60°C
Duplexing Method: Time Division Duplex
Multiplexing Method: TDMA/FDMA
Link Margin (w/ external antenna): 12.5 dB average