


XTREME GREENTM CAT 5e

FALMAT'S ALL NEW
Underwater Network Data/Power Cables

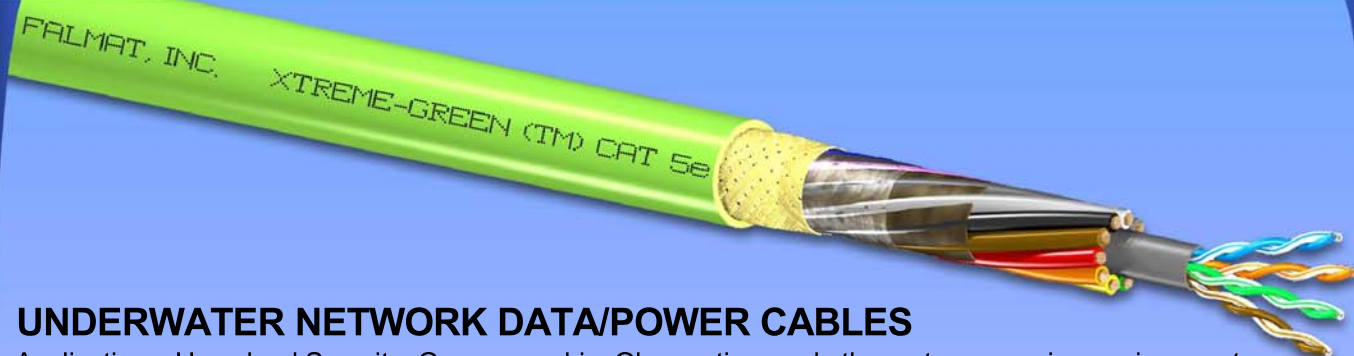

UNDERWATER NETWORK DATA/POWER CABLES

Applications: Homeland Security, Oceanographic, Observation, and other extreme marine environments.

Part Number	Power Comp	Data Comp **	Break Strength	Diameter	Wgt/1000'
FMXCAT51205K24	5C- 12AWG	Cat 5e -24awg	2400 lbs	.700"	256 lbs
FMXCAT51207K24	7C- 12AWG	Cat 5e -24awg	2400 lbs	.700"	297 lbs
FMXCAT51606K24	6C- 16AWG	Cat 5e -24awg	2400 lbs	.564"	157 lbs
FMXCAT51610K24	10C-16AWG	Cat 5e -24awg	2400 lbs	.564"	191 lbs
FMXCAT51812K12	12C-18AWG	Cat 5e -24awg	1200 lbs	.500"	143 lbs
FMXCAT51806K12	6C- 18AWG	Cat 5e -24awg	1200 lbs	.500"	110 lbs
FMXCAT52218K12	18C-22AWG	Cat 5e -24awg	1200 lbs	.447"	120 lbs
FMXCAT52218	18C-22AWG	Cat 5e -24awg	0	.433"	117 lbs
FMXCAT52824K8	24C-28AWG	Cat 5e -24awg	800 lbs	.415"	90 lbs
FMXCAT52824	24C-28AWG	Cat 5e -24awg	0	.400"	88 lbs
FMXCAT50000 *	N/A	Cat 5e -24awg	0	.325"	47 lbs
FMXCAT50000K12 *	N/A	Cat 5e -24awg	1200 lbs	.340"	52 lbs

* Cat 5 cable only, with rugged Xtreme-GreenTM Polyurethane, no power conductors, or water-block.

** Stranded conductors for added flexibility.

Data Network/Power Composite Cables featuring:

- Extreme ruggedness, yet flexible water-blocked construction.
- Designed for underwater use with high-speed network data, video, and sensor equipment.
- Cables can be used for bottom-laid, vertical deployment, winch systems, and ROV applications.
- Our Cat 5e 4 pair stranded conductors meets or exceeds TIA 568-B. Suitable for 10Base-T and 100Base-T.
- Custom variations of these listed cables can be supplied with added breaking strength, steel armor package, additional jackets, or neutrally buoyant constructions.

Xtreme-GreenTM Cat Cables are designed to maintain their flexibility in harsh and challenging environments. These cables feature Falmat's specially formulated "Xtreme-grade" polyurethane jacket for easier payout, tighter bends, and better tractor control with extremely low coefficient of friction. The Xtreme-GreenTM Cat cables with reduced diameter offer even smaller bend radius for tighter bends and compact, portable handling systems.



1873 DIAMOND STREET SAN MARCOS, CA 92078 U.S.A.
TEL: (760) 471-5400 FAX: (760) 471-4970 WEB: WWW.FALMAT.COM