


***NEW 360 Degree Continuous
Rotating Hydraulic Torque Wrench***

SPIN-TORQ® IL360

- ***Fastest Torque Wrench on Market***
- ***Uses Standard Hydraulic Power Unit***
- ***Operates on 200 to 2500 PSI***
- ***2 to 20 Gallons Per Minute***
- ***Fully Reversible Without
Removing from the Nut***
- ***Power Can Be Applied In Clockwise
or Counterclockwise Rotation***




- ***Hex Inserts & Stack Sockets
Available***
- ***Works in Tight Quarters***
- ***Long Studs Protruding Through
the Nut - No Problem***
- ***Manual or Robotic Control***

US Patent # 6,305,236 B1

- ***Rugged Stainless Steel Body***
- ***Only Two Moving Parts in Wrench Head***
- ***Operates at up to 10 RPM***



- ***Single Hydraulic Motor Powers Multiple Wrench Head Sizes***
- ***Hex Inserts & Stack Sockets Available***

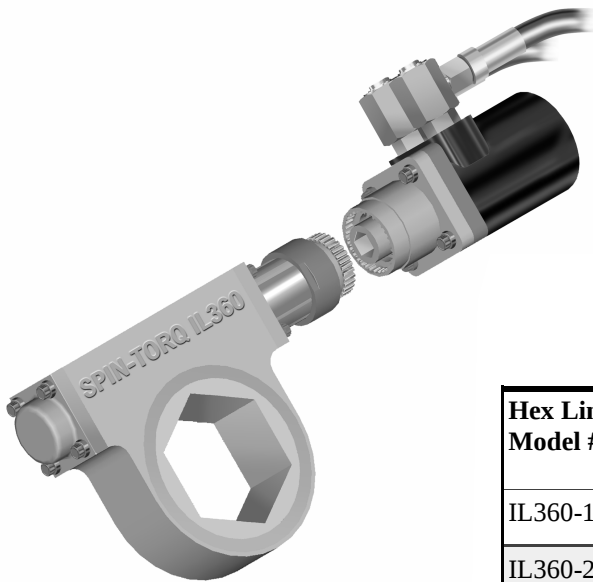

Width of the wrench is slightly wider than the height of the nut in each size to allow for work in tight areas.

Fits most ANSI & API Flanges.

Hex Link Model #	Hex Size		Torque Range	
	(in)	(mm)	(Ft-Lb)	(N-M)
IL360-113	1-13/16	46	200 - 700	270 - 950
IL360-200	2	50	200 - 900	270 - 1,220
IL360-203	2-3/16	55	300 - 1,200	400 - 1,630
IL360-206	2-3/8	60	400 - 1,600	540 - 2,170
IL360-209	2-9/16	65	600 - 2,200	800 - 3,000
IL360-212	2-3/4	70	800 - 2,800	1,100 - 3,800
IL360-215	2-15/16	75	1,000 - 3,400	1,350 - 4,600
IL360-302	3-1/8	80	1,200 - 4,000	1,630 - 5,420
IL360-308	3-1/2	89	1,400 - 5,000	1,900 - 6,780
IL360-314	3-7/8	98	2,100 - 7,000	2,850 - 9,500

Additional sizes available. Let us know about your special applications.

US Patent # 6,305,236 B1