

SEACON

MINI-CON / Micro MINI-CON

UNDERWATER ELECTRICAL DRY-MATE CONNECTORS



TE
connectivity

SEACON



MINI-CON

UNDERWATER ELECTRICAL DRY-MATE CONNECTORS

SECTION	PAGE
MINI-CON SERIES	
Introduction	MIN 3
Availability	MIN 3
Applications	MIN 3
Testing	MIN 3
Part Number System	MIN 3
General Information	MIN 4
Standard MINI-CON Configurations	MIN 4
Reversed MINI-CON Connectors (V-MIN)	MIN 4
Fiber Optic MINI-CON Connectors	MIN 4
Self Wiping MINI-CON Connectors	MIN 4
MINI-CON PBOF	MIN 4
High Pressure Connectors	MIN 5
Field Installation	MIN 5
Recommended Tightening Torque.....	MIN 5
Pressure Ratings	MIN 5
Exploded View (MIN-BCR / CCR)	MIN 6
Dimension Details:	
MIN-BCR	MIN 7
MIN-FCR	MIN 8
MIN-BCR-DO (DUAL O-RING)	MIN 9
MIN-CCR	MIN 10
MIN-CCP	MIN 10
Product News - MINI-CON Dummy Connectors	MIN 11
MIN-DSR/MIN-DSRL (LONG)	MIN 12
MIN-DSP/MIN-DSPL (LONG)	MIN 12
MIN-PSR/MIN-PSRL (LONG)	MIN 12
MIN-PSP/MIN-PSPL (LONG).....	MIN 12
MIN-CCP-PBOF-HP.....	MIN 13
MIN-CCP-PBOF-HP-RA	MIN 13
MIN-CCR-PBOF-HP.....	MIN 14
MINI-CON Master Parts and Materials List	MIN 15
Maximum Cable O.D	MIN 15
Contact Configurations	MIN 16-18
Reversed (VMIN) Contact Configurations	MIN 19
Fiber Optic Contact Configurations	MIN 20
Micro MINI-CON SERIES SECTION	MIN 21-26

INTRODUCTION

SEACON's well established MINI-CON range was originally developed for the purpose of supplying small diameter, high density and high pressure connectors. Dry mateable, this connector series is manufactured from 316 Stainless Steel as standard, although other materials are available upon request including Titanium and Monel™. The inserts are manufactured from Glass Reinforced Epoxy (GRE) with copper alloy, gold plated contacts although glass sealed inserts are also available for high pressure applications. The MINI-CON series also offers optical and hybrid versions along with PBOF, PBOF-HP (High Pressure), reversed miniature inserts and self wiping miniatures. For more information please refer to pages 4-5 of this brochure.

AVAILABILITY

With the introduction of the MIN-D and MIN-E connectors, the MINI-CON connector series is now available in 13 shell sizes with 1 to 203 contacts including coax and has a pressure rating of upto 20,000 psi (approximately 45,000 ft/13,700m).

APPLICATIONS

The MINI-CON range has been supplied to numerous Naval programs and has become the connector choice for a number of navies around the world. Other applications include drilling systems, umbilical links and ROV's.

TESTING

Before the MINI-CON series was first introduced, it underwent type approval testing and since then the range has been subjected to additional testing for specific projects or programs, some of which are listed below:

Environmental**Salt Spray (Corrosion)**

- Tested in accordance with MIL-STD-202, Method 101.

Humidity (Steady State)

- Tested in accordance with MIL-STD-202, Method 103.

Thermal Shock

- Tested in accordance with MIL-STD-202, Method 107.

Hydrostatic Pressure

- Tested in accordance with MIL-STD-1344, Method 1006.

Physical**Underwater Explosion Shock**

- Tested in accordance with MIL-S-901, High Impact, Heavy Weight.

Vibration (Mechanical)

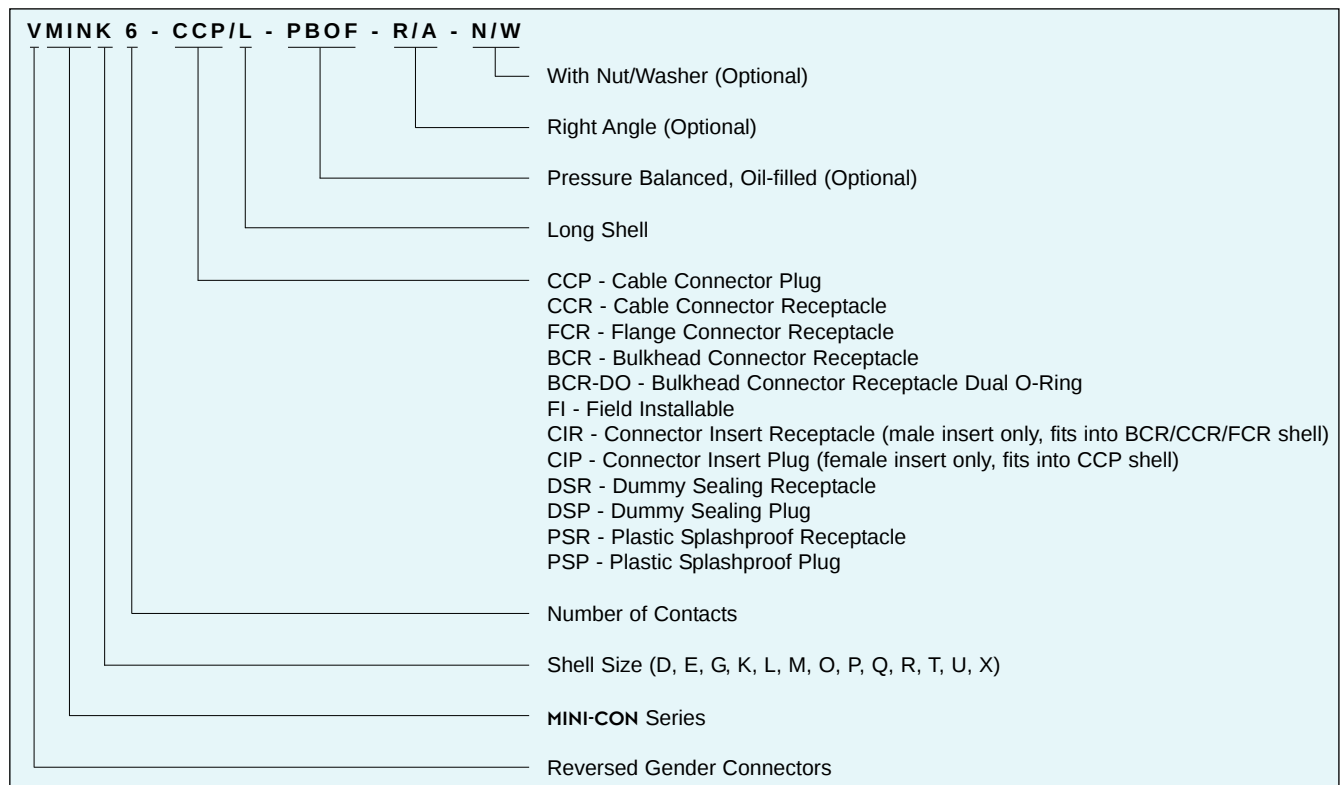
- Tested in accordance with MIL-STD-167, Type 1.

Electrical**Dielectric Withstanding Voltage**

- Tested in accordance with MIL-STD-202, Method 301.

Insulation Resistance

- Tested in accordance with MIL-STD-202, Method 302.

PART NUMBER SYSTEM - EXAMPLE

GENERAL INFORMATION

COMPONENT	MATERIAL
BULKHEAD BODY (BCR/FCR)	316 Stainless Steel
CCP BODY	316 Stainless Steel c/w CA630 engaging nut
CONTACT INSERT	Glass filled epoxy per B/A XS-2748
ELECTRICAL CONTACTS	Copper alloy gold plated per MIL-G-45204
ENGAGING NUT	CA630
O-RING	Nitrile (formerly known as Buna N)

CATEGORY	VALUE
MATED PRESSURE	Varies by product up to 20,000 psi Mated and potted depending on shell material
VOLTAGE	600 VDC as standard although higher voltage ratings are available. Please contact SEACON for further information
CURRENT RATING	Up to 23 amps dependent on contact size and cable

OPTIONS:

- Pressure Balanced Oil Filled (PBOF).
- Higher voltages.
- Field installable boots.
- Coax and fiber optic hybrids.
- Custom keying.
- Connector/cable terminations.
- Pigtails on bulkhead connectors.
- Pressure Balanced Oil Filled (PBOF) termination and assembly.
- Open face pressure ratings and testing.
- Available in alternative materials: Aluminum, Titanium, Monel™, PEEK (Polyetheretherketone) etc.

NOTES:

- Connectors are designed for installation on one atmosphere vessels. Please contact SEACON for recommendations if using compensated vessels.

STANDARD MINI-CON CONFIGURATIONS

The below table shows our standard configurations that are more cost effective and more readily available. For further details please contact SEACON.

CONNECTOR	G	K	M	O
BCR	10#22; 7#20	19#22; 10#20; 4#16	37#22; 26#20; 3#14; 4#10; 10#16	On Request
CCP	10#22; 7#20	19#22; 10#20; 4#16	37#22; 26#20; 3#14; 4#10; 10#16	56#22; 44#20
CCPL	On Request	19#22; 10#20; 4#16	37#22; 26#20; 3#14; 4#10; 10#16	On Request
FCR	10#22; 7#20	19#22; 10#20; 4#16	37#22; 26#20; 3#14; 4#10; 10#16	56#22; 44#20
FCRL	On Request	19#22; 10#20; 4#16	37#22; 26#20; 3#14; 4#10; 10#16	On Request

REVERSED MINI-CON CONNECTORS (V-MIN)

The "V" before the MIN prefix in the Part Numbering System (see page 3) represents a reversed miniature insert. Many of our bulkhead connectors are available with sockets instead of pins and the corresponding cable plugs have pins instead of sockets.

Reversed MINI-CON's are an option for applications that require design of cabling/harnessing systems to be electrically sound with respect to "power on" safety requirements.

NOTE:

Reversal of sockets and pins may not be required as the pins in the standard bulkhead connectors are recessed approximately one quarter of an inch (1/4"). Please refer to the contact configurations page for further information or contact SEACON for recommendations on your specific application.

FIBER OPTIC MINI-CON CONNECTORS

As organizations in the subsea industry continue to develop more applications with fiber optic technology in mind, there has been a dramatic increase in the quality and complexity of electro-optic connector configurations required to suit these applications. Multi-channel hybrid connectors are finding increased usage in sonar and surveillance systems, real time video applications, ROV's/AUV's and geophysical search equipment to name but a few of the industries taking advantage of the latest fiber optic connection technology.

In order to serve the changing needs of it's customers, SEACON has developed a complete range of fiber optic products built to withstand a variety of environmental conditions, including hydrostatic pressure, thermal and explosive shock and vibration. As well as developing fiber optics for specific customer requirements, SEACON has added fiber optic capabilities to existing electrical connector designs including the MINI-CON range. For further information please see the MINI-CON fiber optic contact configurations on page 20 and our Optical Hybrid Dry-Mate products section.

SELF WIPING MINI-CON CONNECTORS

We have developed self wiping connectors to meet two requirements. First, the rubber wipers at each socket location help clean the respective insulator around each male pin. This can help to remove contaminants or moisture that would otherwise lead to a low insulation resistance fault. Second, these connectors have a longer arcing path because of the wiper section and therefore can be rated for much higher voltages than would otherwise be possible in a connector of the same diameter. Please contact SEACON for additional information and availability.

MINI-CON PBOF

The time proven MINI-CON PBOF connector system has been upgraded. The new line which is called the MINI-CON-PBOF-HP (High Pressure) has actually been in service with some of our customers for the last fifteen years. At this time, it is replacing the traditional MINI-CON PBOF across the board. The HP version will intermate with all previous MINI-CON PBOF connectors but some components are different from before. For this reason, if you need replacement connector components, please contact SEACON for those needs. For new applications, the HP connectors will be delivered.

As with previous MINI-CON PBOF connectors, the HP design utilizes a high contact density layout. The HP style transfers the load without a valve by bearing on the insert. This is similar to a valve type system in that the force from the high pressure fluid in the hose is transferred to the bulkhead connector. We realize that our customers have many different applications for this type of system. Please contact us with your requirements and we can quote the appropriate bulkhead connector for your application.

HIGH PRESSURE CONNECTORS

The **MINI-CON** series can be manufactured with Titanium or high strength material shells which will increase the mated pressure rating to 20,000 psi mated. For high open face pressure ratings, most **MINI-CON** bulkhead connectors can be manufactured with a Glass Sealed Contact Insert Receptacle (CIR). These inserts consist of gold plated pins, compression glass sealed in a type 316 Stainless Steel contact web. Our standard glass sealed **MINI-CON**'s are rated at 10,000 psi, open face, or greater depending on the particular connector. These inserts are a direct replacement for our standard epoxy inserts and may be ordered separately. They may be used in the Titanium shells mentioned above, or in standard shells. Please contact **SEACON** for further information on ratings.

FIELD INSTALLATION

Most of the **MINI-CON** CCP & CCR connectors are available for field installation. This capability is accomplished by installing our field installation boot as shown on the drawing of page 10. The boot is molded of neoprene compound and is designed for sealing onto the cable and the connector shell. In order for the boot to accomplish its sealing task, the cable must be completely round, solid and free of any nicks, indentations or voids. Optional hose clamps prevent accidentally dislodging the boot. When ordering the field installable boot please specify the exact cable diameter as the hole in the boot is made specifically according to the cable diameter to allow a proper compression fit.

PRESSURE RATINGS


All **MINI-CON** connectors and dummies, when mated, are pressure rated as follows:

These pressure ratings are for our standard 316 Stainless Steel connectors. Higher ratings may be achieved with alternate materials. Please contact **SEACON** for further information.

RECOMMENDED TIGHTENING TORQUE

1. Only qualified technicians should perform engagement and torquing operations.
2. Torque values are maximum value. Values given are for dry threads (non-lubricated). The BCR torque rating assumes a dry, metal customer housing. If a non-metallic housing is used, torque requirements will be lower. Consult **SEACON** for additional information.
3. Utilize inspection hole in engaging nuts to ensure complete engagement.
4. During engagement it may be necessary to use up to 50% of the engaging nut torque value.
5. After complete engagement a torque of up to the maximum listed value may be applied to ensure engaging nut will not disengage during use.

SIZE	NON-PBOF	PBOF
MIND	16,000	NOT AVAILABLE
MINE	16,000	NOT AVAILABLE
MING	16,000	3,000
MINK	12,000	3,000
MINL	12,000	3,000
MINM	12,000	3,000
MINO	10,000	3,000
MINP	10,000	2,000
MINQ	6,500	2,000
MINR	6,500	2,000
MINT	6,500	NOT AVAILABLE
MINU	6,500	NOT AVAILABLE
MINX	6,500	NOT AVAILABLE

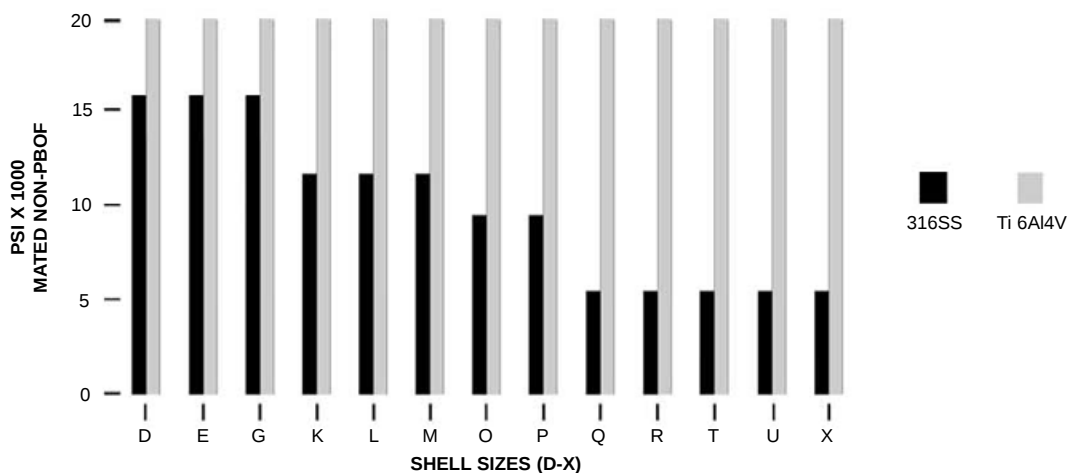


The above information is based on **SEACON** terminations which are available on request.

NOTE:



Connectors are designed for installation on one atmosphere vessels. Please contact **SEACON** for recommendations if using compensated vessels.

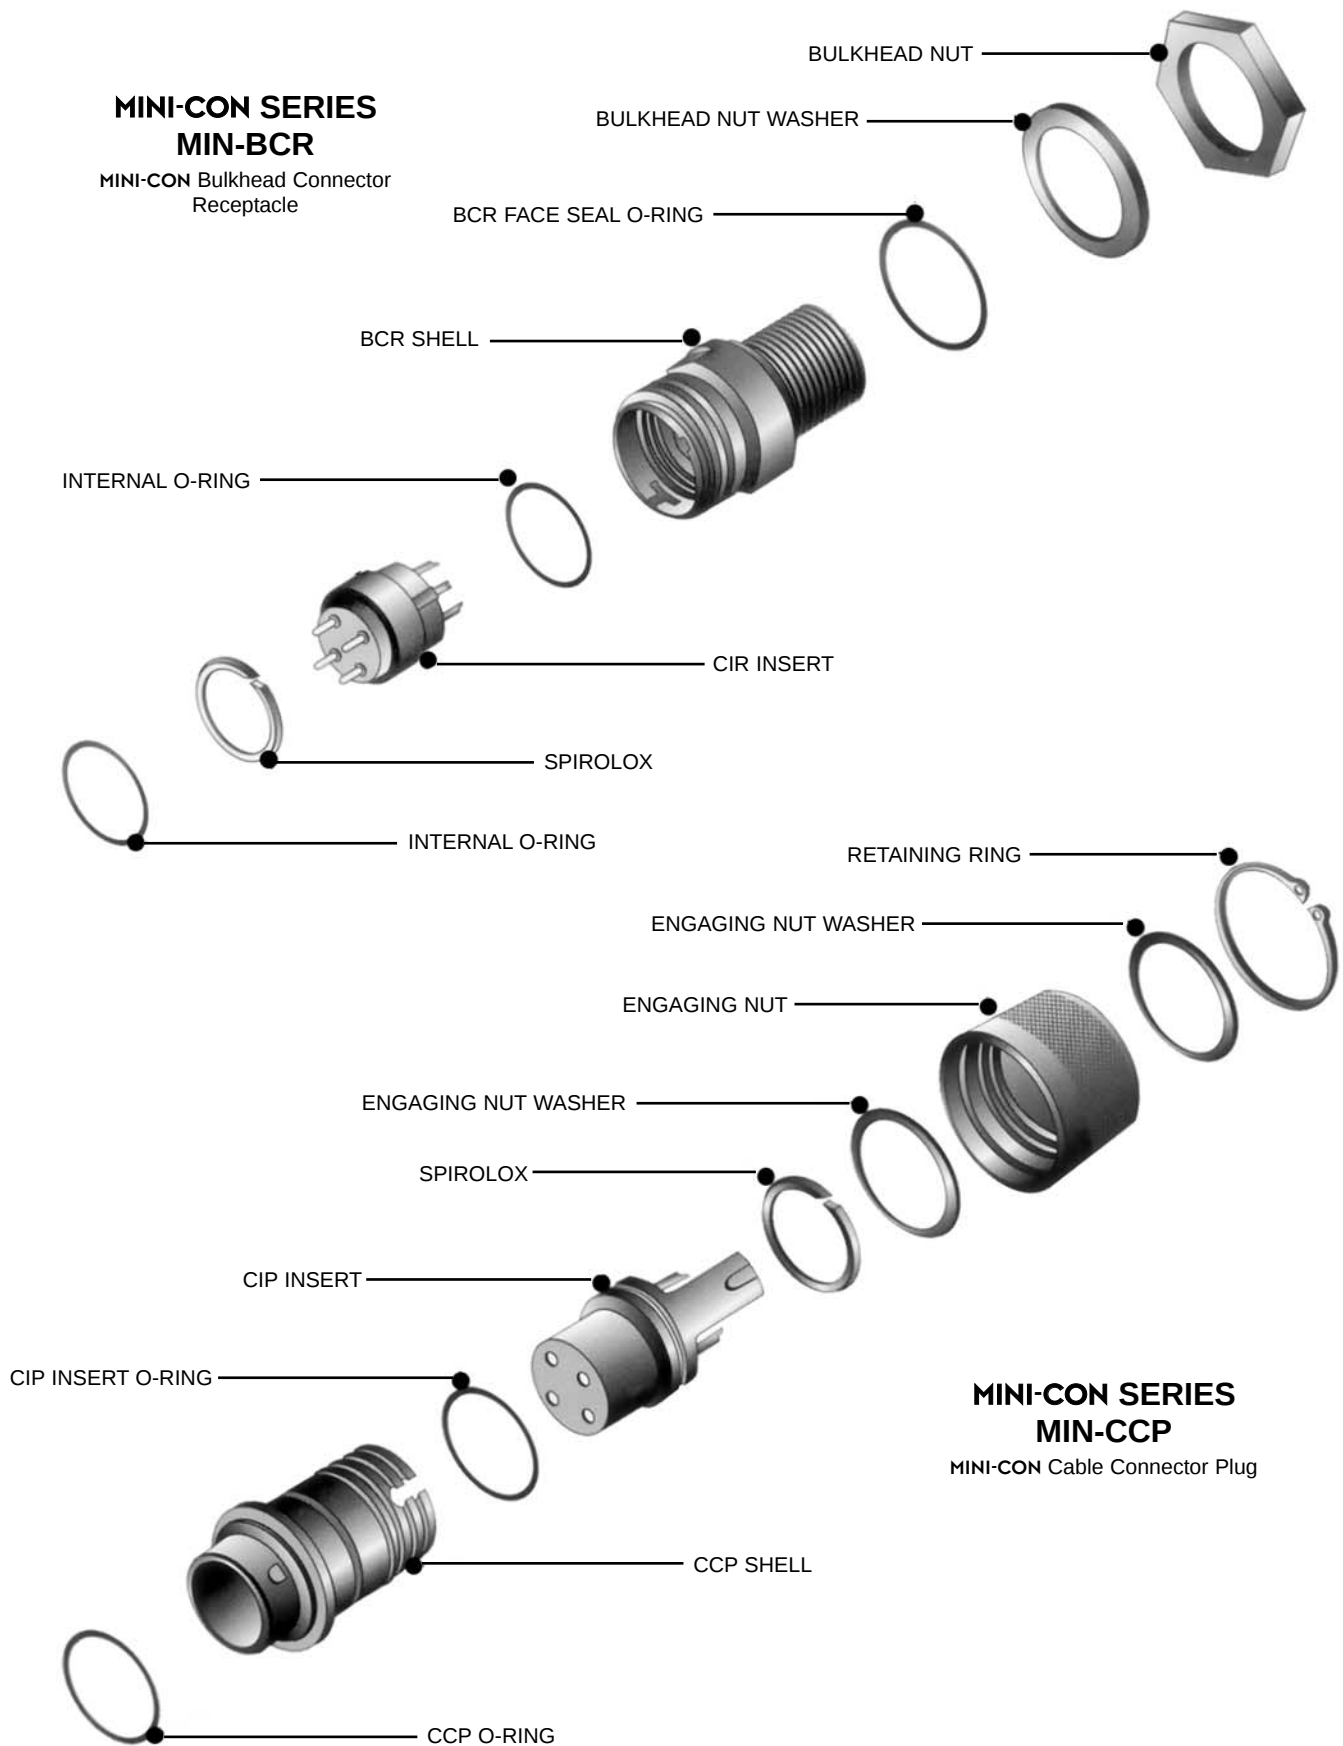MINI-CON SERIES EXPLODED VIEW



MINI-CON SERIES MIN-BCR

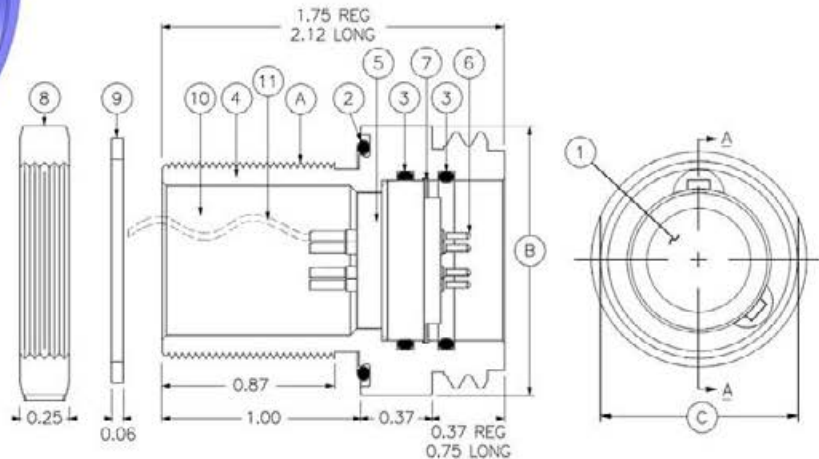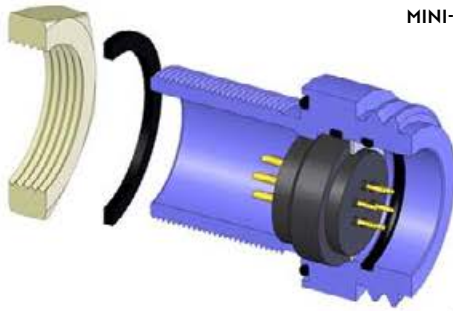MINI-CON Bulkhead Connector Receptacle
Mates with MIN-CCP
Dummy Connector: MIN-DSP




SECTION A-A

CONNECTOR	A - MOUNTING THREAD	B - Ø (INCHES)	2 - O-RING	7 - SPIROLOX	3 - O-RING	C - WRENCH FLATS (INCHES)	8 - HEX NUT ACROSS FLATS (INCHES)	8 - HEX NUT ACROSS POINTS (INCHES)	9 - WASHER OD (INCHES)
MIND-BCR	3/8-24 UNF-2A	0.75	2-013	VH-31	2-011	0.62	0.62	0.72	0.62
MINE-BCR	1/2-20 UNF-2A	0.87	2-015	VH-43	2-013	0.75	0.75	0.86	0.75
MING-BCR	5/8-24 UNEF-2A	1.00	2-018	UR50	2-014	0.87	0.88	1.00	0.88
MINK-BCR	3/4-20 UNEF-2A	1.12	2-019	UR62	2-016	1.00	1.00	1.16	1.00
MINL-BCR	7/8-20 UNEF-2A	1.25	2-021	UR75	2-018	1.12	1.13	1.31	1.13
MINM-BCR	1-20 UNEF-2A	1.37	2-023	UR81	2-019	1.25	1.25	1.44	1.25
MINO-BCR	1 1/8-16 UN-2A	1.62	2-026	UR106	2-023	1.50	1.50	1.75	1.50
MINP-BCR	1 1/4-16 UN-2A	1.75	2-028	UR118	2-025	1.62	1.63	1.88	1.63
MINQ-BCR	1 3/8-16 UN-2A	1.87	2-029	UR137	2-028	1.75	1.75	2.00	1.75
MINR-BCR	1 1/2-16 UN-2A	2.00	2-029	UR150	2-029	1.87	1.88	2.16	1.88
MINT-BCR	2-16 UN-2A	2.50	2-034	UR175	2-031	2.37	2.38	2.75	2.38
MINU-BCR	2 1/4-16 UN-2A	2.75	2-036	UR200	2-033	2.62	2.63	3.03	2.63
MINX-BCR	2 3/4-16 UN-2A	3.50	2-041	UR250	2-037	3.15	3.16	3.63	3.16


BCR MOUNTING INFORMATION

SIZE	BORE Ø +0.015 -0.000 (INCHES)	BCR/L MOUNTING TORQUE* (INCH-POUNDS)
D	0.375	30-35
E	0.500	50-55
G	0.625	65-85
K	0.750	75-100
L	0.875	90-110
M	1.000	120-150
O	1.125	130-160
P	1.250	140-170
Q	1.375	150-180
R	1.500	170-220
T	2.000	210-250
U	2.250	220-260
X	2.750	240-280

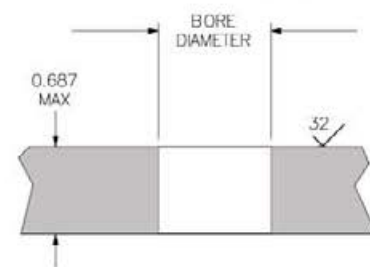THROUGH BORE OPTION



THREADED MOUNTING OPTION




NOTES:

- * Torque specified is for dry metal threads.
- For contact configurations please refer to pages 16-20.
- When ordering MIN-BCR you receive: 2, 3, 4, 5, 6, 7. Please refer to the MINI-CON master parts and materials list on page 15.
- Nut and washer are optional.
- Bore must be perpendicular to spot face.
- Spotface diameter to be equal or greater than the connector diameter.
- If threaded mount is used, lead thread chamfer is not to exceed diameter shown in bore column.

MINI-CON SERIES MIN-FCR

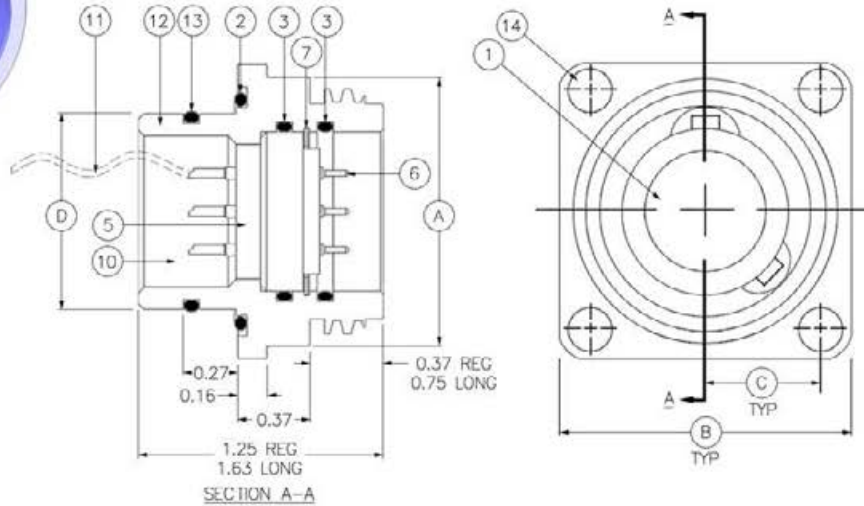
MINI-CON Flange Connector Receptacle
Mates with MIN-CCP
Dummy Connector: MIN-DSP



CONNECTOR	A - Ø (INCHES)	B - SQUARE (INCHES)	C - MOUNTING HOLE LOCATION (INCHES)	D - Ø (INCHES)	13 - O-RING	7 - SPIROLOX	2 - O-RING	SOCKET HEAD CAPSCREW	3 - O-RING
MIND-FCR	0.75	0.87	0.335	0.373	2-010	VH-31	2-013	4-40 UNC-2A	2-011
MINE-FCR	0.87	1.00	0.387	0.498	2-012	VH-43	2-015	4-40 UNC-2A	2-013
MING-FCR	1.00	1.12	0.453	0.685	2-015	UR50	2-018	4-40 UNC-2A	2-014
MINK-FCR	1.12	1.25	0.510	0.748	2-016	UR62	2-019	6-32 UNC-2A	2-016
MINL-FCR	1.25	1.37	0.562	0.873	2-018	UR75	2-021	6-32 UNC-2A	2-018
MINM-FCR	1.37	1.50	0.593	0.998	2-020	UR81	2-023	8-32 UNC-2A	2-019
MINO-FCR	1.62	1.75	0.723	1.123	2-022	UR106	2-026	8-32 UNC-2A	2-023
MINP-FCR	1.75	1.87	0.777	1.248	2-024	UR118	2-028	8-32 UNC-2A	2-025
MINQ-FCR	1.87	2.00	0.831	1.373	2-026	UR137	2-029	10-24 UNC-2A	2-028
MINR-FCR	2.00	2.12	0.884	1.498	2-028	UR150	2-029	10-24 UNC-2A	2-029
MINT-FCR	2.50	2.62	1.043	1.998	2-032	UR175	2-034	1/4-20 UNC-2A	2-031
MINU-FCR	2.75	2.87	1.113	2.248	2-034	UR200	2-036	1/4-20 UNC-2A	2-033
MINX-FCR	3.50	3.62	1.470	2.748	2-038	UR250	2-041	3/8-16 UNC-2A	2-037

FCR MOUNTING INFORMATION

SIZE	BORE Ø +0.002 -0.000 (INCHES)	CHAMFER Ø ±0.010 (INCHES)	SPOTFACE Ø ±0.015 * (INCHES)	SPOTFACE Ø ±0.015 ** (INCHES)
D	0.375	0.425	0.69	1.18
E	0.500	0.550	0.87	1.37
G	0.687	0.727	1.00	1.56
K	0.750	0.800	1.12	1.75
L	0.875	0.915	1.25	1.87
M	1.000	1.040	1.31	2.12
O	1.125	1.175	1.50	2.44
P	1.250	1.290	1.62	2.62
Q	1.375	1.425	1.81	2.81
R	1.500	1.540	1.87	3.00
T	2.000	2.050	2.50	3.75
U	2.250	2.290	2.75	4.00
X	2.750	2.800	3.31	5.06


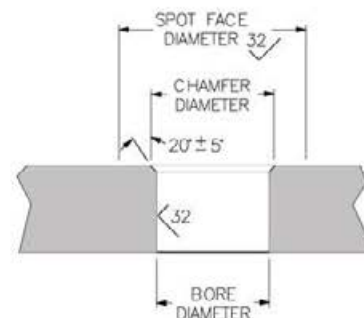


NOTES:

- For contact configurations please refer to pages 16-20.
- When ordering MIN-FCR you receive: 2, 3, 5, 6, 7, 12, 13. Please refer to the MINI-CON master parts and materials list on page 15.
- Screw caps are not included.
- * This dimension is to be used if spotface is less than or equal to 0.001 inches deep.
- ** This dimension is to be used if spotface is greater than 0.001 inches deep.
- Chamfer is to be 20° ± 5°.
- Bore must be perpendicular to spot face.

MINI-CON SERIES MIN-BCR-DO (DUAL O-RING)

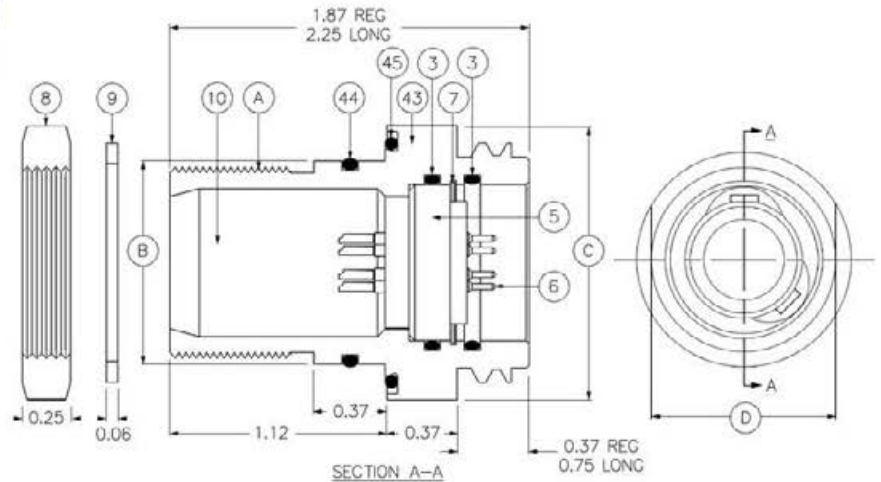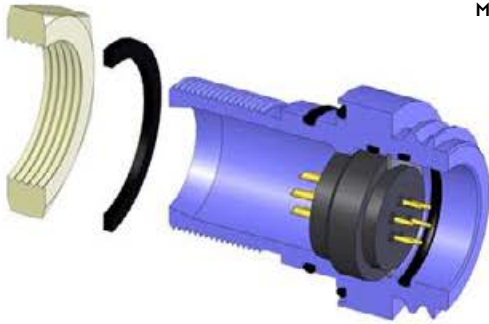
MINI-CON Bulkhead Connector Receptacle
Mates with MIN-CCP
Dummy Connector: MIN-DSP



CONNECTOR	A - MOUNTING THREAD	B - Ø (INCHES)	C - SQUARE (INCHES)	D - WRENCH FLATS (INCHES)	44 - O-RING	45 - O-RING	3 - O-RING	7 - SPIROLOX	8 - HEX NUT ACROSS FLATS (INCHES)	8 - HEX NUT ACROSS POINTS (INCHES)	9 - WASHER OD (INCHES)
MIND-BCR-DO	3/8-24 UNF-2A	0.435	0.81	0.68	2-011	2-015	2-011	VH-31	0.62	0.72	0.62
MINE-BCR-DO	1/2-20 UNF-2A	0.498	0.93	0.81	2-013	2-017	2-013	VH-43	0.75	0.86	0.75
MING-BCR-DO	5/8-24 UNEF-2A	0.685	1.06	0.93	2-015	2-019	2-014	UR50	0.87	1.00	0.88
MINK-BCR-DO	3/4-20 UNEF-2A	0.810	1.18	1.06	2-017	2-020	2-016	UR62	1.00	1.16	1.00
MINL-BCR-DO	7/8-20 UNEF-2A	0.935	1.31	1.18	2-019	2-022	2-018	UR75	1.12	1.31	1.13
MINM-BCR-DO	1-20 UNEF-2A	1.060	1.43	1.31	2-021	2-024	2-019	UR81	1.25	1.44	1.25
MINO-BCR-DO	1 1/8-16 UN-2A	1.185	1.68	1.56	2-023	2-027	2-023	UR106	1.50	1.75	1.50
MINP-BCR-DO	1 1/4-16 UN-2A	1.310	1.81	1.68	2-025	2-029	2-025	UR118	1.62	1.88	1.63
MINQ-BCR-DO	1 3/8-16 UN-2A	1.435	1.93	1.81	2-027	2-030	2-028	UR137	1.75	2.00	1.75
MINR-BCR-DO	1 1/2-16 UN-2A	1.623	2.06	1.93	2-029	2-031	2-029	UR150	1.87	2.16	1.88
MINT-BCR-DO	2-16 UN-2A	2.123	2.62	2.43	2-033	2-035	2-031	UR175	2.37	2.75	2.38
MINU-BCR-DO	2 1/4-16 UN-2A	2.373	3.00	2.68	2-035	2-037	2-033	UR200	2.75	3.03	2.63
MINX-BCR-DO	2 3/4-16 UN-2A	2.873	3.62	3.22	2-039	2-041	2-037	UR250	3.25	3.63	3.16

BCR-DO MOUNTING INFORMATION

SIZE	BORE Ø +0.002 -0.000 (INCHES)	CHAMFER Ø ±0.010 (INCHES)	BCR/L MOUNTING TORQUE (INCH-POUNDS)
D	0.437	0.487	30-35
E	0.562	0.612	50-55
G	0.687	0.737	65-85
K	0.812	0.862	75-100
L	0.937	0.987	90-110
M	1.062	1.112	120-150
O	1.187	1.237	130-160
P	1.312	1.362	140-170
Q	1.437	1.487	150-180
R	1.625	1.675	170-220
T	2.125	2.175	210-250
U	2.375	2.425	220-260
X	2.875	2.925	240-280

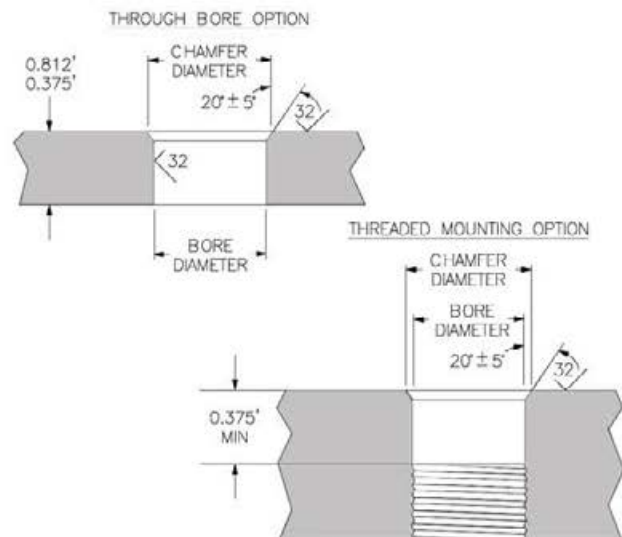


NOTES:

- For contact configurations please refer to pages 16-20.
- When ordering MIN-BCR-DO you receive: 2, 3, 5, 6, 7, 12, 43, 44, 45. Please refer to the MINI-CON master parts and materials list on page 15.
- Nut and washer are optional.
- Bore must be perpendicular to spot face.
- Spotface diameter to be equal or greater than the connector diameter.
- If threaded mount is used, thread must be concentric with bore.

MINI-CON SERIES MIN-CCR

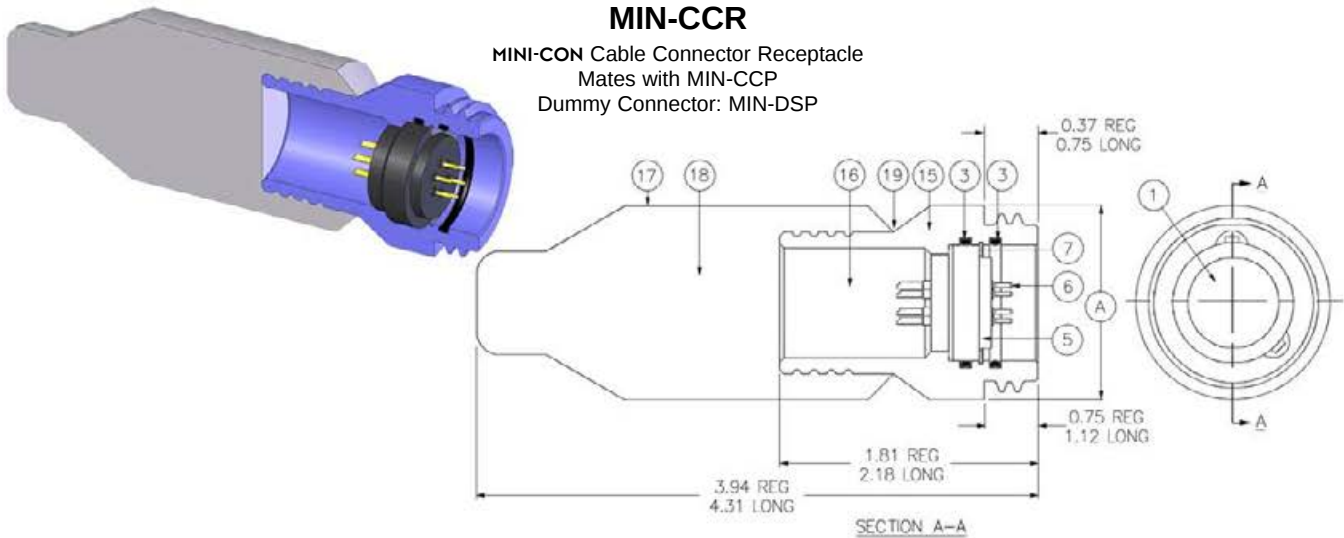
MINI-CON Cable Connector Receptacle
Mates with MIN-CCP
Dummy Connector: MIN-DSP



CONNECTOR	A - Ø (INCHES)	3 - O-RING	7 - SPIROLOX	23 - RETAINING RING	24 - O-RING	25 - O-RING	26 - SPIROLOX	R/A HEIGHT (INCHES)	REAR SHELL OD (INCHES)
MIND-CCR* / CCP	0.75	2-011	VH-31	D1400-0120	2-012	2-010	VH-37	2.25	0.473***
MINE-CCR* / CCP	0.87	2-013	VH-43	D1400-0150	2-014	2-012	UR50	2.25	0.595***
MING-CCR / CCP	1.00	2-014	UR50	5100-68	2-015	2-013	UR56	2.63/3.00	0.687
MINK-CCR / CCP	1.12	2-016	UR62	5100-78	2-017	2-015	UR68	2.63/3.00	0.781
MINL-CCR / CCP	1.25	2-018	UR75	5100-87	2-019	2-016	UR75	2.63/3.00	0.875
MINM-CCR / CCP	1.37	2-019	UR81	5100-100	2-020	2-018	UR87	2.81/3.18	1.000
MINO-CCR / CCP	1.62	2-023	UR106	5100-118	2-024	2-020	UR100	2.81/3.18	1.187
MINP-CCR / CCP	1.75	2-025	UR118	5100-131	2-027	2-022	UR112	3.00/3.37	1.312
MINQ-CCR / CCP	1.87	2-028	UR137	5100-150	2-028	2-025	UR131	3.00/3.37	1.500
MINR-CCR / CCP	2.00	2-029	UR150	5100-156	2-029	2-026	UR137	3.19/3.56	1.562
MINT-CCR / CCP	2.50	2-031	UR175	5100-187	2-032	2-029	UR162	varies w/cable	1.875
MINU-CCR / CCP	2.75	2-033	UR200	5100-206	2-033	2-031	UR187	varies w/cable	2.062
MINX-CCR / CCP	3.50	2-037	UR250	5100-268	2-038	2-033	UR212	varies w/cable	2.687

MINI-CON SERIES MIN-CCP

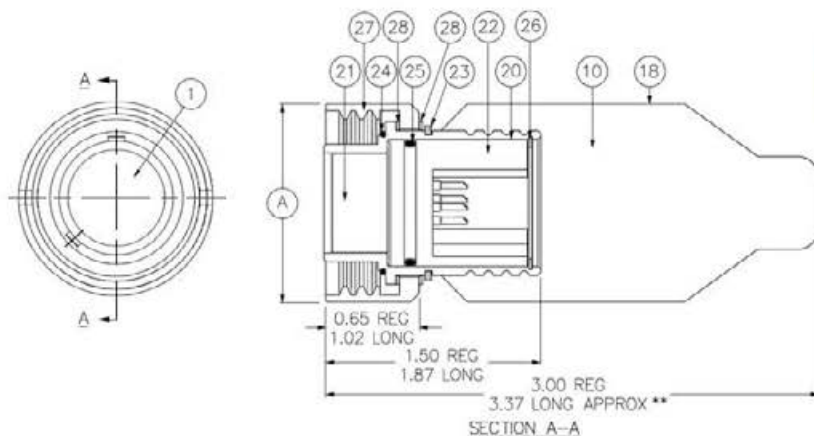MINI-CON Cable Connector Plug
Mates with MIN-BCR/FCR/CCR
Dummy Connector: MIN-DSR



NOTES:

- For contact configurations please refer to pages 16-20.
- For maximum cable O.D please refer to page 15.
- When ordering MIN-CCR you receive: 3, 5, 6, 7, 15. When ordering MIN-CCP you receive: 20, 21, 22, 23, 24, 25, 26, 27, 28. Please refer to the **MINI-CON** master parts and materials list on page 15.
- * BCR may be used as a CCR. CCR is not available at this time for the MIND and MINE sizes.
- ** Will vary with cable size.
- *** CCP's only. CCR's is TBA.
- **** During engaging it may be necessary to use 50% of the engaging nut torque value.
- Molding is optional.
- Field Installable Boot is available and cable diameter must be specified at time of order.

CCP/L ENGAGING NUT TORQUE INFORMATION

SIZE	CCP/L ENGAGING NUT TORQUE **** (INCH-POUNDS)
D	-
E	-
G	40-50
K	40-60
L	50-70
M	65-95
O	75-105
P	80-110
Q	85-115
R	90-120
T	125-150
U	135-160
X	155-180

PRODUCT NEWS

MINI-CON DUMMY CONNECTORS



INTRODUCTION

As part of our continuous improvement process, the **SEACON** Group consistently reviews its product ranges through both customer feedback and internal improvements. It is via these processes that **SEACON** identified a design enhancement to the **MINI-CON** dry-mate connector range.

DESIGN FEATURES

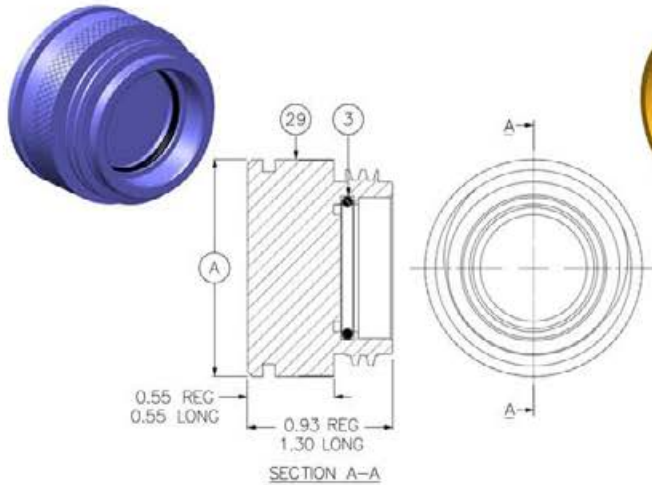
The design change is associated with the dummy connectors. With more and more customers requiring a lanyard attached to the dummy connectors to prevent loss, the DSP/DSR/PSP & PSR have been lengthened slightly and a groove added so that a lanyard can be wrapped around the groove and secured with a crimp fitting. Customers will be provided with a simple crimp fitting for use when attaching the other end of the wire to the cable or whatever equipment the customer chooses to use.

The up-graded design will become standard and available once existing stock of previous parts has been depleted. Dummies do not automatically come with lanyards, please specify at order placement.

For more details please contact +1 (619) 562-7071 or seacon@seaconworldwide.com


MINI-CON SERIES MIN-DSR (DSRL - LONG)

MINI-CON Dummy Sealing Receptacle
Mates with MIN-CCP (CCPL)



MINI-CON SERIES MIN-DSP (DSPL - LONG)

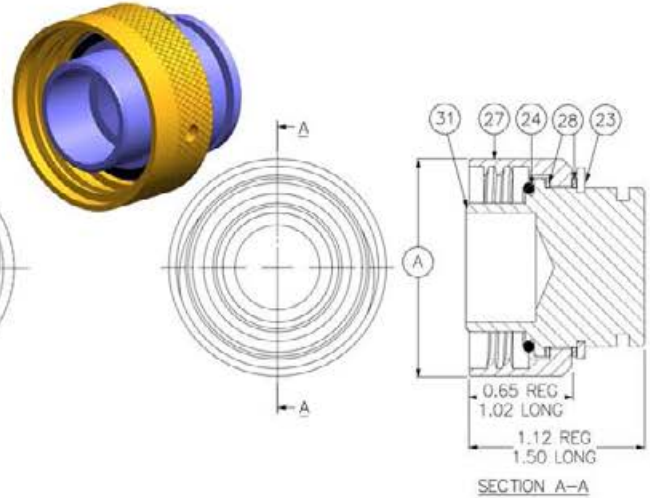MINI-CON Dummy Sealing Plug
Mates with MIN-BCR/FCR/CCR (BCRL/FCRL/CCRL)




DSP/L ENGAGING NUT TORQUE INFORMATION

DUMMY / SPLASHPROOF CONNECTOR SIZE	A - Ø (INCHES)	B - Ø (INCHES)	3 - O-RING	23 - RETAINING RING*	24 - O-RING
MIND	0.75	0.81	2-011	5100-46	2-012
MINE	0.87	0.93	2-013	5100-59	2-014
MING	1.00	1.06	2-014	5100-68	2-015
MINK	1.12	1.20	2-016	5100-78	2-017
MINL	1.25	1.31	2-018	5100-87	2-019
MINM	1.37	1.44	2-019	5100-100	2-020
MINO	1.62	1.68	2-023	5100-118	2-024
MINP	1.75	1.81	2-025	5100-131	2-027
MINQ	1.87	1.94	2-028	5100-150	2-028
MINR	2.00	2.12	2-029	5100-156	2-029
MINT	2.50	2.62	2-031	5100-187	2-032
MINU	2.75	2.87	2-033	5100-206	2-033
MINX	3.50	3.62	2-037	5100-268	2-038

SIZE	DSP/L ENGAGING NUT TORQUE ** (INCH-POUNDS)
D	-
E	-
G	40-50
K	40-60
L	50-70
M	65-95
O	75-105
P	80-110
Q	85-115
R	90-120
T	125-150
U	135-160
X	155-180


MINI-CON SERIES MIN-PSR (PSRL - LONG)

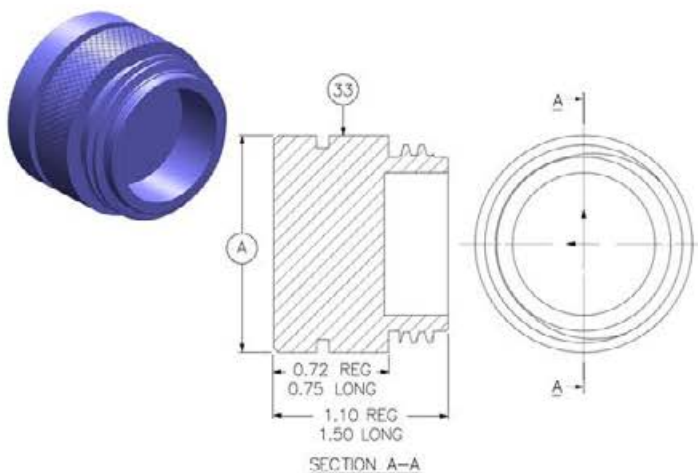MINI-CON Plastic Splashproof Receptacle
Mates with MIN-CCP (CCPL)



MINI-CON SERIES MIN-PSP (PSPL - LONG)

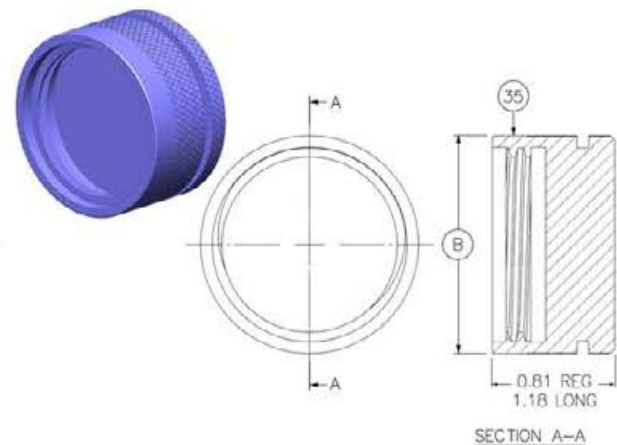MINI-CON Plastic Splashproof Plug
Mates with MIN-BCR/FCR/CCR (BCRL/FCRL/CCRL)




NOTES:

- When ordering MIN-DSR (DSRL) you receive: 3, 29. When ordering MIN-DSP (DSPL) you receive: 23, 24, 27, 28, 31. Please refer to the MINI-CON master parts and materials list on page 15.
- Please contact SEACON for appropriate dummy connectors for use on compensated systems or PBOF connectors.
- Splashproof connectors are not designed for submergence.
- * High Grade Stainless Steel.
- ** During engaging it may be necessary to use 50% of the engaging nut torque value.

MINI-CON SERIES MIN-CCP-PBOF-HP

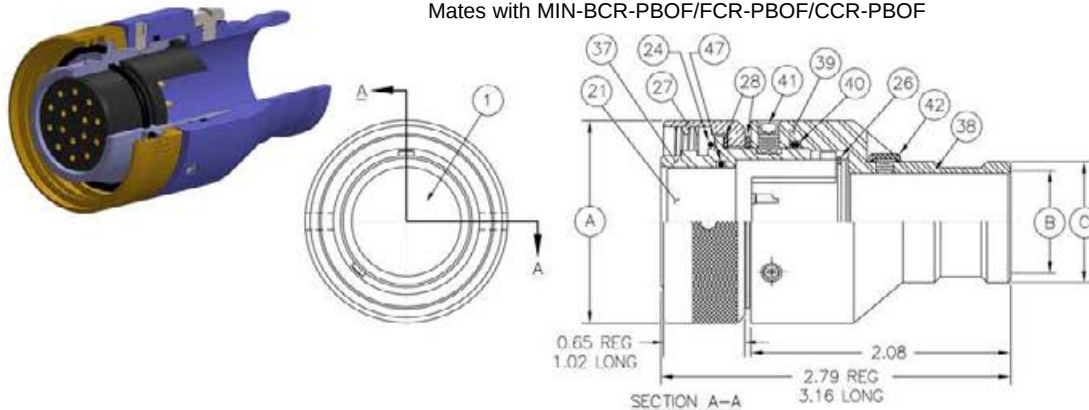MINI-CON Cable Connector Plug Pressure Balanced Oil Filled High Pressure
Mates with MIN-BCR-PBOF/FCR-PBOF/CCR-PBOF




CCP/L ENGAGING NUT TORQUE INFORMATION

SIZE	CCP/L ENGAGING NUT TORQUE * (INCH-POUNDS)
D	-
E	-
G	40-50
K	40-60
L	50-70
M	65-95
O	75-105
P	80-110
Q	85-115
R	90-120
T	125-150
U	135-160
X	155-180

MINI-CON SERIES MIN-CCP-PBOF-HP-R/A

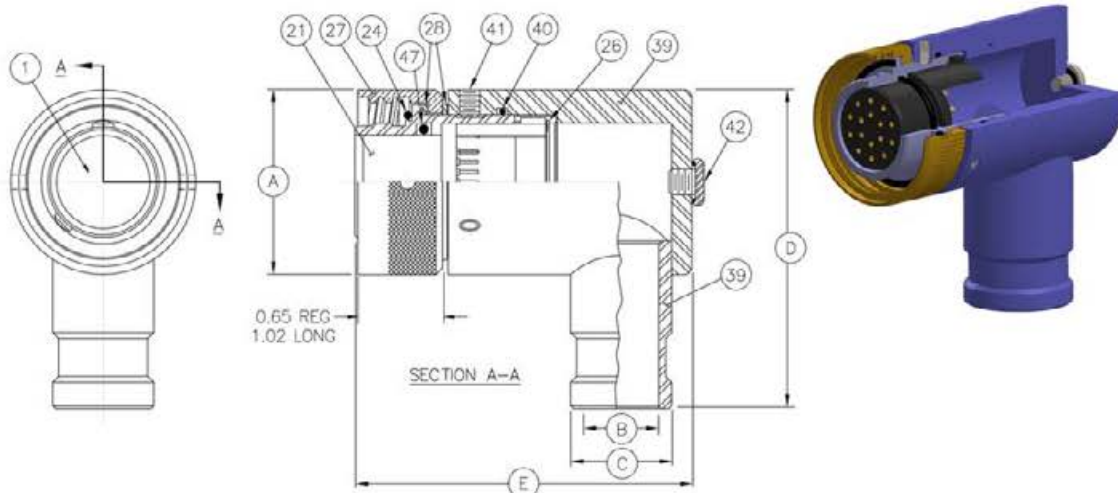MINI-CON Cable Connector Plug Pressure Balanced Oil Filled High Pressure Right Angle
Mates with MIN-BCR-PBOF/FCR-PBOF/CCR-PBOF



CONNECTOR	A - (INCHES)	B - (INCHES)	C - (INCHES)	D - (INCHES)	E - (INCHES) STD / LONG	24 - O-RING	47 - O-RING	26 - SPIROLOX	40 - O-RING	RECOMMENDED TUBE I.D. SIZE
MING-CCP / CCP-RA	1.00	0.50	0.62	2.20	2.37 / 2.75	2-015	2-012	UR56	2-017	0.50
MINK-CCP / CCP-RA	1.12	0.50	0.62	2.20	2.37 / 2.75	2-017	2-014	UR68	2-116	0.50
MINL-CCP / CCP-RA	1.25	0.56	0.75	2.37	2.50 / 2.87	2-019	2-016	UR75	2-020	0.63
MINM-CCP / CCP-RA	1.37	0.56	0.75	2.37	2.50 / 2.87	2-020	2-017	UR87	2-022	0.63
MINO-CCP / CCP-RA	1.62	0.94	1.12	3.00	3.03 / 3.40	2-024	2-020	UR100	2-025	1.00
MINP-CCP / CCP-RA	1.75	0.94	1.12	3.00	3.03 / 3.40	2-027	2-022	UR112	2-027	1.00
MINQ-CCP / CCP-RA	1.87	1.06	1.25	3.20	3.15 / 3.52	2-028	2-025	UR131	2-029	1.13
MINR-CCP / CCP-RA	2.00	1.06	1.25	3.20	3.15 / 3.52	2-029	2-026	UR137	5-009	1.13

MINI-CON PBOF

The time proven MINI-CON PBOF connector system has been upgraded. The new line which is called the MINI-CON-PBOF-HP (High Pressure) has actually been in service with some of our customers for the last eighteen years. At this time, it is replacing the traditional MINI-CON PBOF across the board. The HP version will intermate with all previous MINI-CON PBOF connectors but some components are different from before. For this reason, if you need replacement connector components, please contact SEACON for those needs. For new applications, the HP connectors will be delivered.

As with previous MINI-CON PBOF connectors, the HP design utilizes a high contact density layout. The HP style transfers the load without a valve by bearing on the insert. This is similar to a valve type system in that the force from the high pressure fluid in the hose is transferred to the bulkhead connector. We realize that our customers have many different applications for this type of system. Please contact us with your requirements and we can quote the appropriate bulkhead connector for your application.

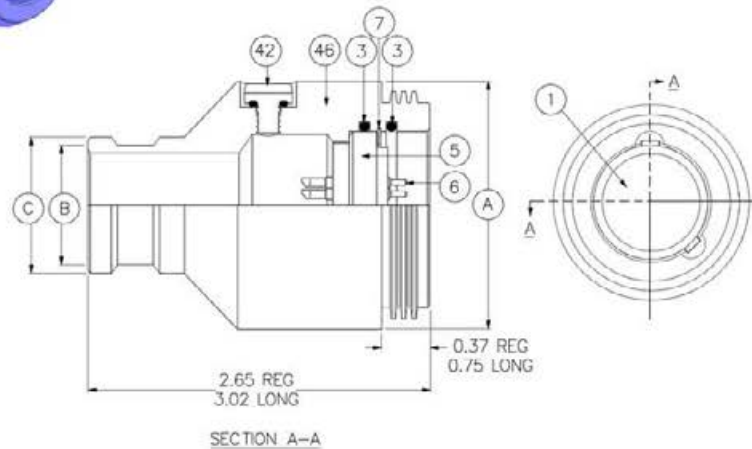

Please contact SEACON for appropriate dummy connectors for use with MINI-CON PBOF connectors.

NOTES:

- For contact configurations please refer to pages 16-20.
- When ordering MIN-CCP-PBOF you receive: 21, 22, 24, 25, 26, 27, 28, 37, 38, 39, 40, 41, 42, 47. When ordering MIN-CCP-PBOF-R/A you receive: 21, 22, 24, 25, 26, 27, 28, 38, 39, 40, 41, 42. Please refer to the MINI-CON master parts and materials list on page 15.
- Tubing, wiring and oil filling is optional.
- * During engaging it may be necessary to use 50% of the engaging nut torque value.

MINI-CON SERIES MIN-CCR-PBOF-HP

MINI-CON Cable Connector Receptacle Pressure Balanced Oil Filled High Pressure
Mates with MIN-CCP-PBOF/CCP-PBOF-R/A



PART	A - (INCHES)	B - (INCHES)	C - (INCHES)	7 - SPIROLOX	3 - O-RING	RECOMMENDED TUBE I.D. SIZE
MING-CCR-PBOF	1.00	0.50	0.62	UR50	2-014	0.50
MINK-CCR-PBOF	1.12	0.50	0.62	UR62	2-016	0.50
MINL-CCR-PBOF	1.25	0.56	0.75	UR75	2-018	0.62
MINM-CCR-PBOF	1.37	0.56	0.75	UR81	2-019	0.62
MINO-CCR-PBOF	1.62	0.94	1.12	UR106	2-023	1.00
MINP-CCR-PBOF	1.75	0.94	1.12	UR118	2-025	1.00
MINQ-CCR-PBOF	1.87	1.06	1.25	UR137	2-028	1.12
MINR-CCR-PBOF	2.00	1.06	1.25	UR150	2-029	1.12

MINI-CON PBOF

The time proven **MINI-CON** PBOF connector system has been upgraded. The new line which is called the **MINI-CON-PBOF-HP** (High Pressure) has actually been in service with some of our customers for the last eighteen years. At this time, it is replacing the traditional **MINI-CON** PBOF across the board. The HP version will intermate with all previous **MINI-CON** PBOF connectors but some components are different from before. For this reason, if you need replacement connector components, please contact **SEACON** for those needs. For new applications, the HP connectors will be delivered.

As with previous **MINI-CON** PBOF connectors, the HP design utilizes a high contact density layout. The HP style transfers the load without a valve by bearing on the insert. This is similar to a valve type system in that the force from the high pressure fluid in the hose is transferred to the bulkhead connector. We realize that our customers have many different applications for this type of system. Please contact us with your requirements and we can quote the appropriate bulkhead connector for your application.

Please contact **SEACON** for appropriate dummy connectors for use with **MINI-CON** PBOF connectors.

NOTES:

- For contact configurations please refer to pages 16-20.
- When ordering MIN-CCR-PBOF you receive: 3, 5, 6, 7, 42, 46. Please refer to the **MINI-CON** master parts and materials list on page 15.
- Tubing, wiring and oil filling is optional.

MASTER PARTS AND MATERIALS LIST




























ITEM	QTY	PART/DESCRIPTION	NOTES
1	-	INSERT FACE PATTERN	* 11
2	1	O-RING	* 6 * 13
3	AR	O-RING	* 6
4	1	MIN-BCR	* 1 * 13
5	1	MIN-CIR/ MIN-CIR-PBOF-HP	* 2
6	AR	CONTACT PINS	* 3 * 11
7	1	SPIROLOX	* 5
8	1	BULKHEAD HEX NUT (OPTIONAL)	* 5
9	1	BULKHEAD WASHER (OPTIONAL)	* 5
10	AR	EPOXY (OPTIONAL)	* 7
11	AR	HOOK-UP WIRE (OPTIONAL PIGTAILS)	* 8
12	1	MIN-FCR	* 1 * 13
13	1	O-RING	* 6
14	4	SOCKET CAP HEX SCREW (OPTIONAL)	* 5
15	1	MIN-CCR	* 1
16	AR	FILL COMPOUND REQUIRED	* 14
17	1	MIN-CCP/CCR FI BOOT (OPTIONAL)	* 4 * 12
18	AR	OVERMOLD (OPTIONAL)	* 4 * 12
19	2	NYLON CABLE TIE (OPTIONAL)	* 12
20	1	MIN-CCP	* 1 * 13
21	1	MIN-CIP / MIN-CIP-PBOF-HP	* 2
22	AR	CONTACT SOCKETS	* 3 * 11
23	1	RETAINING RING	* 5
24	1	O-RING	* 6 * 13
25	1	O-RING	* 6
26	1	SPIROLOX	* 5
27	1	ENGAGING NUT	* 10
28	2	ENGAGING NUT WASHER	* 9
29	1	MIN-DSR/MIN-DSRL	* 1
31	1	MIN-DSP/MIN-DSPL	* 1
33	1	MIN-PSR/MIN-PSRL	* 9
35	1	MIN-PSP/MIN-PSPL	* 9
37	1	MIN-CCP-PBOF-HP-FWD END	* 1
38	1	MIN-CCP-PBOF-AFT END	* 1
39	1	MIN-CCP-PBOF-R/A AFT END	* 1
40	1	O-RING	* 6
41	3	8-32 UNC-2A HEX SOCKET SET SCREW/CUP POINT	* 5
42	1	10-24 UNC-2A PAN HEAD SCREW WITH 5-105 O-RING	* 5 * 6
43	1	MIN-BCR DUAL O-RING	* 1 * 13
44	1	O-RING	* 6
45	1	O-RING	* 6 * 13
46	1	MIN-CCR-PBOF	* 1
47	1	O-RING	* 6 * 13

MAXIMUM CABLE O.D

TYPE OF CONNECTOR	MAXIMUM CABLE O.D.
MIND-CCP	3/8 (0.375)
MIND-CCR	1/2 (0.500)
MINE-CCP	3/8 (0.375)
MINE-CCR	1/2 (0.500)
MING-CCP	9/16 (0.562)
MING-CCP-R/A	5/8 (0.625)
MING-CCR	9/16 (0.562) CCP MOLD
MINK-CCP	7/8 (0.875)
MINK-CCP-R/A	5/8 (0.625)
MINK-CCR	7/8 (0.875) CCP MOLD
MINK-FCR-HP SIDE	3/8 (0.375)
MINK-FCR-HP SIDE R/A	1/2 (0.500)
MINL-CCP	1 (1.000)
MINL-CCP-R/A	5/8 (0.625)
MINL-CCR	1 (1.000) CCP MOLD
MINM-CCP	3/4 (0.750)
MINM-CCP-R/A	3/4 (0.750)
MINM-CCR	3/4 (0.750) CCP MOLD
MINO-CCP	1 1/4 (1.250)
MINO-CCP-R/A	3/4 (0.750)
MINO-CCR	1 1/4 (1.250) CCP MOLD
MINP-CCP	1 (1.000)
MINP-CCP-R/A	27/32 (0.843)
MINP-CCR	1 (1.000)
MINP-PNT-HP SIDE	-
MINQ-CCP	1 1/4 (1.250)
MINQ-CCP-R/A	7/8 (0.875)
MINQ-CCR	1 1/4 (1.250) CCP MOLD
MINR-CCP	1 1/4 (1.250)
MINR-CCP-R/A	1 (1.000)
MINR-CCR	1 1/4 (1.250) CCP MOLD
MINS-CCP	1 3/8 (1.375)
MINS-CCP-R/A	1 1/8 (1.125)
MINS-CCR	1 3/8 (1.375) CCP MOLD
MINT-CCP	1 1/2 (1.500)
MINT-CCP-R/A	1 1/4 (1.250)
MINT-CCR	1 1/2 (1.500) CCP MOLD
MINU-CCP	1 11/16 (1.687)
MINU-CCP-R/A	1 3/8 (1.375)
MINU-CCR	1 11/16 (1.687) CCP MOLD




































NOTES:

- * 1 Material: 316 Stainless Steel per ASTM A 484.
- * 2 Material: Glass Reinforced Epoxy, SEACON XS-2748.
- * 3 Material: Copper Alloy & Gold Plated per ASTM B 488.
- * 4 Material: Neoprene Molding per SEACON X-5727.
- * 5 Material: High Grade Stainless Steel.
- * 6 Material: Nitrile (formerly known as Buna N).
- * 7 Material: Epon 828/Ciba 840.
- * 8 Material: TFE insulated wire.
- * 9 Material: Acetal per ASTM D 4181, Black.
- * 10 Material: Copper Alloy 630 per ASTM B 150.
- * 11 Reference face configurations for size of contacts and locations.
- * 12 An overmold or field installable boot is optional on both the CCP and the CCR.
- * 13 Dovetail groove to prevent loss of o-ring.
- * 14 Not supplied.

SIZE	MINI-CON SERIES CONTACT CONFIGURATIONS (MALE FACE VIEW ONLY - NOT TO SCALE)									
D	 4#22	 8#28	E	 7#22	 19#28					
G	 3#16 (LONG)	 3#22	 4#22	 5#22	 6#22	 7#20	 10#22			
K	 4#16 (LONG)	 5#16 (LONG)	 6#20	 1#10/6#20 (7 LONG)	 2#14/6#22 (8 LONG)	 10#20	 2#14/8#20 (10 LONG)	 12#22	 6#20/10#22 (16)	 19#22
L	 2#22/20 ohm COAX (LONG)	 2#20 HV	 1#22/20 ohm COAX 4#20 (5 LONG)	 3#10/3#22 (6 LONG)	 7#16 (LONG)	 3#14/6#22 (9 LONG)	 12#22			
	 2#16/6#20/8#22 (16 LONG)	 18#22	 18#20	 8#20/10#22 (18)	 6#20/14#22 (20)	 24#22				
M	 3#14 (LONG)	 4#10 (LONG)	 4#14 (LONG)	 7#16 (LONG)	 10#16 (LONG)	 4#16/8#20 (12 LONG)	 3#16/12#22 (15 LONG)			
	 16#22	 6#16/12#20 (18 LONG)	 3#16/19#22 (22 LONG)	 3#16/21#22 (24 LONG)	 25#20	 26#20	 37#22			
O	 2#14 HV	 4#14 (LONG)	 8#14 (LONG)	 12#20	 3#10/4#14/6#22 (13 LONG)	 3#10/1#14/9#22 (13 LONG)	 3#14/11#20 (14 LONG)	 14#16		
	 16#22	 4#10/12#22 (16B LONG)	 19#22 HV	 8#14/13#20 (21 LONG)	 44#20	 6#16/9#20/34#22 (49 LONG)	 52#22	 56#22		

NOTES:

- ▼ Available as Glass Sealed style connectors.
- All configurations shown are the face view of the receptacle connector (BCR/FCR/CCR).
- 600 VDC is standard; many of the above can handle higher voltage ratings.
- Please contact SEACON for specific voltage ratings.

SIZE	MINI-CON SERIES CONTACT CONFIGURATIONS (MALE FACE VIEW ONLY - NOT TO SCALE)					
P						
	4#14/2#20 (6 LONG)	1#16/5#22 (6 LONG)	7#10 (LONG)	25#16 (LONG)	1#22/20 ohm COAX 2#14/3#20/19#22 (25 LONG)	4#22/20 ohm COAX 29#22 (33 LONG)
						
Q						
	3#14/2#16/13#22 (18 LONG)	24#20	26#16 (LONG)	56#20	90#22	10#20/82#22 (92)
						106#22
R						
	3#22/20 ohm COAX 8#16 (11 LONG)	12#10 (LONG)	4 20 ohm COAX 9#16 (13A LONG)	15#10 (LONG)	16#14 HV (LONG)	20#16 (LONG)
						4#10/18#16 (22 LONG)
R						
	2#22/20 ohm COAX 2#10/24#16 (28 LONG)	30#16 (LONG)	8#10/24#22 (32A LONG)	32#16 (LONG)	37#16 (LONG)	44#16 (LONG)
						45#20
R						
	24#20/23#22 (47)	56#20	4#10/6#16/74#22 (84 LONG)	96#20	131#22	
						























NOTES:

- ▼ Available as Glass Sealed style connectors.
- All configurations shown are the face view of the receptacle connector (BCR/FCR/CCR).
- 600 VDC is standard; many of the above can handle higher voltage ratings.
- Please contact SEACON for specific voltage ratings.

SIZE	MINI-CON SERIES CONTACT CONFIGURATIONS (MALE FACE VIEW ONLY - NOT TO SCALE)				
T					
	RG8 COAX (LONG)	3#22	8#20/15#22 (23)	30#16 (LONG)	56#16 (LONG)
	206#22				
U					
	10#14/12#16/33#20 (55 LONG)	60#16 HV (LONG)	76#22	87#20	
	38#16/81#22 (119 LONG)	6#16/170#22 (176)	4#10/6#16/193#22 (203 LONG)		
X					
	94#16 (LONG)	94#20			















NOTES:

- All configurations shown are the face view of the receptacle connector (BCR/FCR/CCR).
- 600 VDC is standard; many of the above can handle higher voltage ratings.
- Please contact SEA CON for specific voltage ratings.

SIZE	REVERSED MINI-CON SERIES (V-MIN) CONTACT CONFIGURATIONS (MALE FACE VIEW ONLY - NOT TO SCALE)										
G				K							
	3#16 (LONG)	7#20	10#22		10#20	12#22	6#20/10#22 (16)	19#22			
L											
	7#16 (LONG)	18#22	24#22								
M											
	3#14 (LONG)	4#10 (LONG)	4#12 (LONG)	7#16 (LONG)	10#16 (LONG)	3#16/21#22 (24 LONG)	26#20	37#22			
O											
	4#14 (LONG)	8#14 (LONG)	12#20	3#10/4#14/6#22 (13A LONG)	3#10/1#14/9#22 (13 LONG)	3#14/11#20 (14 LONG)					
											
	16#22	4#10/12#22 (16B LONG)	8#14/13#20 (21 LONG)	44#20	6#16/9#20/34#22 (49 LONG)	52#22					
P					Q						
	7#10 (LONG)	25#16 (LONG)	4#22/20 ohm COAX /29#22 (33 LONG)	76#22		106#22					
R											
	15#10 (LONG)	20#16 (LONG)	2#22/20 ohm COAX 2#10/24#16 (28 LONG)	30#16 (LONG)	32#16 (LONG)	8#10/24#22 (32A LONG)					
											
	37#16 (LONG)	44#16 (LONG)	56#20	4#10/6#16/74#22 (84 LONG)	131#22 (LONG)						

NOTES:

- All configurations shown are the face view of the receptacle connector (BCR/FCR/CCR).
- 600 VDC is standard; many of the above can handle higher voltage ratings.
- Please contact SEACON for specific voltage ratings.

SIZE	MINI-CON SERIES FIBER OPTIC CONTACT CONFIGURATIONS (MALE FACE VIEW ONLY - NOT TO SCALE)									
F	 1FO	M	 2FO	 3FO	O	 2FO/2#16	 2FO/12#20	 4FO		
P	 2FO/6#16	 4FO	Q	 3FO/3#16	 3FO/4#16	 1FO/16#16				
R	 3FO/3#10	 4FO/2#10/4#16	 6FO	 6FO	 6FO/2#16					
	 7FO/6#16-PBOF	 8FO	 8FO/6#16	 8FO-PBOF						
T	 4FO/9#16/2#14	 4FO/5#16	U	 4FO/2#10/12#16	 6FO/20#20					
X	 4FO/4#10/28#20									

NOTES:

- Fiber Optic connectors available in the long shell size only.
- Please see the Dry-Mate Hybrid section of the catalog or contact SEACON for further information.

S E A C O N



Micro MINI-CON

UNDERWATER ELECTRICAL DRY-MATE CONNECTORS

SECTION	PAGE
Micro MINI-CON SERIES	
Introduction	MIN 23
Availability	MIN 23
Applications	MIN 23
Testing	MIN 23
Part Number System	MIN 23
General Information	MIN 23
Dimension Details:	
MM-BCR	MIN 24
MM-CCP	MIN 24
Interface Details	MIN 25
Contact Configurations	MIN 26

INTRODUCTION

To meet the ever increasing demand for smaller high density connectors, **SEACON** developed the **Micro MINI-CON** series. This miniature connector series incorporates all of the engineering concepts and design features of our highly successful **MINI-CON** range, but in a smaller configuration beginning at 1/2" in diameter.

In order to maintain the miniaturization and provide minimal wall thickness, special o-rings were developed to seal the interfaces on all plugs and receptacles. The inserts are retained in the connector shells using custom designed and manufactured retaining rings made of 17/4 PH Stainless Steel.

In many applications a flange mounted receptacle is preferred instead of a screw-in type. To fill this need, **SEACON** has developed a modular flange that adapts a standard BCR connector for use as an FCR. An added benefit of this design is the ability to clock the FCR in several orientations with respect to the bolt pattern. This can be however **SEACON** has designed a modular flange that fits over the screw-in type eliminating the need to purchase a separate shell, again without compromising performance.

AVAILABILITY

The **Micro MINI-CON** dry-mateable connector range is available in 6 different shell sizes ranging from 4 to 202 contacts with a pressure rating of 13,500 psi mated and is also available in a fiber optic configuration (please see our Optical Dry-Mate Hybrid section). In addition, this series also offers the option of right angles, over-molding of the cable plug, field installing the cable using boots or terminating with a Pressure Balanced Oil-Filled (PBOF) system.

APPLICATIONS

The **Micro MINI-CON** is suitable for a variety of applications including cameras and lights or any application where size is an issue.

TESTING

The **Micro MINI-CON** range of connectors have been subjected to the following testing:

Environmental

Humidity (Steady State)

- Tested in accordance with MIL-STD-202, Method 103.

Thermal Shock

- Tested in accordance with MIL-STD-202, Method 107.

Mechanical Shock

- Tested in accordance with MIL-S-901, Grade A, Class 1.

Hydrostatic Pressure

- Tested in accordance with MIL-STD-202, Method 1006.

Physical

Vibration

- Tested in accordance with MIL-STD-202, Method 301.

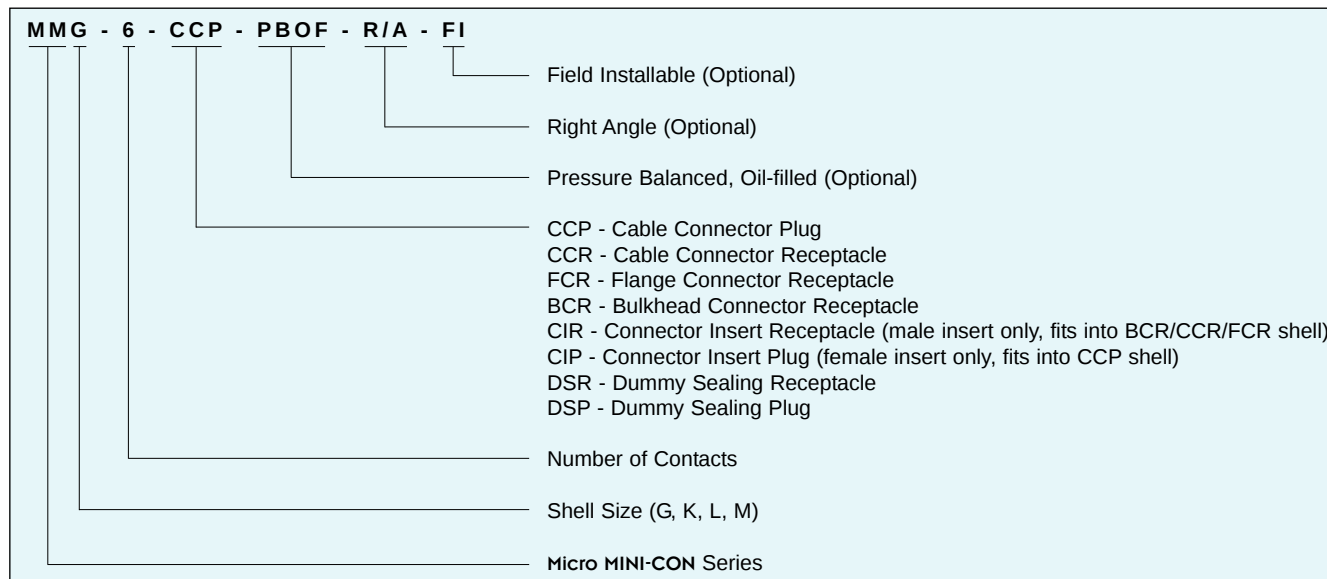
Electrical

Dielectric Withstanding Voltage

- Tested in accordance with MIL-STD-202, Method 301.

Insulation Resistance

- Tested in accordance with MIL-STD-202, Method 302.

PART NUMBER SYSTEM - EXAMPLE**GENERAL INFORMATION**

COMPONENT	MATERIAL
BULKHEAD BODY (BCR/FCR)	Ti6A14V
CCP BODY	Ti6A14V c/w Ti Grade 2 Engaging Nut
CONTACT INSERT	Glass Filled Epoxy MIL-G-24325
ELECTRICAL CONTACTS	Copper Alloy Gold Plated per MIL-G-45204
O-RINGS	Nitrile (formerly known as Buna N)


CATEGORY	VALUE
OPEN FACE PRESSURE	3,000 psi (inserted prepared)
MATED PRESSURE	Up to 13,500 psi mated and potted
VOLTAGE RATING	300 VDC although higher voltage ratings are available. Please contact SEACON for further information
CURRENT RATING	Up to 4 amps dependent on contact size and cable

OPTIONS:

- Pressure Balanced Oil Filled (PBOF).
- Higher voltages.
- Available in alternative materials.
- Glass sealed CIR design available.



Micro MINI-CON SERIES MM-BCR/FCR

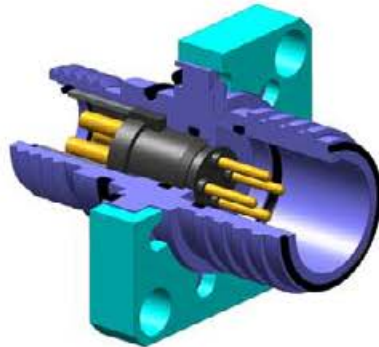Micro MINI-CON Bulkhead Connector Receptacle/Flange Connector Receptacle
Mates with MMG-CCP
Dummy Connector: MMG-DSP



Micro MINI-CON SERIES MM-CCP

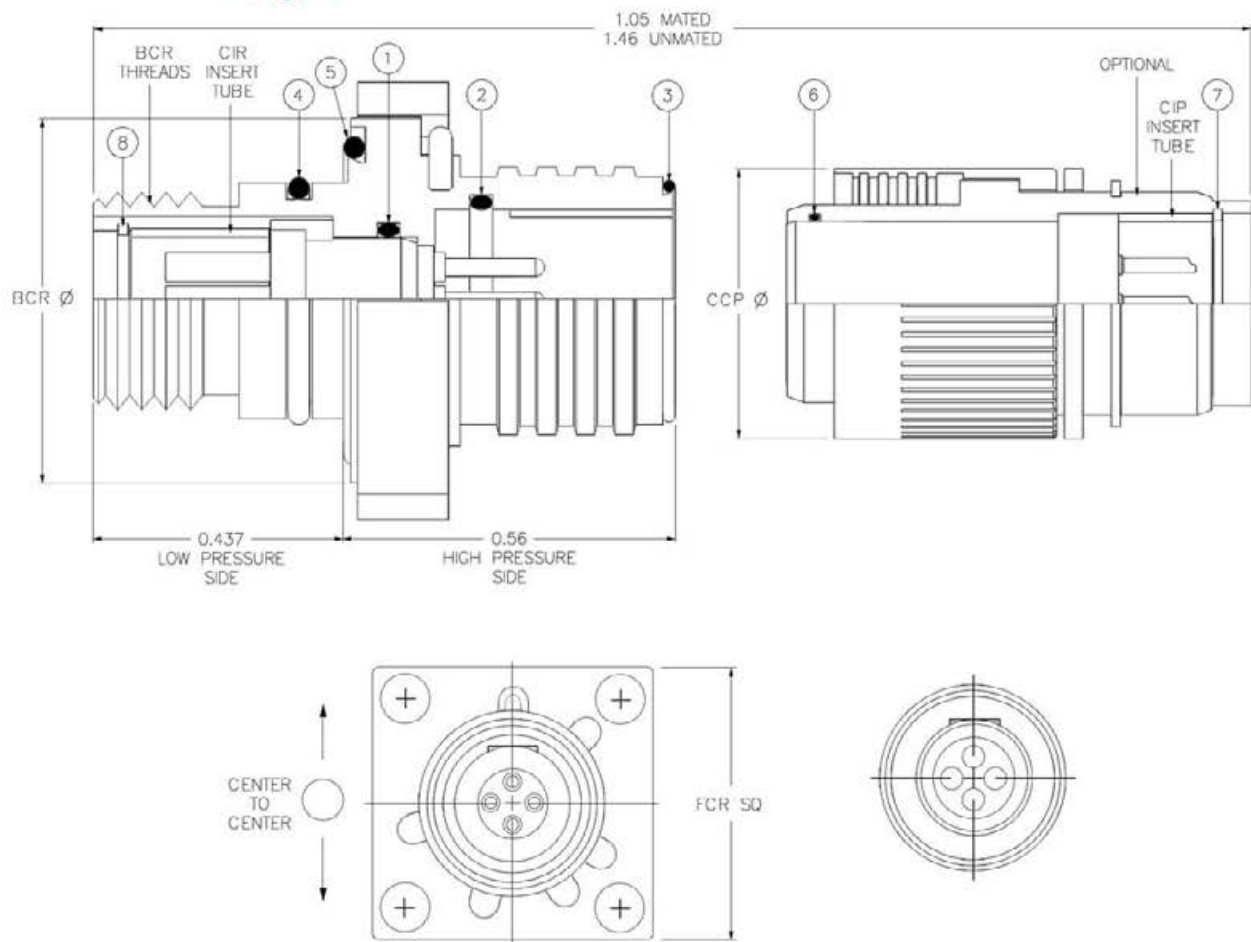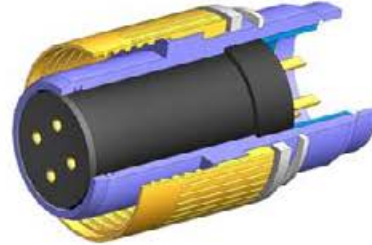Micro MINI-CON Cable Connector Plug
Mates with MMG-BCR/FCR/CCR
Dummy Connector: MMG-DSR





SIZE	OD BCR (INCHES)	OD ENGAGING NUT (INCHES)	FCR SQUARE (INCHES)	BCR THREADS	1 - O-RING	2 - O-RING	3 - O-RING	4 - O-RING	5 - O-RING	6 - O-RING	7 - RET RING CCP	8 - RET RING B/F/CCR
G*	0.625	0.500	0.750	0.375-24 UNF	SS-201	SS-301	SS-303	SS-302	SS-404	SS-201	MMRR-25	MMRR-25
K*	0.750	0.625	0.875	0.500-20 UNF	SS-301	SS-401	SS-403	SS-402	SS-601	SS-301	MMRR-35	MMRR-35
L*	0.875	0.750	1.000	0.593-18 UNF	SS-401	SS-501	SS-503	SS-502	SS-702	SS-401	MMRR-45	MMRR-45
M	1.000	0.875	1.125	0.687-20 UN	SS-602	SS-602	SS-603	SS-602	SS-801	SS-501	MMRR-61	MMRR-64


NOTES:

* Reverse load; insert loaded from the low pressure side as shown in drawing above. All other insert sizes are loaded from the high pressure side.

Micro MINI-CON SERIES
MM-BCR
THROUGH BORE OPTION
 Micro MINI-CON Bulkhead Connector Receptacle



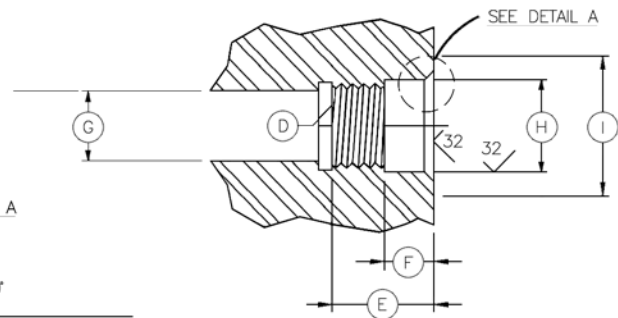
Micro MINI-CON SERIES
MM-BCR
THREADED MOUNTING OPTION
 Micro MINI-CON Bulkhead Connector Receptacle



BCR INTERFACE MOUNTING INFORMATION





CONNECTOR	A - LENGTH (INCHES)	B - Ø (INCHES)	C - Ø (INCHES)	D - THREAD	E - LENGTH (INCHES)	F - Ø (INCHES)	G - Ø (INCHES)	H - Ø (INCHES)	I - Ø (INCHES)
MMG-BCR	0.250 0.156	0.408 0.407	0.62	0.375-24 UNF-2B	0.45	0.22	0.31	0.408 0.407	0.62
MMK-BCR	0.250 0.156	0.537 0.536	0.75	1/2-20 UNF-2A	0.45	0.22	0.37	0.537 0.536	0.75
MML-BCR	0.250 0.156	0.632 0.631	0.87	19/32-18 UNF-2B	0.45	0.22	0.45	0.632 0.631	0.87
MMM-BCR	0.310 0.200	0.711 0.710	1.00	0.687-20 UN-2B	0.510	0.29	N/A	0.711 0.710	1.00

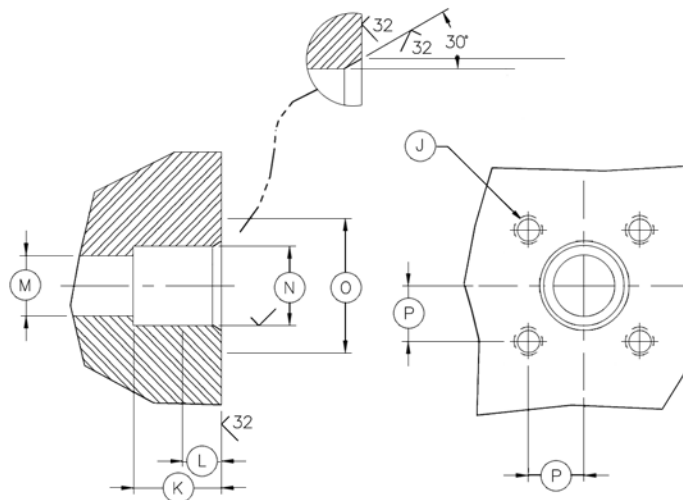Micro MINI-CON SERIES
MM-FCR
MOUNTING DETAILS
 Micro MINI-CON Flange Connector Receptacle



FCR INTERFACE MOUNTING INFORMATION

CONNECTOR	J - THREAD	K - LENGTH (INCHES)	L - Ø (INCHES)	M - Ø (INCHES)	N - Ø (INCHES)	O - Ø (INCHES)	P - Ø (INCHES)
MMG-FCR	4 X 4-40 UNC-2B	0.45	0.20	0.31	0.408 0.407	0.62	0.286
MMK-FCR	4 X 4-40 UNC-2B	0.45	0.20	0.37	0.537 0.536	0.750	0.343
MML-FCR	4 X 4-40 UNC-2B	0.50	0.13	0.50	0.632 0.631	0.88	0.400
MMM-FCR	4 X 6-32 UNC-2B	0.52	0.20	0.50	0.711 0.710	1.00	0.438

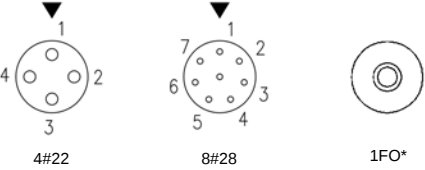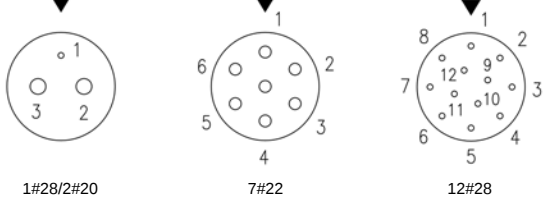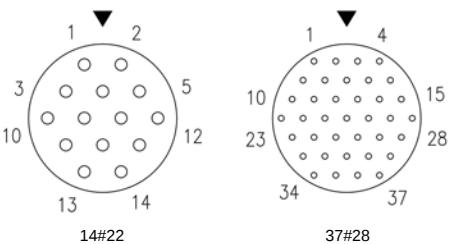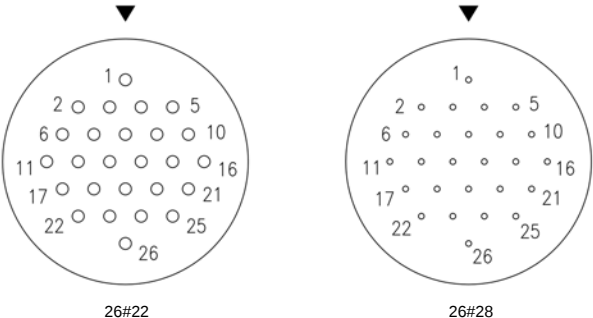SIZE	Micro MINI-CON SERIES CONTACT CONFIGURATIONS (MALE FACE VIEW ONLY - NOT TO SCALE)
G	
K	
L	
M	

NOTES:

- All configurations shown are the face view of the Bulkhead Connector (BC).
- Standard bulkhead contacts are male.
- Numbers are for reference only.
- For custom configurations or special applications please contact **SEACON**.

- * Micro MINI-CON fiber optic configuration.

HANDLING PROCEDURES AND SPECIAL CAPABILITIES

SEACON

1700 Gillespie Way,
El Cajon, California 92020, USA.
TEL: +1 (619) 562-7071
FAX: +1 (619) 562-9706
E-Mail: seacon@seaconworldwide.com
Website: www.seaconworldwide.com

SEACON US GULF AREA SALES OFFICE

14511 Old Katy Road, Suite 300,
Houston, Texas 77079, USA.
TEL: +1 (281) 599-3509
FAX: +1 (281) 599-3517
E-Mail: gulfcoastsales@seaconworldwide.com
Website: www.seaconworldwide.com

SEACON US EAST COAST SALES OFFICE

TEL: +1 (401) 637-4952
FAX: +1 (401) 637-4953
E-Mail: eastcoastsales@seaconworldwide.com
Website: www.seaconworldwide.com

SEACON ADVANCED PRODUCTS, LLC

1321 Nelius Road, P.O. Box 767,
Bellville, Texas 77418, USA.
TEL: +1 (979) 865-8846
FAX: +1 (979) 865-8859
E-Mail: bellvillesales@te.com
Website: www.seacon-ap.com

SEACON BRAZIL

Rua Conde de Bonfim 120 sala 212, Tijuca,
Rio de Janeiro, Brazil, CEP: 20520-053.
TEL: +55 011 2103-6263
CELL: +55 021 97499-1270
E-mail: simone.carvalho@te.com
Website: www.seaconworldwide.com

SEACON (europe) LTD

Seacon House, Hewett Road, Gapton Hall Industrial Estate,
Great Yarmouth, Norfolk, NR31 0RB, UK.
TEL: +44 (0) 1493-652733
FAX: +44 (0) 1493-652840
E-Mail: gyarmouthsales@te.com
Website: www.seaconeurope.com

SEACON GLOBAL PRODUCTION

Blvd. Paseo del Cucapah no. 16822-B
Colonia el Lago C.P. 22210
Tijuana, BC Mexico
TEL: +52 (664) 626-2726
FAX: +52 (664) 686-8922
E-Mail: sales@seaconglobal.com
Website: www.seaconglobal.com
Dial from U.S.A. TEL: +1 (619) 308-7901
TOLL FREE: (888) 562-7072
FAX: +1 (619) 308-7900

SEACON PHOENIX

15 Gray Lane, Suite 108, Hopkinton Industrial Park,
Ashaway, Rhode Island 02804, USA.
TEL: +1 (401) 637-4952
FAX: +1 (401) 637-4953
E-Mail: sales@seaconphoenixllc.com
Website: www.seaconphoenix.com

Even though these procedures appear simple, only qualified technicians should perform the installation and maintenance. Connectors are designed for installation on one atmosphere vessels. Contact **SEACON** for recommendations if using compensated vessels.

INSTALLATION PROCEDURES

Torque values referenced assume installation into dry metal threads. Bulkhead connector receptacle (BCR) o-ring should be lubricated with an appropriate silicone grease before installing. This lubricant should be applied to form an adequate film. Excessive lubrication is detrimental to the operation of the connector. Care must be taken to ensure no grease or dirt is present on the face of the fiber optic contact. Cleaning of the contact is recommended using only suitable products. CCP o-ring should be greased as above with the same care being taken.

CARE AND MAINTENANCE

Once mated the connector requires no maintenance. When stored all fiber contacts should be protected with suitable dust caps. **CAUTION:** The use of some oil-based propellants in spray cans can cause conductivity problems in neoprene.

CABLE AND CONTINUITY PRESERVATION

Avoid sharp bends in cables. Cables subjected to vibration and exposed to seawater drag should be adequately clamped to prevent fatigue and possible failure.

SPECIAL ASSEMBLIES

SEACON maintains all facilities necessary to furnish complete underwater and environmental electrical connector/cable systems, including Research and Development, Engineering, Manufacturing, Quality Control and Pressure Testing. As well as supplying our standard 'off-the-shelf' items, we have the capability to design and manufacture **SPECIAL CUSTOMIZED CONNECTORS AND CABLE ASSEMBLIES** to suit your individual needs.

All reasonable efforts have been taken to ensure that the information contained herein is accurate at the date of publication, but no representation or warranty as to the accuracy or completeness of such information is intended or to be implied by its inclusion herein. Any and all representations and warranties pertaining to the information and products referred to herein shall be set forth in **SEACON** standard sales order form. In addition, **SEACON** reserves the right to make changes to the contents hereof without notice, therefore it is suggested that at the time of inquiry, the appropriate sales office or factory be contacted directly for verification of published specifications and products availability.

© 2017 **SEACON**
ALL RIGHTS RESERVED

