

500 Watt High Intensity LED Light - 60,000 Lumens - 120-277V AC - High Mast / Stadium Lighting

Part #: [GAU-LTL-500W-LED](#)



The GAU-LTL-500W-LED High Mast (Stadium) LED Flood Light offers intense light output and is ideal for flood lighting, high mast lighting, light towers, as well as industrial and outdoor lighting applications. Producing 60,000 lumens, a 4.25 amp draw at 120V, 80,000 hour service life, 120-277 volt compatibility, and IP67 waterproof rating, this LED flood light provides operators with a rugged and powerful LED alternative to 1500 watt metal halide lamps that uses little power and can withstand rugged use and abusive conditions.

The GAU-LTL-500W-LED LED light from Larson Electronics produces 60,000 lumens of high intensity light while drawing only 500 watts at 5 amps from a 120 volt electrical system. Forty-Eight CREE® high output LEDs producing 963 lumens each are arranged in rows and paired with PMMA high purity optics to produce a well focused 24° wide spot beam that is ideal for providing far reaching concentrated illumination while still covering a substantial amount of area. We also offer optional optics with 10° spot, 38° narrow flood, 60° flood, and 90° wide flood beam spreads. The spot beams are tightly focused and are designed for high elevation mounting to achieve distance, making spot versions ideal for high mast and spots lighting. The flood beams are designed to provide more light over a larger area nearer the fixture, making flood versions ideal for use as dedicated work and area lights.



[Click Photo to Enlarge](#)




[Click Photo to Enlarge](#)



[Click Photo to Enlarge](#)

GAU-LTL-500W-LED lights are ideal replacements for fragile and hot running 1500 watt metal halide lamps. They offer low power requirements, high durability and a versatile mounting system that makes these LED light emitters a superior lighting solution for demanding applications where power and reliability is critical. The heavy duty design and high power of these LED lights also makes them suitable for a wide array of applications including but not limited to: high mast lighting, light towers, light plant LED retrofits, military, mining, industrial manufacturing, machine visioning, security and law enforcement, commercial structure illumination, sport complexes, billboards, race tracks, and parking lots to name a few.

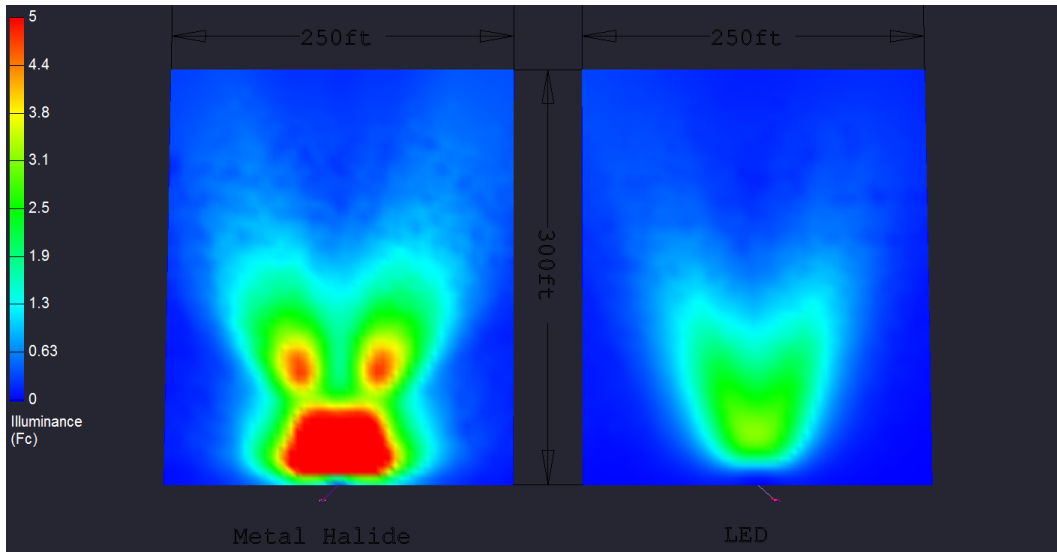

[Click Photo to Enlarge](#)

The above image shows the comparison of the traditional (4) 1500 watt metal halides light fixtures mounted to a 30' light tower (left) to (4) GAU-LTL-500W-LED 500 watt LED light fixtures mounted to a 30' light tower. The area being illuminated by each tower is 300' in length and 250' in width. Unlike the metal halide light fixtures, there are no hot spots with these LED fixtures. This high output LED light fixture provides an even beam spread over the targeted work area without overcast, glare, light spillage, and wasted illumination. Color rendering is also increased with LED light plants, providing a more realistic night vision that more closely resembles natural daylight illumination.

Heat Management: Heat is the single largest factor in premature LED failure and color shifting. These LED units feature individual heat sinks per bank of six LEDs to control heat buildup rather than utilizing a single housing to dissipate heat. This allows for more thorough cooling of the LEDs for extended operating periods. This allows the LEDs to be driven at up to 90% capacity without overheating or visible loss of light output. The end result is more light with less heat and longer LED life with an average 70% lumen maintenance after 80,000 hours.

Durability: As well as unparalleled heat control, the GAU-LTL-500W-LED series of LED lights from Larson Electronics also offer IP67 rated construction that is designed to withstand extremes of environmental and operating conditions. These units can withstand rapid temperature changes of -40° Celsius to +80° Celsius, are waterproof, and resist ingress of dust, dirt and humidity. The housings are formed from die cast aluminum and the optics are high transmission PMMA with 98% light transmittance. The CREE® LEDs help these units achieve resistance to vibrations and are rated at 70% lumen maintenance after 80,000 hours of use. We recommend these LED lights for use in applications where a lot of vibration, dust, dirt, dampness and abusive working conditions are encountered.

Mounting: Each unit is equipped with a back mount trunnion style mounting bracket that allows the light to be attached to flat surfaces and adjusted through 160° of vertical movement. To adjust the unit after mounting, the user simply loosens the set screws located on either side of the unit, moves it into the desired position, then re-tightens the screws. The base of the mounting trunnion is equipped with several machined slots which allow users to utilize existing mounting holes and slide the unit for precise mount positioning.

Specifications / Additional Information**GAU-LTL-500W-LED High Mast LED Light****Lamp Type:** CREE® LED**Dimensions:** 22.92"-L x 14.51"-W x 5.153"-D**Weight:** 56.81 Lbs**Total Watts:** 500**Total Lumens:** 60,000**Luminous Efficiency:** 120 lm/w**Beam Configurations:** 10° Spot, 24° Wide Spot, 38° Narrow Flood, 60° Flood, or 90° Wide Flood**LED Color Temperature:** Cool White - 5500-6500K**LED Life Expectancy:** 80,000 hours**Optics Efficiency:** 98% - PMMA High Transmittance Optics**Led Drive %:** 90%**Voltage:** 120-277 VAC**Amp Draw:** 5A @ 120V, 2.5A @ 240V, 2.67A @ 277V**Wiring:** 10' Pigtail w/ Flying Leads**Mounting:** Flat Surface Trunnion Mount U-Bracket**Materials:** Die Cast Aluminum Housing, PMMA Optics**Housing Color:** Natural Aluminum**Ambient Temperature Range:** -40°C to +80°C**Waterproof Rating:** IP67**Warranty:** Yes - 3 Years

3 year warranty replacement on this LED light. After 30 days, the customer ships the failed LED light and/or LED bulb to Larson Electronics at their expense. If the failure is a manufacturer defect, we will ship a new replacement to the customer. If failure occurs within 30 days of receipt, Larson Electronics will provide a return label via email to the customer. When the failed light is returned, Larson Electronics will ship a new replacement.

[Scroll Down to Purchase-](#)

Part #: [GAU-LTL-500W-LED \(104751\)](#)

Quick Summary

1000 Watt Metal Halide Replacement

Ambient Op Temp -40C to +80C

Ideal for Light Towers & LED Retrofits

98% Transmission High Purity PMMA Optics

Multiple LED Banks for Heat Dispersion

120 Lumens Per Watt Efficiency

70% Lumen Retention after 80,000 Hours

UL1012 Compliant

UL60950-1 Compliant

CE Certified

RoHS Compliant

IP67 Rated Waterproof

Special Orders- Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671**Intl:** 1-903-498-3363**E-mail:** sales@larsonelectronics.com





Links (Click on the below items to view):

- [Dimensional Drawing](#)
- [IES](#)
- [Hi-Res Image 1 - 500 Watt High Intensity LED Light](#)
- [Hi-Res Image 2 - 500 Watt High Intensity LED Light](#)
- [Hi-Res Image 3 - 500 Watt High Intensity LED Light](#)
- [Hi-Res Image 4 - 500 Watt High Intensity LED Light](#)
- [Hi-Res Image 5 - 500 Watt High Intensity LED Light](#)

- Hi-Res Image 6 - 500 Watt High Intensity LED Light
- Hi-Res Image 7 - 500 Watt High Intensity LED Light
- Hi-Res Image 8 - 500 Watt High Intensity LED Light
- Hi-Res Image 9 - 500 Watt High Intensity LED Light
- Hi-Res Image 10 - 500 Watt High Intensity LED Light