

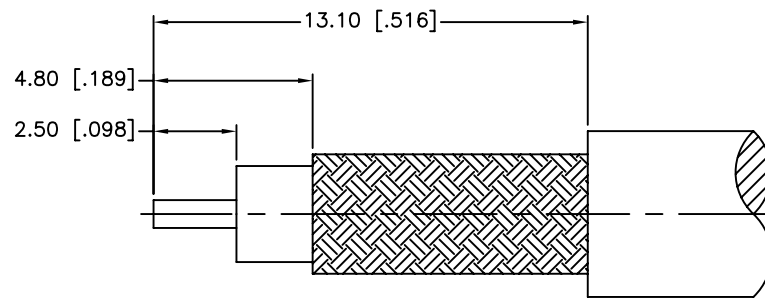


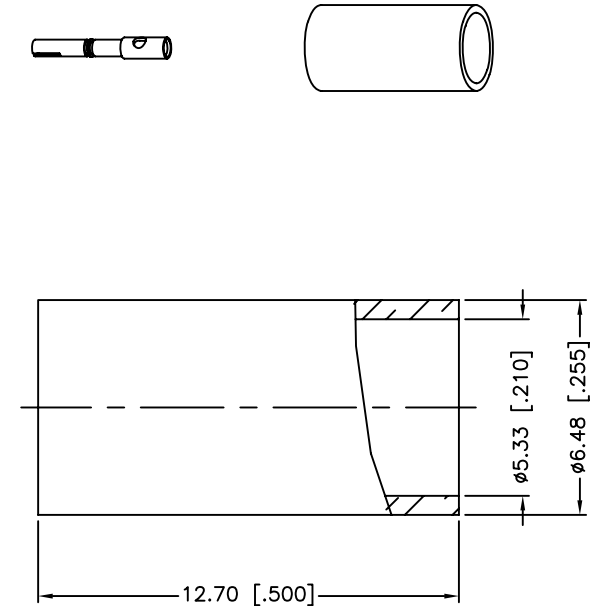


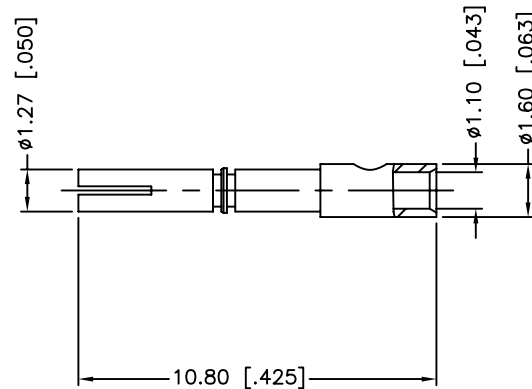

RECOMMENDED
CABLE STRIPPING DIM'S

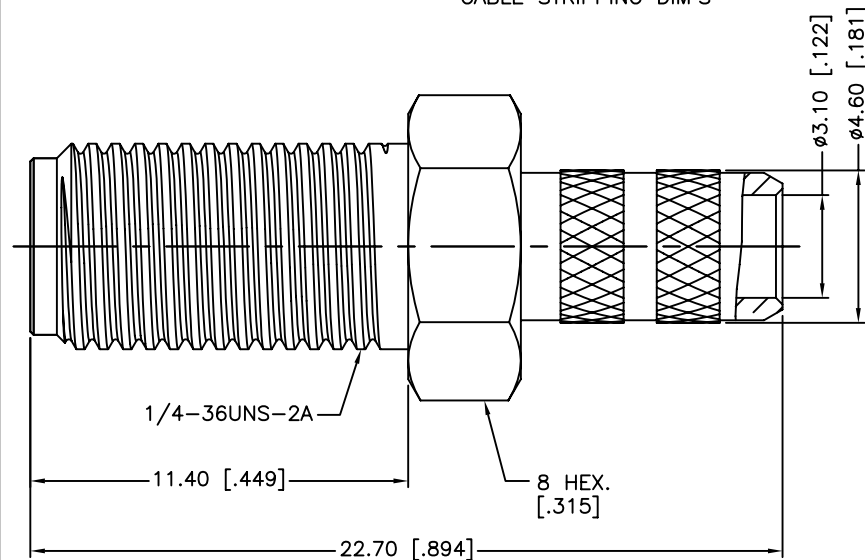

REV.	DATE	ECR NO.	DESCRIPTION
NC	10/10/07	XXXXXX	INITIAL RELEASE
A	10/18/11	2232	CHANGE THE CENTER CONTACT
B	09/14/12	2372	CHANGE THE CENTER CONTACT AND BODY

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC 0-12.4 GHZ
3. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
4. CRIMPED FERRULE
HEX CRIMP SIZE .213"
5. CONTACT PIN TO SOLDER

4	FERRULE	COPPER	GOLD	1
3	CONTACT PIN	BER. COPPER	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.			
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:			
0.5 - 8mm ± 0.20mm			
8 - 30mm ± 0.40mm			
30 - 120mm ± 0.50mm			
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:			
.020 - .315 = ± 0.007"			
.315 - 1.180 = ± 0.015"			
1.180 - 4.724 = ± 0.020"			
DO NOT SCALE DRAWING			

APPROVALS	DATE
DRAWN M.ZHANG	09/14/12
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/CONNEX/132116.DWG	

Amphenol Connex			
PART DESCRIPTION			
SMA CRIMP JACK (FOR RG-58C/U, 58/U CABLE)			
PART NO.			
132116			
DWG. NO.	132116.DWG	REV.	B
SIZE	A	SCALE	NA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[132116](#)