

Solid Tantalum Chip Capacitors TANTAMOUNT[®], Hi-Rel COTS, Ultra-Low ESR, Conformal Coated Case



FEATURES

- High reliability; Weibull failure rate grading available
- Surge current testing per MIL-PRF-55365 options available
- Ultra-low ESR
- Tin/lead (SnPb) termination available
- Mounting: Surface mount
- Compliant to RoHS Directive 2002/95/EC


RoHS*
COMPLIANT

Note

* Pb containing terminations are not RoHS compliant, exemptions may apply

PERFORMANCE CHARACTERISTICS

www.vishay.com/doc?40088

Operating Temperature: - 55 °C to + 85 °C
(To + 125 °C with voltage derating)

Capacitance Range: 10 µF to 1500 µF

Capacitance Tolerance: ± 10 %, ± 20 % standard

Voltage Rating: 4 V_{DC} to 75 V_{DC}

ORDERING INFORMATION

T97	R	227	K	020	E	S	A
TYPE	CASE CODE	CAPACITANCE	CAPACITANCE TOLERANCE	DC VOLTAGE RATING AT + 85 °C	TERMINATION/ PACKAGING (available options are series dependent)	RELIABILITY LEVEL	SURGE CURRENT
	See Ratings and Case Code table	This is expressed in pF. The first two digits are the significant figures. The third is the number of zeros to follow.	K = ± 10 % M = ± 20 %	This is expressed in volts. To complete the three-digit block, zeros precede the voltage rating. A decimal point is indicated by an "R" (6R3 = 6.3 V).	E = Sn/Pb solder/ 7" (178 mm) reel L = Sn/Pb solder/ 7" (178 mm), 1/2 reel C = 100 % tin/ 7" (178 mm), reel H = 100 % tin/ 7" (178 mm), 1/2 reel	A = 1.0 % Weibull B = 0.1 % Weibull ⁽¹⁾ S = 40 h burn-in Z = Non-established reliability	A = 10 cycles at + 25 °C B = 10 cycles at - 55 °C/ + 85 °C S = 3 cycles at 25 °C

Notes

- (1) Available on select ratings. See "Standard Ratings" table.
- We reserve the right to supply higher voltage ratings and tighter capacitance tolerance capacitors in the same case size. Voltage substitutions will be marked with the higher voltage rating.

DIMENSIONS in inches [millimeters]

CASE CODE	L (MAX.)	W	H	A	B	D (REF.)	J (MAX.)
E	0.299 [7.6]	0.173 ± 0.016 [4.4 ± 0.4]	0.157 ± 0.016 [4.0 ± 0.4]	0.051 ± 0.012 [1.3 ± 0.3]	0.181 ± 0.024 [4.6 ± 0.6]	0.252 [6.4]	0.004 [0.1]
F	0.299 [7.6]	0.236 ± 0.016 [6.0 ± 0.4]	0.185 ± 0.016 [4.7 ± 0.4]	0.055 ± 0.016 [1.4 ± 0.4]	0.181 ± 0.024 [4.6 ± 0.6]	0.244 [6.2]	0.004 [0.1]
R	0.299 [7.6]	0.236 ± 0.016/- 0.024 [6.0 ± 0.4/- 0.6]	0.142 ± 0.016 [3.6 ± 0.4]	0.051 ± 0.012 [1.3 ± 0.3]	0.181 ± 0.024 [4.6 ± 0.6]	0.244 [6.2]	0.004 [0.1]
V	0.299 [7.6]	0.173 ± 0.016 [4.4 ± 0.4]	0.079 [2.0 max.]	0.051 ± 0.012 [1.3 ± 0.3]	0.181 ± 0.024 [4.6 ± 0.6]	0.252 [6.4]	0.004 [0.1]
Z	0.299 [7.6]	0.236 ± 0.016 [6.0 ± 0.4]	0.236 ± 0.016 [6.0 ± 0.4]	0.055 ± 0.016 [1.4 ± 0.4]	0.181 ± 0.024 [4.6 ± 0.6]	0.244 [6.2]	0.004 [0.1]
D	0.299 [7.6]	0.173 ± 0.016 [4.4 ± 0.4]	0.138 [3.5 max.]	0.051 ± 0.012 [1.3 ± 0.3]	0.181 ± 0.024 [4.6 ± 0.6]	0.252 [6.4]	0.004 [0.1]
M	0.315 [8]	0.260 ± 0.016/- 0.024 [6.6 ± 0.4/- 0.6]	0.142 ± 0.016 [3.6 ± 0.4]	0.051 ± 0.012 [1.3 ± 0.3]	0.197 ± 0.024 [5.0 ± 0.6]	0.260 [6.6]	0.004 [0.1]
H	0.315 [8]	0.260 ± 0.016/- 0.024 [6.6 ± 0.4/- 0.6]	0.205 ± 0.016 [5.2 ± 0.4]	0.055 ± 0.016 [1.4 ± 0.4]	0.197 ± 0.024 [5.0 ± 0.6]	0.260 [6.6]	0.004 [0.1]
N	0.315 [8.0]	0.259 ± 0.016/- 0.024 [6.6 ± 0.4/- 0.6]	0.252 ± 0.016 [6.4 ± 0.4]	0.056 ± 0.017 [1.4 ± 0.4]	0.196 ± 0.025 [5.0 ± 0.6]	0.259 [6.6]	0.004 [0.1]

Note

- The anode termination (D less B) will be a minimum of 0.012" [0.3 mm]

**RATINGS AND CASE CODES**

μF	4 V	6.3 V	10 V	16 V	20 V	25 V	35 V	50 V	63 V	75 V
10									D	R ⁽¹⁾
15								E/R	R	
22								R	F	
33								F		
47							R	Z/N		
68						R	F			
100						F	F			
150						F				
220				E	R	M				
330		V	E	F	H/F					
470	V	E	E	H						
680	E	E	R							
1000	E/R	R	F							
1500	R									

Note

(1) Contact factory for availability

STANDARD RATINGS

CAPACITANCE (μF)	CASE CODE	PART NUMBER	MAX. DCL AT + 25 °C (μA)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. ESR AT + 25 °C 100 kHz (mΩ)	MAX. RIPPLE 100 kHz I _{RMS} (A)	AVAILABLE RELIABILITY LEVELS
4 V_{DC} AT + 85 °C; 2.7 V_{DC} AT + 125 °C							
470	V	T97V477(1)004(2)(4)(5)	19	8	60	2.2	A, B, S, Z
680	E	T97E687(1)004(2)(4)(5)	27	6	25	2.9	A, B, S, Z
1000	E	T97E108(1)004(2)(4)(5)	40	8	20	3.3	A, B, S, Z
1000	R	T97R108(1)004(2)(4)(5)	40	8	18	3.7	A, B, S, Z
1500	R	T97R158(1)004(2)(4)(5)	60	8	24	4.1	A, B, S, Z
6.3 V_{DC} AT + 85 °C; 4 V_{DC} AT + 125 °C							
330	V	T97V337(1)6R3(2)(4)(5)	21	8	56	2.0	A, B, S, Z
470	E	T97E477(1)6R3(2)(4)(5)	30	6	30	2.7	A, B, S, Z
680	E	T97E687(1)6R3(2)(4)(5)	43	6	25	2.9	A, B, S, Z
1000	R	T97R108(1)6R3(2)(4)(5)	63	8	20	3.5	A, B, S, Z
10 V_{DC} AT + 85 °C; 7 WV_{DC} AT + 125 °C							
330	E	T97E337(1)010(2)(4)(5)	33	6	35	2.5	A, B, S, Z
470	E	T97E477(1)010(2)(4)(5)	47	6	28	2.8	A, B, S, Z
680	R	T97R687(1)010(2)(6)(5)	68	6	28	3	S, Z
1000	F	T97F108(1)010(2)(3)(5)	100	20	120	1.4	A, S, Z
16 WV_{DC} AT + 85 °C; 10 V_{DC} AT + 125 °C							
220	E	T97E227(1)016(2)(4)(5)	35	8	60	2.3	A, B, S, Z
330	F	T97F337(1)016(2)(4)(5)	53	10	100	1.6	A, B, S, Z
470	H	T97H477(1)016(2)(4)(5)	75	14	100	1.4	A, B, S, Z
20 V_{DC} AT + 85 °C; 13 V_{DC} AT + 125 °C							
220	R	T97R227(1)020(2)(4)(5)	44	8	80	1.8	A, B, S, Z
330	F	T97F337(1)020(2)(6)(5)	66	10	100	1.6	S, Z
330	H	T97H337(1)020(2)(4)(5)	66	10	100	1.6	A, B, S, Z
25 V_{DC} AT + 85 °C; 17 V_{DC} AT + 125 °C							
68	R	T97R686(1)025(2)(4)(5)	17	6	100	1.6	A, B, S, Z
100	F	T97F107(1)025(2)(4)(5)	25	8	100	1.6	A, B, S, Z

Notes

- Part number definitions:
 - Capacitance tolerance: K, M
 - Termination and packaging: C, E, H, L
 - Reliability level: A, S, Z
 - Reliability level: A, B, S, Z
 - Surge current: A, B, S
 - Reliability level: S, Z
- Contact factory for availability

**STANDARD RATINGS**

CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DCL AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. ESR AT + 25 °C 100 kHz (m Ω)	MAX. RIPPLE 100 kHz I _{RMS} (A)	AVAILABLE RELIABILITY LEVELS
25 V_{DC} AT + 85 °C; 17 V_{DC} AT + 125 °C							
150	F	T97F157(1)025(2)(4)(5)	38	8	80	1.8	A, B, S, Z
220	M	T97M227(1)025(2)(3)(5)	55	8	100	1.6	A, S, Z
35 V_{DC} AT + 85 °C; 23 V_{DC} AT + 125 °C							
47	R	T97R476(1)035(2)(4)(5)	17	6	80	1.8	A, B, S, Z
68	F	T97F686(1)035(2)(3)(5)	24	6	100	1.6	A, S, Z
100	F	T97F107M035(2)(3)(5)	35	8	100	1.6	A, S, Z
50 V_{DC} AT + 85 °C; 33 V_{DC} AT + 125 °C							
15	E	T97E156(1)050(2)(4)(5)	8	6	300	0.9	A, B, S, Z
15	R	T97R156(1)050(2)(4)(5)	8	6	250	1	A, B, S, Z
22	R	T97R226(1)050(2)(4)(5)	11	6	170	1.2	A, B, S, Z
33	F	T97F336(1)050(2)(3)(5)	17	6	150	1.3	A, S, Z
47	Z	T97Z476(1)050(2)(6)(5)	24	6	145	1.4	S, Z
47	N	T97N476(1)050(2)(4)(5)	24	6	150	1.4	A, B, S, Z
63 V_{DC} AT + 85 °C; 42 V_{DC} AT + 125 °C							
10	D	T97D106(1)063(2)(3)(5)	10	6	400	0.6	A, S, Z
15	R	T97R156(1)063(2)(6)(5)	10	6	400	0.8	S, Z
22	F	T97F226(1)063(2)(3)(5)	14	6	200	1.1	A, S, Z
75 V_{DC} AT + 85 °C; 50 V_{DC} AT + 125 °C							
10	R ⁽¹⁾	T97R106(1)075(2)(6)(5)	8	6	500	0.7	S, Z

Notes

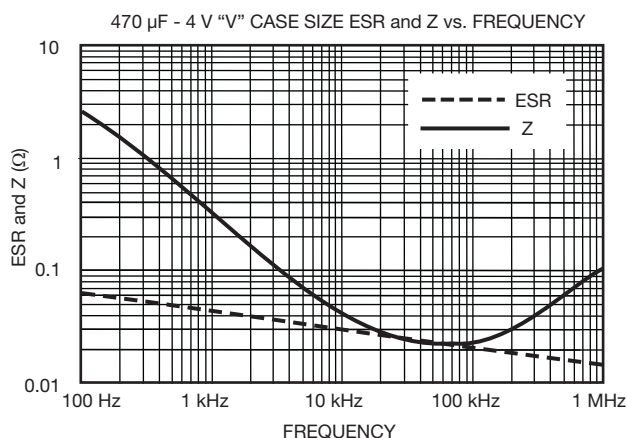
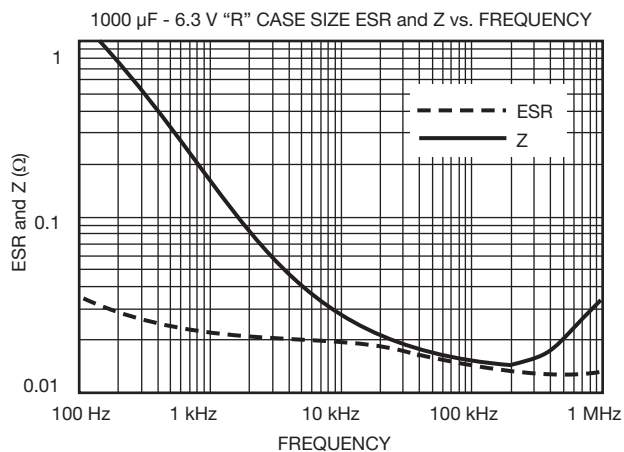
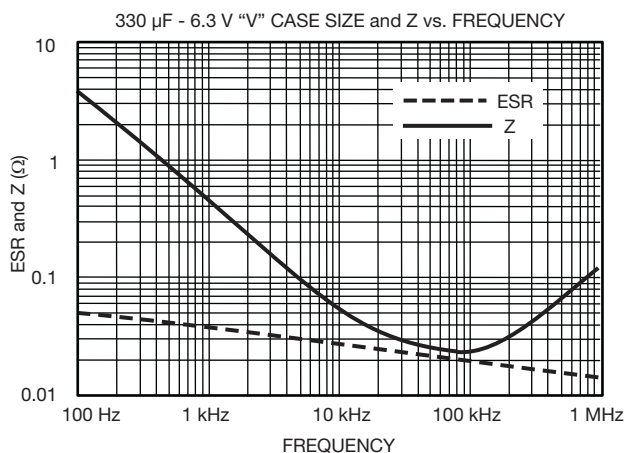
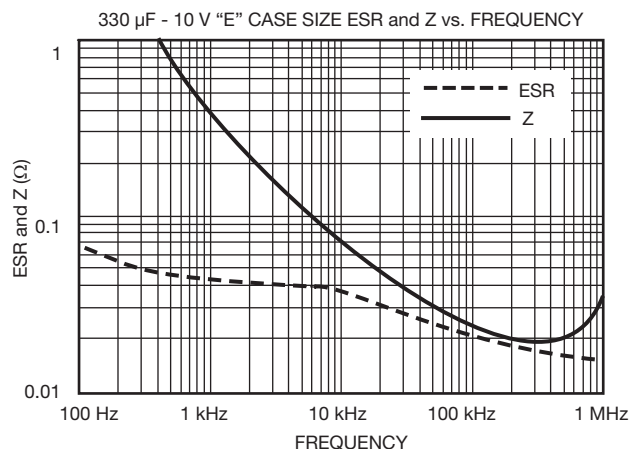
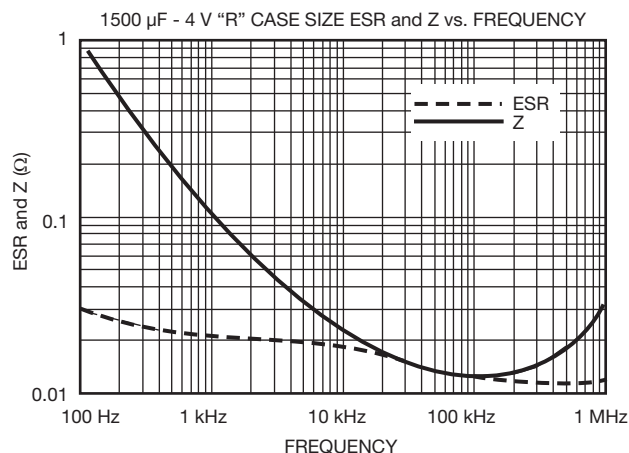
- Part number definitions:
 - Capacitance tolerance: K, M
 - Termination and packaging: C, E, H, L
 - Reliability level: A, S, Z
 - Reliability level: A, B, S, Z
 - Surge current: A, B, S
 - Reliability level: S, Z
- Contact factory for availability

RECOMMENDED VOLTAGE DERATING GUIDELINES (for temperatures below + 85 °C)**STANDARD CONDITIONS. FOR EXAMPLE: OUTPUT FILTERS**

Capacitor Voltage Rating	Operating Voltage
4.0	2.5
6.3	3.6
10	6.0
16	10
20	12
25	15
35	24
50	28
63	37.8
75	45

SEVERE CONDITIONS. FOR EXAMPLE: INPUT FILTERS

Capacitor Voltage Rating	Operating Voltage
4.0	2.5
6.3	3.3
10	5.0
16	8.0
20	10
25	12
35	15
50	24
63	32
75	37

TYPICAL CURVES


**POWER DISSIPATION**

CASE CODE	MAXIMUM PERMISSIBLE POWER DISSIPATION AT + 25 °C (W) IN FREE AIR
D	0.215
E	0.240
F, R, M	0.250
H	0.265
N	0.280
V	0.141
Z	0.265

STANDARD PACKAGING QUANTITY

CASE CODE	UNITS PER REEL	
	7" FULL REEL	7" HALF REEL
D	400	200
E	500	250
F	250	125
H	200	100
M	200	100
N	200	100
R	300	150
V	1000	500
Z	250	125

PRODUCT INFORMATION

COTS Guide for Tantalum Capacitors	www.vishay.com/doc?40083
Pad Dimensions	
Packaging Dimensions	
Moisture Sensitivity	www.vishay.com/doc?40135
SELECTOR GUIDES	
Solid Tantalum Selector Guide	www.vishay.com/doc?49053
FAQ	
Frequently Asked Questions	www.vishay.com/doc?40110



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.