


Cable, MOOS Benthic Copper Part-Number FM092806-1CP

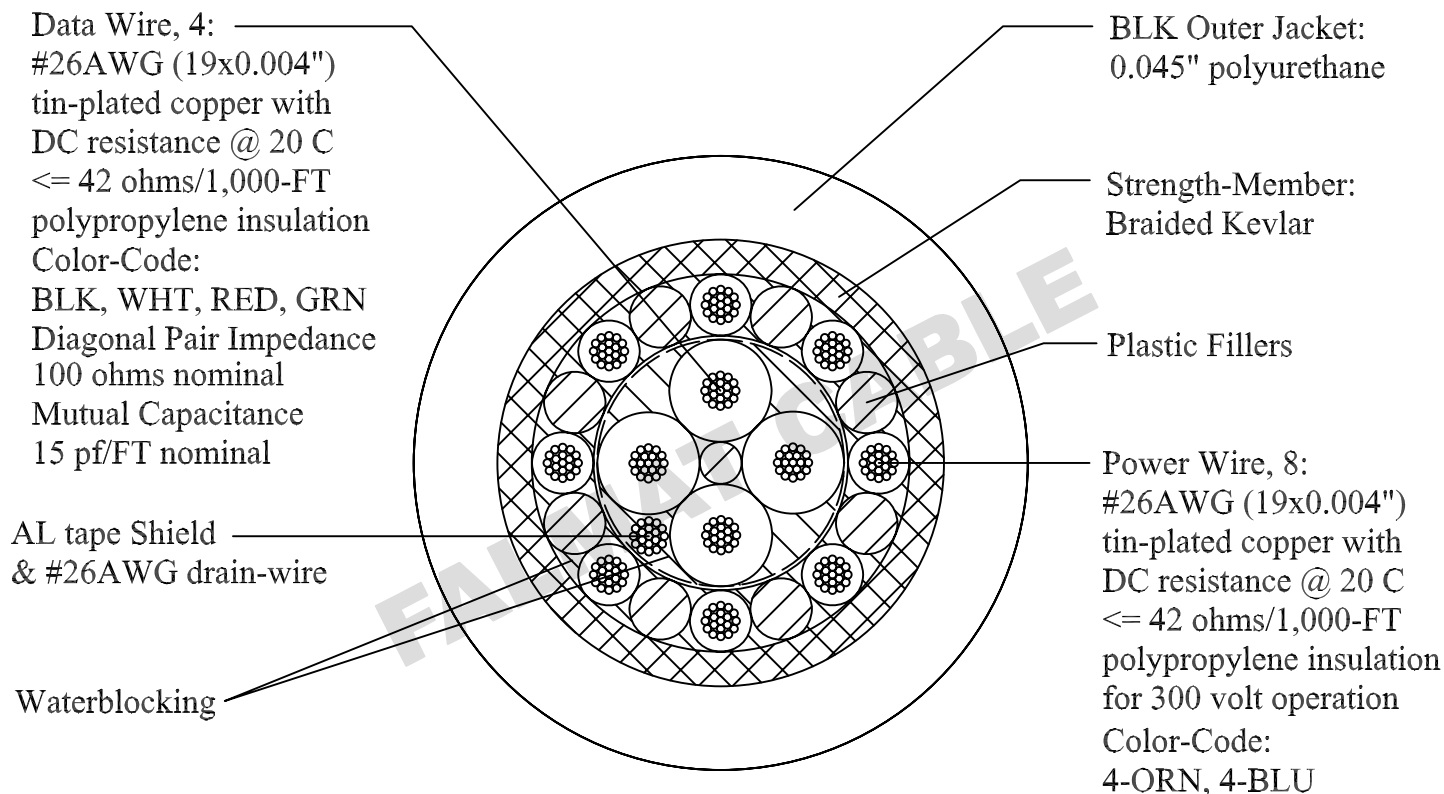

Overall Diameter = 0.330 inch nominal
Weight in Air = 51 lbs/1,000 feet nominal
Weight in Sea = 13 lbs/1,000 feet nominal
Breaking Strength = 2,000 lbs nominal
Peak Tension Load = 300 lbs maximum
Bend Radius = 6 inch minimum

Designed for MBARI
September 28, 2006
NOT TO SCALE