


LITHIUM BROMINE CHLORIDE CELL

Technical Overview

Open Circuit Voltage (25°C)	3.9 V
Rated Discharge Current	350 mA
Rated Capacity	30 Ah
Maximum Continuous Current	3.0 A
Cell Diameter	33.5 mm (1.32 in.)
Cell Length	111.5 mm (4.39 in.)
Cell Weight	216 g
Lithium Weight	10.2 g
Safety Fuse	4.0 A
Self Discharge	3% per year at 25°C
Operating Temperature	-55°C to +85°C
	-67°F to +185°F

Capacity as a function of current and temperature

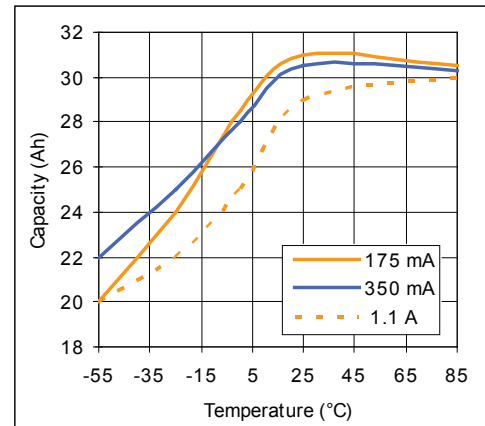


Key Features:

- Primary chemistry (non-rechargeable)
- High rate capability
- Advanced spiral-wound technology
- Stainless steel container
- Hermetic glass-to-metal sealing
- Wide operating temperature range as low as -55°C and up to +85°C
- Low self discharge rate (3% per year at 25°C)
- Restricted for transportation (Class 9)
- Custom terminations available

Main Applications:

- Military communications
- Oceanographic buoys and gliders
- Tracking systems
- Sensor systems
- Pipeline inspection gauges
- Beacons, transponders and receivers
- Seismic surveying birds

25°C discharge

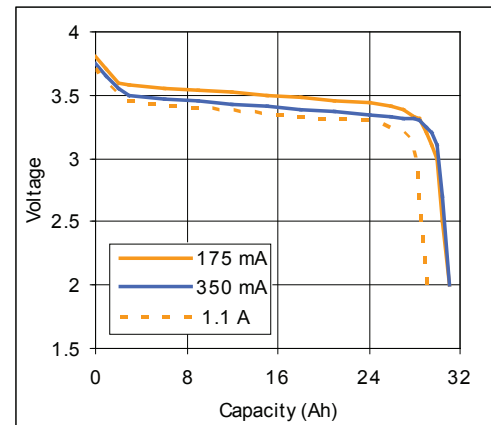

NOTICE: The information on this datasheet is for single cells only. Please consult with Electrochem if you are interested in additional information. The information in this document is subject to change without notice and does not constitute a warranty of performance.

THIS PRODUCT IS AVAILABLE FROM
WWW.BATTERYSPECIALTIES.COM
 800-854-5759, 800-352-3706 in CA



A subsidiary of Greatbatch®