



- [Locations](#)
- [Credit Application](#)
- [Careers](#)


- [Markets](#)
- [Brands](#)
 - [Gortite](#)
 - [Gortrac](#)
 - [Polyclutch](#)
 - [LSI](#)
 - [Ro-Lab](#)
 - [MFB Technik](#)
 - [Halltech GmbH](#)
- [Products](#)
 - [Cable & Hose Carriers](#)
 - [Mechanical Motion Control](#)
 - [Elastomer Products](#)
 - [Protective Covers](#)
- [Services](#)
 - [Ball Screw Repair](#)
 - [Telaflex Repair Service](#)
- [About Us](#)
 - [Company Information](#)
 - [Locations](#)
 - [Press Releases](#)
 - [Tradeshows](#)
 - [Careers](#)
- [Literature](#)
- [Contact](#)
 - [Contact](#)
 - [Find a Rep](#)
 - [RFO's](#)
 - [Credit Application](#)
 - [Email Sign Up](#)
- [Dynatect Home](#)
- [:](#)
- [Protective Covers](#)
- [:](#)
- [Bellows](#)
- [:](#)
- [Standard Bellows](#)
- [:](#)
- [Gortiflex Stock Tubing](#)

Gortiflex Tubing

Flexible Connections and Convolved Tubing from Stock: Gortiflex Molded Bellows

Gortiflex stock bellows can be used as covers for screws, rods, ball splines. They can also be applied as flexible connections where vibration, movement or misalignment is involved. Available from stock, shipment is typically within 1-2 business days. They are available in two styles: CT and CTH. CT units are made from 0.060" thick (+/- 0.010") Goralon elastomer reinforced with outer nylon stocking, and are available in 13 stock sizes: from 1 to 10 inch I.D., and 24" extended lengths. CTH units are made from 0.030" thick (+/- 0.05") Goralon elastomer, and are available in 6 stock sizes:

from 0.75 to 2 inch I.D., and extended lengths of 12" or 24".



[Overview](#)

[CT DESIGN SPECS](#)


- [CTH Design Specs](#)

CT Design Specifications



Gortiflex CT style bellows are available in 13 stock sizes, from 1 to 10 inch I.D. and 24" extended lengths.

Style Number	Bellows I.D.	Bellows O.D.	Extended Length	Retracted Length
CT-1	1"	1-3/4"	24"	5-1/4"
CT-1.5	1-1/2"	2-3/8"	24"	4-1/2"
CT-2	2"	3"	24"	4"
CT-2.5	2-1/2"	3-1/2"	24"	4"
CT-3	3"	4-1/4"	24"	3-1/4"
CT-3.5	3-1/2"	5"	24"	3"
CT-4	4"	5-1/2"	24"	3"
CT-4.5	4-1/2"	6"	24"	3"
CT-5	5"	6-3/4"	24"	2-1/2"
CT-6	6"	8"	24"	2-1/4"
CT-7	7"	9"	24"	2-1/4"
CT-8	8"	10"	24"	2-1/4"
CT-10	10"	12"	24"	2-1/4"

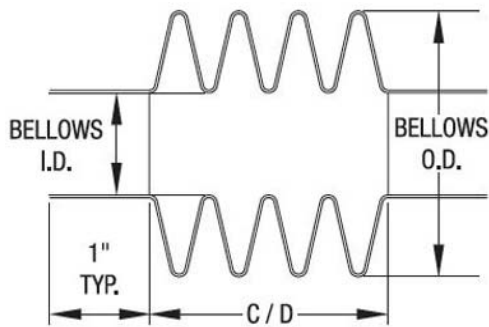

- For light- to medium-duty environments (oil, dirt, chips & other abrasives)
- Chemical & UV resistance
- Material: 0.060" thick (+/- 0.010") Goralon elastomer reinforced with outer nylon stocking
- Operating temperature range: -30° F to 260° F*
- Ends consist of a 1" long collar on each end for mounting with optional clamps (collars can be removed to provide flanges)
- Easy mounting with clamps, stocked in all sizes (clamp band width is ½ inch)

(*Temperatures represent operating ranges for compounds in laboratory tests. Operating temperature range for Goralon™ in a bellows application may vary dependent on other environmental conditions. Consult A&A Mfg for assistance in product specification.)

APPLICATIONS/MARKETS

- [Machine Tool](#)
- [Oil & Gas](#)
- [Transportation](#)
- [Medical/Automation](#)
- [Construction/Agriculture](#)
- [MRO/Other](#)

RELATED PRODUCTS

[Standard Bellows - Gortiflex Convoluted Tubing](#)

[Standard Bellows - Gortiflex Dieset Shield](#)

[Standard Bellows - Gortite Sewn Cylinder Bellows](#)

[Request a Quote](#)

[Get More Information](#)

Markets

- [Transportation](#)
- [Medical/Automation](#)
- [Oil and Gas](#)
- [Construction/Agriculture](#)
- [Machine Tool](#)
- [MRO-Other](#)

• Brands

- [Gortite](#)
- [Gortrac](#)
- [Polyclutch](#)
- [LSI](#)
- [Ro-Lab](#)
- [MFB Technik](#)
- [Halltech GmbH](#)

• Products

- [Cable & Hose Carriers](#)
- [Mechanical Motion Control](#)
- [Elastomer Products](#)
- [Protective Covers](#)

• Services

- [Ball Screw Repair](#)
- [Telaflex Repair Service](#)

GLOBAL HEADQUARTERS

2300 South Calhoun
Road
New Berlin, WI 53151
U.S.A.
Phone: +1 262 317-
9191
Fax: +1 262 786-3280

- [LinkedIn](#)
- [Facebook](#)
- [Twitter](#)
- [Google Plus](#)
- [YouTube](#)

© 2014 : [Sitemap](#) : [Privacy Policy](#) : [Terms & Conditions](#)