


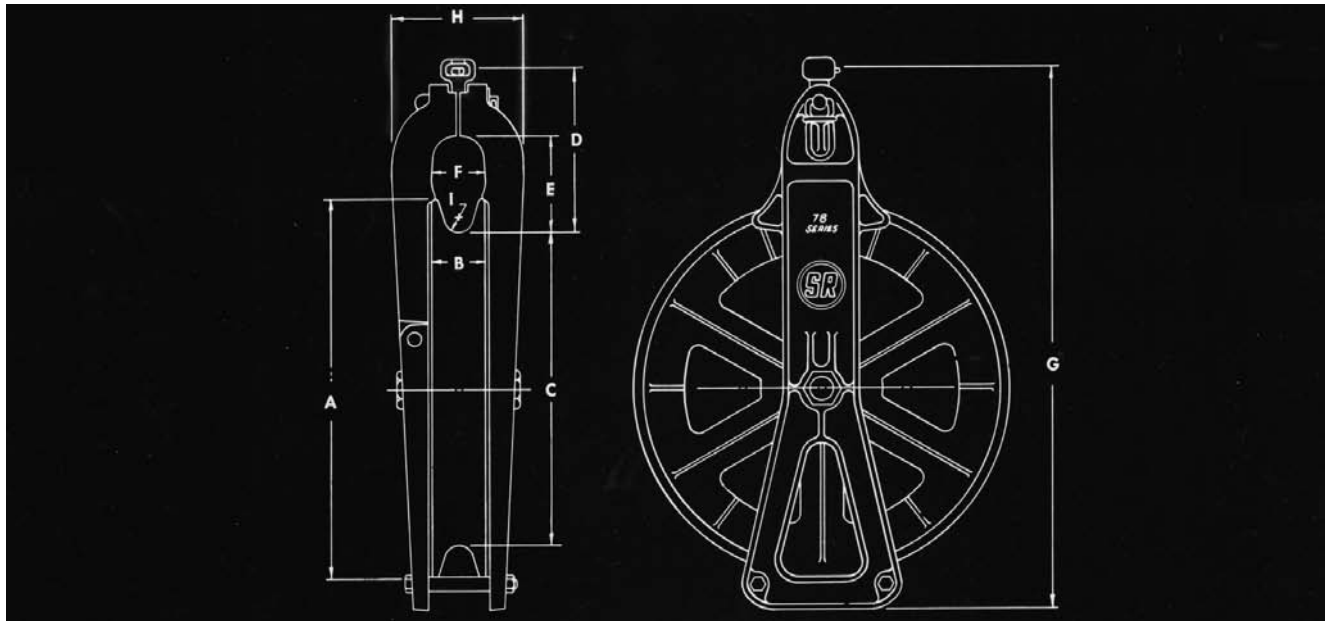

COMPLETE DIMENSIONS

Size	Outside Sheave Dia.	Rim Width	Bottom Groove Dia.		Point of Connection to Bottom of Groove		Throat			Overall Length	Width Widest Point	Radius Bottom Groove
							Height		Width			
	A	B	C		D		E		F	G	H	I
			*	**	*	**	*	**				***
20	20	31/8	16	161/4	9 13/16	9 11/16	511/16	59/16	31/8	299/16	75/8	13/16
22	22	31/8	18	181/8	9 13/16	9 3/4	511/16	55/8	31/8	319/16	75/8	13/16
28	28	31/4	233/4	24	9 15/16	9 13/16	513/16	511/16	31/4	379/16	73/4	7/8
28-A	28	31/4	****	24	****	913/16	****	511/16	31/4	379/16	73/4	1
35	35	4	****	301/4	****	12 3/16	****	81/32	41/2	467/16	103/8	11/8
42	42	41/2	****	36	****	14 3/16	****	101/8	5	551/2	127/16	11/8

*Polished Groove Sheave.

***Remains same with or without Lined Sheave.

All Dimensions in Inches

**Lined Sheave

****Available with Lined Sheave only.

COMPLETE SPECIFICATIONS

Size	Maximum O.D. of Conductor		Max. Working * Load Limit, Lbs.	Block Weight, Lbs.
	Cir. Mils.	In.		
20	+	+	12,000	42
22	+	+	12,000	46
28	+	+	12,000	62
28-A	+	+	12,000	68
35	+	+	12,500	115
42	+	+	17,500	155

+ Refer to IEEE Standard 524-2003

* With Socket Connector

ADDITIONAL FITTINGS			
	#1 HOOK	#6 OVAL EYE	#8 UPSET SHACKLE
MODEL NO.:			

For Fittings Specifications and Ratings See Page 5-18

NOTICE

Sherman & Reilly, Inc. products are designed for use only with Sherman & Reilly component parts, attachments and accessories, and no other. Sherman & Reilly parts, accessories and attachments are designed for use only with Sherman & Reilly products. Use of Sherman & Reilly products, parts, attachments or accessories in conjunction with any other manufacturer's products, parts, attachments or accessories will void all express or implied Sherman & Reilly warranties, and Sherman & Reilly assumes no liability in connection with such use.

*Dimensions, weights, capacities are approximate. Manufacturer's specifications subject to change without notice.



SHERMAN & REILLY

400 West 33rd St. • Chattanooga, TN 37410 USA

Toll Free 1.800.251.7780 • Phone 423.756.5300 • Fax 423.756.2948

Web Site - <http://www.sherman-reilly.com> • E-Mail - sales@sherman-reilly.com



78 SERIES

Conductor Stringing Blocks

**STANDARD OF
THE BLOCK
INDUSTRY**

LOAD RATED

**LIGHT AND
RUGGED**

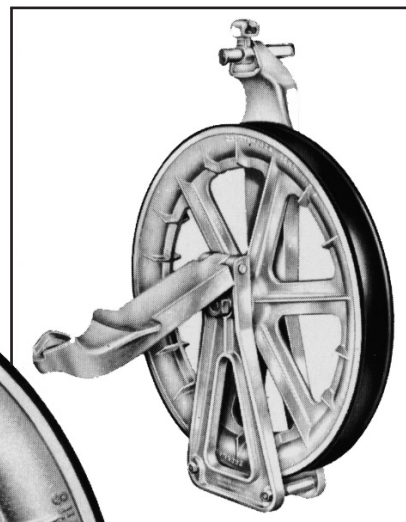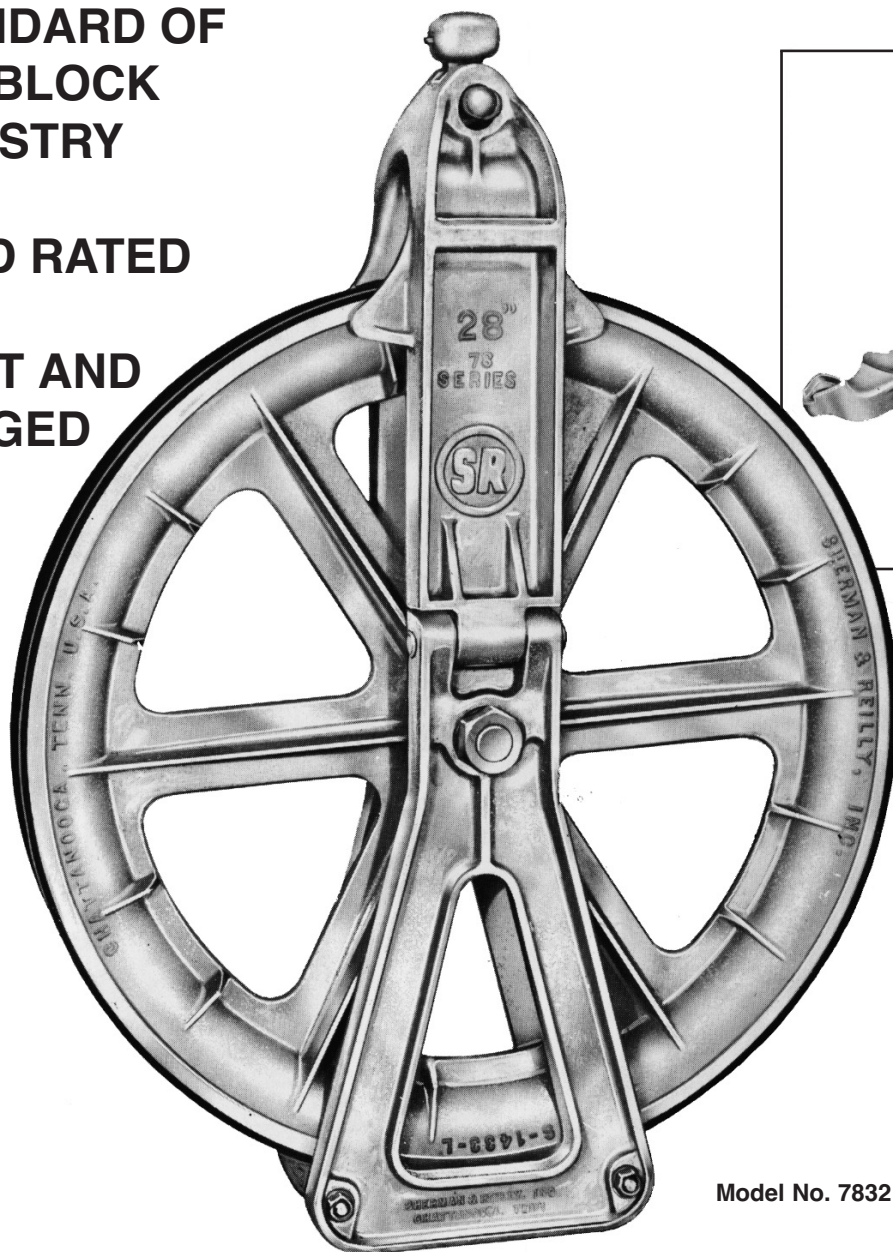

Model No. 7832

78 SERIES-CONDUCTOR STRINGING BLOCKS

For construction of single conductor type transmission lines, the 78 series has become the industry standard. Here is a block large enough for the bigger conductors yet still light and easy to handle. The throat section is sufficiently large to permit passage of sleeves and connections of most types encountered in new construction and reconductoring.

All aluminum alloy construction throughout. The sheave is mounted on anti-friction ball bearings for easy, accurate sagging. Socket connector fitting standard. S&R exclusive positive locking head pin. Convenient carrying handle on each side.