



P/N:3B36
CSC93

HIGH PERFORMANCE LITHIUM CELL

SIZE
DD

+ High Rate Capability

+ Lithium / Sulfuryl Chloride Chemistry

+ Custom terminations available

CELL SPECIFICATIONS

Open Circuit Voltage (25° C)	3.9 V
Rated Discharge Current	1.0 A
Rated Capacity	30 Ah
Maximum Continuous Current	4.0 A
Cell Diameter	33.5 mm (1.32 in.)
Cell Length	111.4 mm (4.39 in.)
Cell Weight	213g
Lithium Weight	10.2g
Safety Fuse	7.0 A
Self Discharge	3% per year at 25°C
Operating Temperature	-20°C to +93°C -4°F to +200°F

OPERATING TEMPERATURE


93°C

-20°C


Rev: Jan 2006

PROPRIETARY AND CONFIDENTIAL: Proprietary information is contained herein. It is not to be used, reproduced or disclosed to others without prior written consent by GREATBATCH LTD.

25°C discharge

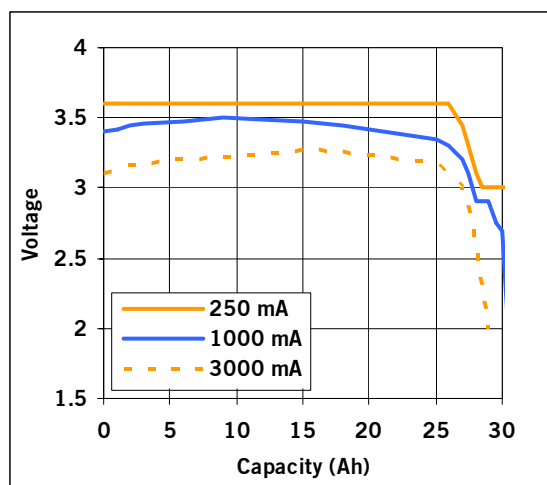

Capacity as a function of
current and temperature

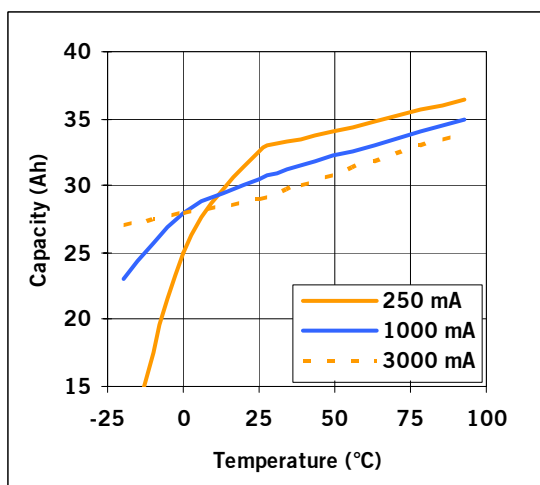

+ 9645 WEHRLE DRIVE, CLARENCE, NEW YORK 14031
+ 716.759.5800 TEL + 716.759.2562 FAX + WWW.ELECTROCHEMPOWER.COM
+ SALES@ELECTROCHEMPOWER.COM + A DIVISION OF GREATBATCH LTD.



THE WORLD'S MOST RELIABLE > MOST DURABLE > LONGEST-LASTING > CELLS AND BATTERY PACKS