



VICI® Valco Instruments Co. Inc.
VICI AG International



[HOME](#) | [PRODUCTS](#) | [CUSTOMER SERVICE](#) | [SEARCH](#)

Cheminert Valves

PRODUCTS

[What's new](#)
[Actuators](#)
[Calibration gas standards](#)
[Columns](#)
[Fittings](#)

- [Cheminert](#)
- [Valco](#)
- [Overview](#)

[Flow, pressure, and on/off controllers](#)
[Gas purifiers](#)
[GC accessories](#)
[GC detectors](#)
[HayeSep porous polymers](#)
[Injectors/valves](#)


- [Cheminert](#)
- [Valco](#)
- [Diaphragm](#)
- [Overview](#)
- [Accessories](#)

[Liquid handling](#)
[Portable gas monitors](#)
[Syringes](#)
[Tools](#)
[Trace gas analyzers](#)
[Tubing](#)

Low pressure stream selectors with 1/4-28 fitting details for 1/8" tubing Multicolored Cheminert 1/4-28 flangeless fittings for 1/8" tubing, 1.50 mm ports (.060")

Model C25

The Cheminert® Model C25 HPLC stream selector valve selects and isolates one of 4 to 10 streams, with the remainder dead-ended.

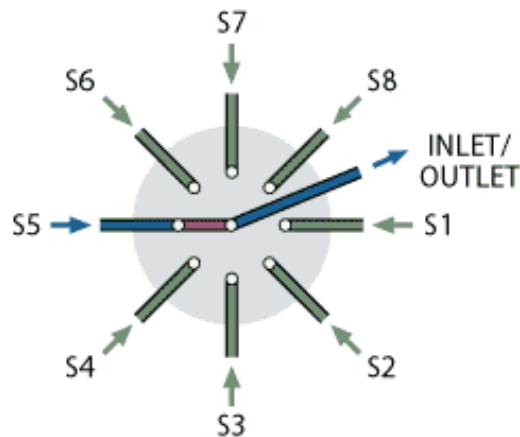

Product numbers

Select to jump to product numbers:

[4 position](#)
[6 position](#)
[8 position](#)
[10 position](#)

CUSTOMER SERVICE

[Support](#)
[Catalog request](#)
[Ordering information](#)
[Returns/repairs](#)
[Contact us](#)

VICI

[About us](#)
[Photo tour](#)
[Upcoming trade shows](#)

Actuation

Valves can be actuated manually or automated with pneumatic or electric actuators.
[Read more about actuators.](#)

Cheminert liquid handling valves rarely require a standoff. [Contact the factory](#) if you need one.

Options

[Consult the factory](#) for product numbers and pricing for the following options:

- 2", 3", 4", and 6" standoffs.

TOP ▲

Further reference

[More multiposition Cheminert valves](#) Properties of [polymers](#)

[Which valve do I need?](#)

Properties of [rotor materials](#)

[Valve actuation](#)

TOP ▲

4 position valves – Model C25

Low pressure stream selector - 1.50 mm ports (.060")

Includes multicolored Cheminert 1/4-28 flangeless fittings for 1/8" tubing.

Standard electric actuator:

110 VAC for USA; 110/230 VAC to 24 VDC power supply for international.

Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.

Specs	Actuation	Product No.
75°C max 100 psi gas/ 250 psi liq PPS stator Valcon E2 rotor	Manual	C25-6184
	With pneumatic actuator	C25-6184A
	With standard electric actuator	C25-6184E
	With microelectric actuator	C25-6184EMH
	Replacement parts	Product No.
	Valve <i>(for use with existing actuator)</i>	C25-6184D
	Rotor	C25-614
	Stator	C25-684

TOP ▲

6 position valves – Model C25

Low pressure stream selector - 1.50 mm ports (.060")

Includes multicolored Cheminert 1/4-28 flangeless fittings for 1/8" tubing.

Standard electric actuator:

110 VAC for USA; 110/230 VAC to 24 VDC power supply for international.

Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.

Specs	Actuation	Product No.
-------	-----------	-------------

75°C max 100 psi gas/ 250 psi liq PPS stator Valcon E2 rotor	Manual	C25-6186
	With pneumatic actuator	C25-6186A
	With standard electric actuator	C25-6186E
	With microelectric actuator	C25-6186EMH
	Replacement parts	Product No.
	Valve <i>(for use with existing actuator)</i>	C25-6186D
	Rotor	C25-616
	Stator	C25-686

TOP ▲

8 position valves – Model C25

Low pressure stream selector - 1.50 mm ports (.060")

Includes multicolored Cheminert 1/4-28 flangeless fittings for 1/8" tubing.

Standard electric actuator:

110 VAC for USA; 110/230 VAC to 24 VDC power supply for international.

Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.

Specs	Actuation	Product No.
75°C max 100 psi gas/ 250 psi liq PPS stator Valcon E2 rotor	Manual	C25-6188
	With pneumatic actuator	C25-6188A
	With standard electric actuator	C25-3188E
	With microelectric actuator	C25-6188EMH
	Replacement parts	Product No.
	Valve <i>(for use with existing actuator)</i>	C25-6188D
	Rotor	C25-618
	Stator	C25-688

TOP ▲

10 position valves – Model C25

Low pressure stream selector - 1.50 mm ports (.060")

Includes multicolored Cheminert 1/4-28 flangeless fittings for 1/8" tubing.

Standard electric actuator:

110 VAC for USA; 110/230 VAC to 24 VDC power supply for international.

Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.

Specs	Actuation	Product No.
75°C max 100 psi gas/ 250 psi liq PPS stator Valcon E2 rotor	Manual	C25-6180
	With pneumatic actuator	C25-6180A
	With standard electric actuator	C25-6180E
	With microelectric actuator	C25-6180EMH
	Replacement parts	Product No.
	Valve <i>(for use with existing actuator)</i>	C25-6180D
	Rotor	C25-610
	Stator	C25-680

TOP ▲

[Home](#) | [Products](#) | [Customer service](#) | [Contact](#) | [About VICI](#) | [Site map](#) | [Site index](#)

VICI® is a registered trademark of Valco Instruments Co. Inc. and VICI AG
© 2005 VICI