



PHYSICAL ARRANGEMENT  
OF CELLS IN PACK




END VIEW

WIRES EXIT TOP OF PACK NEAR EDGE

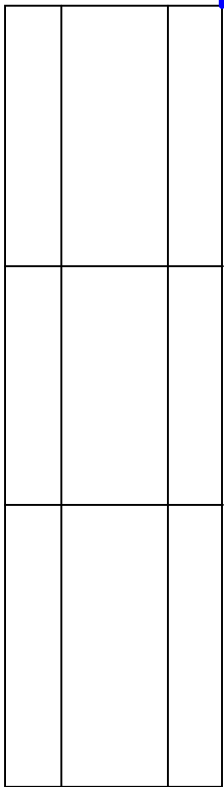

SIDE VIEW


LENGTH NOT TO  
EXCEED 5.9 INCHES



WIDTH NOT TO  
EXCEED 2.1 INCHES

- NOTES:
1. PACK IS 14.5 V, 8 AH
  2. BT1-BT9 ARE 1.5 V ALKALINE C CELLS
  3. SPOT-WELDED NICKEL STRIPS FOR ALL CONNECTIONS
  4. HEAT-SHRINK SLEEVE OVER ASSEMBLY
  5. FOR USE IN MCLANE SEDIMENT TRAP AGITATOR PUMP

4 INCH LEAD LENGTH

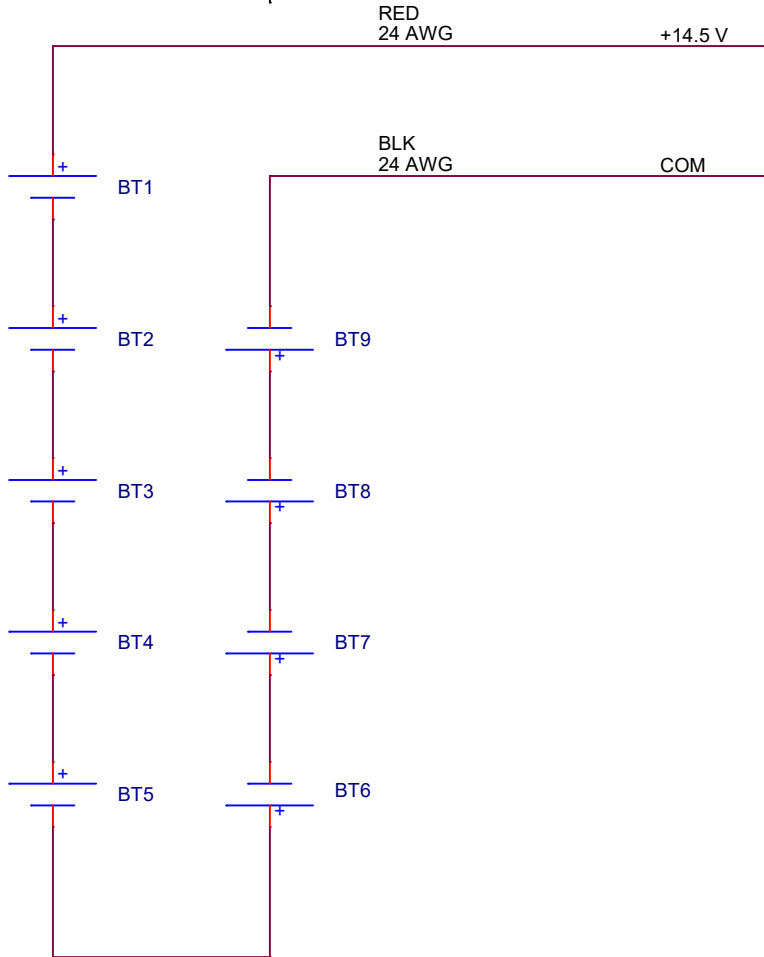

Revision History:  
v1.0.0 Initial release

|                                                        |                          |              |
|--------------------------------------------------------|--------------------------|--------------|
| Engineer: P. McGill                                    |                          |              |
| Title<br>Sediment Trap Agitator Pump: Alkaline Battery |                          |              |
| Size<br>A                                              | Document Number<br><Doc> | Rev<br>1.0.0 |
| Date:                                                  | Thursday, April 01, 2021 | Sheet 1 of 1 |