

Lung Inspired Deep Water Sampling Module

Douglas M. Pargett, Scott Jensen, Brent Roman, Chris Preston, Roman Marin III, Jim Birch, Chris Scholin

Abstract— A robotic system that can perform *in situ* microbiological identification and quantification of larvae, bacteria and other microscopic organisms at depths up to 4000m has been developed and deployed by the Monterey Bay Aquarium Research Institute. The system is composed of a low pressure detection instrument and a Deep Water Sampling Module that collects up to 10L of seawater and decompresses it for analysis. The architecture for the Deep Water Sampling Module was inspired by lungs and the mechanics of breathing.

Index Terms—Lung, Hydraulic, ...

I. INTRODUCTION

A PRIMARY goal of the Monterey Bay Aquarium Research Institute (MBARI) is to extend the operating depth and duration of ocean scientific instrumentation. The Environmental Sampling Processor (ESP) program utilizes custom designed robotic instruments for *in situ* identification and quantification of larvae, bacteria and other microscopic organisms in near real time [1], [2]. Collection and analysis *in situ* avoids the time lag and changes of state that occur when samples are sequestered and transported to the laboratory for analysis. Additionally, as a robotic system, the ESP can be deployed for months, tracking microbial activity over time without the need for human presence.

The ESP instrument filters a volume of the ambient seawater, concentrating sparse microbes for autonomous detection. This requires processing liters of the ambient seawater through the 500kPa rated fluidic system, resulting in a 50m operating depth limit. As the ESP instrument has numerous valves, fittings and remotely operated pressure seals, it was more feasible to develop a pressure modifying interface that could feed reduced pressure seawater to the instrument rather than redesign the instrument to perform the same functions at much higher pressure.

To use the ESP capabilities in the deep sea, MBARI developed a 4000m Deep Water Sampling Module (DWSM)

that could collect the seawater sample under high ambient pressure and then depressurize that water, so that the ESP instrument could safely filter and identify the microbes present. Out of several concepts, a differential pressure driven system inspired by lungs and the biological process of breathing presented the greatest potential. System design and fabrication found many parallels to lung structures and processes of inhaling and exhaling seawater, even to the point it garnered the nickname, “aqua-lung.”

II. DEEP WATER SAMPLING MODULE

The Deep Water Sampling Module is the interface between the ocean and the ESP instrument. The architecture of the 4000m DWSM consists of two similar two-story tower assemblies, Sample and Exhaust, fig. 1. Each tower consists of a central bulkhead plate sandwiched between identical pressure housings. The top housing being a dry atmospheric chamber containing control electronics, actuated valves and pump motors to direct the water and oil as needed. The bottom housing is a variable pressure oil filled chamber, containing a flexible bag for containing the seawater, as well as pumps and monitoring sensors. Outside of these towers is an external oil reservoir at ambient pressure.

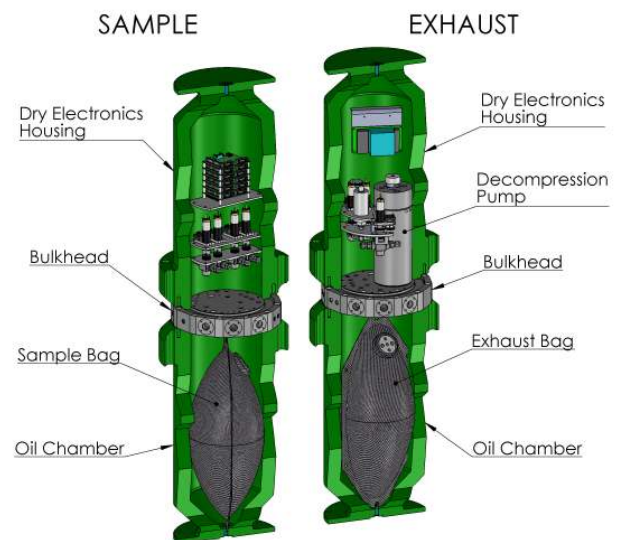


Fig. 1 Cutaway view of 4000m DWSM showing pressure chambers, bulkhead plates, and major components.

Starting in 2005, MBARI developed and tested the first deep ESP system to 1000m depth in the Monterey Bay canyon. It worked on a similar concept as the 4000m version, as it used

Manuscript received November 12, 2011. This work was supported in part by the National Aeronautics and Space Administration (NNG06GB34G), National Science Foundation (OCE-0314222), and by the David and Lucile Packard Foundation through MBARI.

D. M. Pargett is a mechanical engineer with Research and Development, Monterey Bay Aquarium Research Institute, Moss Landing, CA 95039 USA, (phone: 831-775-2073; fax: 831-775-1646; e-mail: pargett@mbari.org). Monterey Bay Aquarium Research Institute, Moss Landing, CA 95039 USA, (phone: 831-775-2073; fax: 831-775-1646; e-mail: pargett@mbari.org).

the same ESP instrument for microbiology identification, with an interface system that would sequester and decompress the seawater prior to filtering and analysis. However, the 1000m system was implemented by very different methods and hardware, and there were drawbacks and lingering problems with this architecture.

A. Review 1000m Deep ESP

The 1000m version used linear actuated cylinder and piston assemblies to collect and decompress seawater. One large cylinder was used to inhale and sequester the seawater, and another much smaller one to decompress the sequestered seawater. Once decompressed to a safe pressure range, the system would open valves to the ESP instrument; filter the water, passing the filtrate to the back side of the sample piston. After sampling, the ESP is isolated, and the cylinders recompressed to ambient pressure. Although the cylinder and piston method of the 1000m system appeared a straight forward approach to sequestering and decompressing *in situ*, many of the decisions in the 4000m DWSM development were based upon lessons learned from the 1000m system.

B. Needed more sample, 10L

In the deep ocean, microbial life can be much less abundant than at the surface. The 1000m Deep ESP used a 1.8L sequestered volume of seawater, which was not sufficient for the science goals. A 10L sample of raw seawater was estimated to be necessary. However, enlarging the 1000m architecture for a 10L volume would have been intractable to build and deploy into the ocean due to the size and weight of hardware required.

A drawback to the linear actuator and piston assemblies of the 1000m system is that the size of the mechanism is linearly proportional to the volume sampled. The length of the fully assembled linear actuator, anti-rotation rod, and piston cylinder was 1.15m. Increasing the sample volume of that diameter piston to 10L would have required a mechanism over 6m long. Alternatively, a larger diameter cylinder could be used to increase the sample volume, but at over five times the area, heavier actuators and pressure housings and higher capacity motor controllers and power supplies would have been needed.

C. Required active dynamic control.

The process of the 1000m system required that both linear actuators be powered and maintain position control at all times, otherwise the decompressed state could not be maintained. Sea pressure could back drive the linear actuator and piston if power was lost, returning the sequestered volume to ambient pressure very quickly, likely damaging the ESP instrument. To prevent this risk, we set a design goal that the 4000m DWSM process maintain instrument safe state in the event of any single mode failure.

D. Design for Testing

The sampling module acts as a controlled interface between the high pressure deep sea and the low pressure ESP. As such,

the sampling module is strongly affected by pressure and undesired conditions may only appear while under pressure. Such conditions may prevent the system from functioning, or may cause damaging instabilities.

One development complexity with the 1000m Deep ESP system was that it could not be tested on shore under the pressures it would experience during deployment. The system needed to be fully immersed in the pressure environment for the forces to be exerted during decompression, and it was much too large to fit in any readily available hyperbaric pressure chambers. This made actual deployments in the ocean the only place that engineering testing could be done. It took several months of test dives and iterative modifications to resolve a pressure induced control instability with the linear actuators and fix leaking valves and seals.

To prevent similar development problems in the 4000m Deep ESP, we set a design goal that the system be testable at MBARI, at deployment pressures.

III. DESIGN PROCESS

The 4000m DWSM project started with determining the system requirements based off the science objectives. It would need to sequester up to 10L of seawater; decompress that from a potential 41 MPa to 300 kPa absolute, provide that water to the core ESP for processing; collect the filtered water back from the core ESP; and prepare for the next sampling event. The functional requirements and design goals are as follows:

- a. Operate from 0 to 4000m
- b. Collect up to 10L of seawater
- c. Sequester a single volume for processing
- d. Maintain homogenous sample
- e. Prevent sample-to-sample contamination
- f. Deployment duration up to 1 year
- g. Operate in water temperatures, 0-35°C
- h. Function by a series of stable, safe state sequences
- i. Deployment pressure testable while on shore

A. Conceptual Design

A systems engineering approach was used to develop the sequence of operations that the DWSM, regardless of hardware implementation. The 4000m DWSM provides the ESP with a volume of water to sample and process via a series of steps, each transitioning from one stable condition to another stable condition, so that a single mode failure at any state would either remain stable at that condition, or predictably drift to the last stable condition. The sequence of steps is:

1. Intake a volume of seawater, sequestering up to 10L in the sample bag
2. Isolate sea water valves
3. Decompress DWSM
4. If gas is generated from the sampled seawater, transfer and vent off; resume decompression
5. Once stable decompression is reached, isolate oil valves.
6. Open water isolation valves to the ESP core

7. Push water from the Sample bag through the filtration stage of the ESP, collecting the filtered water in the exhaust bag
8. Once filtering of the sequestered sample is complete, close isolation valves to the core ESP
9. Recompress the system to ambient pressure
10. Exhaust water, and prepare for next sampling event

B. Lung Based System

Several different design concepts were formulated for the 4000m DWSM. Some were based upon known architectures, like the 1000m version, but others were new, original ideas. All of these concepts were compared and evaluated against the functional requirements. The concept with the greatest potential to meet the requirements and design goals was modeled after lungs and the biological processes of breathing.

(Lung Diagram)

To inhale air into the lungs, the human body generates reduced pressure inside the chest in two ways. Most notably, muscles of the diaphragm contract, increasing chest volume. Also, accessory muscles in the chest lift the ribs upward to additionally expand the volume. When an air passage is open via the mouth or nose, the ambient air pressure drives air in the lungs, filling the volume made available. To exhale, the diaphragm and accessory muscles relax and the weight of the chest places the air inside the lungs at higher pressure than ambient. To exhale more forcefully, abdominal muscles contract to push upward on the diaphragm, increasing the pressure more, and air is forced out.

As described, the 4000m DWSM mimics human breathing action by pumping oil into or out of the hard pressure housing to generate a pressure differential. Inside the pressure housings, the pressure generated by the oil pumps is transferred thru the flexible “lung” membrane bags to the raw seawater, which then flows if allowed to. The raw seawater is drawn into the system, pumped thru the ESP, and exhausted back to the ocean all by pumping hydraulic fluid.

(DWSM diagram –base diagram for following 4)

A major benefit of oil pumping systems, instead of piston cylinders like the 1000m version, is the pumps contact only oil, effectively eliminating pump corrosion and contamination concerns. Additionally, the 4000m DWSM pump design decouples the sample volume from the size of the driving mechanisms. The pumps can move greater volumes by simply allowing more pumping time. The sample volume could be increased by using larger chambers and bags, with no significant change to the driving mechanisms.

The 4000m DWSM uses three oil pumps to move the seawater around and decompress the system. The bidirectional Intake/Exhaust Pump (IEP) is used to generate low pressure differentials to ambient, and is used to fill and empty the seawater bags. To create the decompressed environment for

the ESP to filter, a unidirectional decompression pump is used to pump oil out to ambient storage at high pressure differential. A third Sample Pump (SP) is used to pressurize one bag versus the other and thereby drive water through the ESP filter stage.

(Inhale diagram: Flow path of se water into sample bag; oil from sample to exhaust, and pumped oil out to ambient storage.)

Inhale/Exhale

When inhaling seawater, oil is pumped from inside the hard chambers to a storage reservoir outside at ambient pressure outside of the DWSM. This pumping decreases the pressure inside the chambers and the higher ambient pressure forces seawater to flow into the selected valve port, filling the appropriate seawater bag. In exhaling, oil is pumped into the chambers from the reservoir, increasing the pressure inside the chambers above ambient. The seawater in the appropriate bag is pushed out through the selected valve port.

(Decompression Diagram: Flow path of oil from sample to exhaust, and pumped oil out to ambient storage.)

Decompression

Compared to the other concepts considered, a major benefit of the lung inspired system is that it functions by pressure differentials already. Decompression is the same action as inhaling, pumping oil out of the hard volume. With the intake valve closed, another pump of much higher pressure capacity is used to pump oil from inside the chambers to the ambient storage. As there is no open port for the seawater to make up the pressure differential, the pressure inside the chambers continues to drop until the target pressure is reached.

(Sampling Diagram: Flow path of sea water from sample to exhaust bags through ESP, and oil pumped from exhaust to sample)

Sampling

After decompression, a flow path is opened through the ESP instrument’s filtering stage. The sample pump pumps oil from the exhaust chamber to the sample, slightly pressurizing the sample bag relative to the other. This drives the raw seawater through the filter membrane in the ESP instrument, and into the bag of the exhaust chamber.

(Recompression Diagram: Flow path of oil into exhaust and sample from ambient storage.)

Recompression

After the filtering is completed, the ESP isolation valves are closed and the DWSM chambers can be brought back to ambient pressure safely. Recompression is accomplished by allowing oil from the ambient reservoir to flood back into the decompressed chambers. To prevent a potentially damaging

pressure spike, the decompressed volume is initially opened thru a restricted flow needle valve, adding significant flow resistance. When the pressure differential between the chambers and the sea is small, a full port valve is then opened to the ambient storage so that the pressures may finish equalizing much more quickly.

The decompression pump can only pump oil out of the chamber, so the restricted flow valve allows for a method of slightly increasing the chamber pressure when decompressed. So, if the target pressure were overshoot during decompression (e.g. the DWSM chambers were brought down to an absolute pressure of 150 kPa instead of the desired 300kPa), it can be brought up slightly by momentarily allowing oil flow through the restricted flow valve.

Proof of Concept

The hydraulic lung pumping concept was novel enough that a proof of concept was needed. As the bulkhead plates of the final design are complex machined manifolds that all equipment converges into, changes to the flow paths could not be made without significant redesign and fabrication costs. So, prior to starting detailed design, a 2L sequester proof-of-concept was fabricated out of PVC piping, valves, and IV bags for Sample and Exhaust. This proof-of-concept was used to demonstrate the system, verify the sequence of operations, lock down the valve scheme, and show that controllable volumes of water could be moved by pumping only the oil. Although this proof of concept was very basic, it did validate the hydraulic lung process quite well, and allowed lock-in of the valve and flow schemes for the final design.

IV. DETAILED DESIGN

(Fluid Schematic)

The hydraulic fluid used is 20 cSt nontoxic silicone oil, and was chosen as it is inert to the ESP detection chemistry in the event trace amounts get into the sampled seawater. One drawback of the silicone oil is that it will affect most silicone rubber materials in contact with it, including seals and orings. Thus, nitrile materials were selected whenever possible and COTS components were carefully reviewed to ensure that no silicone materials were exposed to the oil.

Intake/Exhaust Pump

The Intake/Exhaust pump (IEP) resides in the Exhaust oil chamber and pumps to and from the ambient oil reservoir. This action generates the differential pressure in the DWSM that inhales and exhausts the seawater from either of the sample bags. The IEP is a positive displacement pump, so the inhaled seawater volume can be controlled by tracking the encoder position of the motor driving the IEP pump.

The IEP was originally a gear pump; however this pump had trouble operating at increasing depths. The most likely reason is the formation of low pressure pockets between the meshing gears. At sea level, a small vapor pocket could form in that

void. At depth, the high ambient pressure forces the gears together. This increases the drag on the motor, resulting in an increase in current required to maintain pump speed. This theory is consistent with an observed increase in running current, proportional to the ambient pressure, and excessive wear seen on the gear teeth of the IEP.

The initial DWSM tests were done with the gear pumps, operating at the limit of their functionality. After several tests and deployments, this pump was replaced with a rotating piston pump, similar to the sample pump, but of larger displacement. This pump has been tested to 20 MPa, and deployed to 1600m depth, and shows no change in running current with respect to pressure.

A magnetic shaft coupling capable of 100mNm torque was developed so that the motors of the IEP and SP could be located in the dry electronics housings instead of the oil. The 6Al4V titanium pressure shroud is designed to be pressurized from either direction to 41 MPa.

Decompression Pump

The decompression action is made by valve isolating the 4000m DWSM chambers from the sea, and pumping oil from inside that closed volume to the ambient storage outside. Water is slightly compressible and is about 2% denser at 4000m than at the surface. The silicone oil used is similarly compressible. In addition to pumping the volume needed to expand the seawater and oil, the decompression action also needs to move the volume that the pressure housings lose when they deform under the external ambient pressure. Combined, the decompression pump needs to pump about 1 liter to decompress the DWSM from 41 Mpa.

The decompression pump used is a three piston, cam driven, high pressure hydraulic pump capable of pumping the silicone oil to an ambient storage reservoir at 41 MPa. This pump is coupled to an oil compensated 500W brushless DC motor in its own pressure housing, an extension from the exhaust oil chamber. The pump motor is driven from a motor controller in the dry electronics housing. The four conductors for the brushless motor are passed into the oil chamber by a pressure rated connector, but the motor's hall sensor and encoder are located in the dry electronics housing, magnetically coupled to the backside of the rotor shaft. This eliminates the problems associated with the encoder in the oil and under pressure, but allows a much smaller pressure connector to the motor, saving valuable space on the bulkhead plate.

Sample Pump

After decompression the 4000m DWSM begins the sampling process. The DWSM is opened to the ESP core, and the sample pump is used to generate the differential pressure across the filter membrane within the ESP. The speed of the sample pump is servo regulated to maintain the appropriate pressure differential as particulate matter builds up on the filter. This servo is based upon the pressure difference between the DWSM chambers.

The sample pump is a valveless rotating piston pump, submerged in the Sample side oil chamber. It is also

magnetically coupled to a motor and encoder, located in the dry electrical housing on the other side of the bulkhead plate. This pump is bypassed during decompression and recompression, allowing free oil flow between the chambers. The bypass is also used to equalize chamber pressures, so the pressure servo can be zeroed prior to start of filtering.


Compliance

With the change to a reciprocating pump, the IEP induces pulsed flow that is marginally within limits, but still results in undesirable conditions. A spring loaded pulse damper was developed to even out the oil and water flows. Typically pulse dampers use an air chamber to buffer the pressure, however, at 4000m depth, such air pockets disappear. This forced MBARI to develop a bi-directional spring loaded pulse damper, and is used on both the IEP and the Sample Pump. On the IEP, the spring loaded damper functions as a simple pulse damper, evening out the pressure spikes from the piston pump cycling. For the Sample Pump, it also functions as spring driven compliance, resulting in more steady pressure on the filter membrane.

Lungs-Water Bag System

The 4000m DWSM holds the raw and filtered seawater in flexible bag assemblies suspended in the oil chambers. The bag assemblies consist of the bag itself, a multiport cap, internal tubing, a stirring pump, a pressure switch assembly, and a seawater isolation diaphragm for the pressure switches.

The 10L bag is made of woven nylon with a polyethylene lining, and is commercially manufactured for water storage while camping. The only modification is heat sealing the outer seam of the bag to prevent any shedding of nylon fibers into the process oil. Although there have been no failures of the bags, they are replaced after every major deployment.

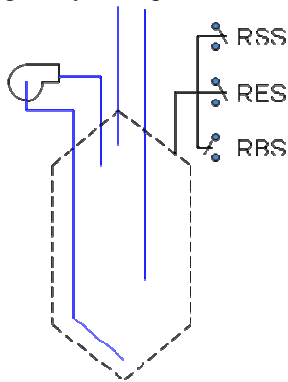

The custom designed bag cap replaces the stock cap, and connects the seawater ports of the chamber to filling and sampling tubes that go into the bag. The filling tube opens to the very top of the bag, so that if any gas is present or generated during decompression, it will collect at the top and can be vented out. The ESP sampling tube pulls water from the 2/3 depth point in the bag. This depth point of the bag was chosen to avoid collecting any clumped sediment from the bottom, but to also reduce the likelihood of drawing air into the ESP instrument once filtering has started, which would prematurely stop filtration. The finer porosity (0.2 micron)

filter membranes, used in the ESP for capturing bacteria, will not pass air once they become wet.

The seawater bags can suffer from the same problems as lungs; microbes and particulate can collect in the lower portions. In the DWSM, biological material must not settle out for two reasons. For the ESP instrument to accurately measure quantities of microbes per volume of seawater, the particles must remain in suspension. In addition, particulate that settles and is not expelled could contaminate future sampling and analysis. To keep the particulates suspended in the 4k DWSM bags, a stirring pump draws water from the bottom of the bag and returns it near the top.

Pressure switches

During normal operation, the pumps may produce pressures that would easily damage the bags, however when inhaling or exhaling water, that pressure differential is not across the bag membrane, but across the tubing, valves, or filters that restrict the water flow. It is only when the bag volume has reached the limit conditions that the pressure differential could be applied against the bag membrane.

Filling the DWSM bags too much may cause a burst or seeping of seawater into the process oil. In addition, an overly emptied bag can be squeeze damaged at the hard cap in just the same way. The 4000m DWSM detects when a pressure differential exists across the bag membrane. This is needed to detect the squeeze and burst risk conditions, but also the normally encountered condition of a slight pressure on the bag, indicating the normal “empty” condition.

There are three pressure switches connected to the bag cap. The “empty” pressure switch triggers when the bag volume maintains a 3.7 kPa pressure blow the oil in the chamber. The control system manages this normally encountered condition, shutting off the pump and setting the volume counter to zero, declaring the bag empty. “Squeeze” condition is signaled by a 12.5 kPa pressure below that of the oil, and the “burst” condition is 3.7 kPa above the oil in the chamber. In addition to signaling the controller, the squeeze and burst switches also trip hardware limit switches on the motor controllers, cutting power to any pump that could continue to add pressure in the risk direction in case of a software malfunction.

The switches used have a double contact that is vibration and acceleration resistant. However the contacts are exposed to the working fluids. Although that is not a problem for the oil side of the pressure switches, the seawater side would continuously short out and eventually corrode. To prevent this, the bag cap contains a small flexible diaphragm transfer barrier, filled with silicone oil. In this way, the pressure switch contacts are not exposed to seawater, but still reference the pressure in the bag.

Pressure boundary

All equipment in the DWSM is structurally mounted to the bulkhead plates, which also function as the main fluidic manifolds and penetrator bases for cabling and fluid connections. The design of these plates became the focal point

that all the other components and system designs keyed into, but where they also competed for space. Additionally, these plates are part of the pressure boundary to the electronics chamber, and have to hold back the 41 MPa pressure when the oil chamber is at ambient pressure. To complete the design of these plates, many of the other system components had to essentially be designed simultaneously. The plates are made from 6Al4V titanium for strength and corrosion resistance as they do manifold the raw seawater.



Fig. 2 Sample and Exhaust bulkhead plates for 4000m DWSM, made from 6Al4V titanium, Exhaust plate on right. Over 100 hours of CNC machining was required, and helical mill threading was used for the 80 threaded holes.

Bell shaped pressure housings are used for the oil chamber and the dry electronics chambers. The bulkhead plate is bolted to the bottom (oil) chamber housing, so that it can contain pressures greater than ambient when the system is exhaling sea water. The top housing for the electronics bolts to the bottom housing, sandwiching the bulkhead plate between them. For manufacturing convenience, the bell housings are all identical, and are currently made of anodized 6061-T6 aluminum for cost effective development. For yearlong deployments, the aluminum bell housings could be replaced with titanium ones without affecting the action or capabilities of the DWSM.

As the high torque of the decompression pump is much greater than can be magnetically coupled, the HPP motor is hard coupled to the pump and oil submerged at the same pressure as the oil chamber. It resides in a special 17-4 SS and 6Al4V Titanium two-piece pressure housing that extends from the Exhaust bulkhead into the dry electronics housing of the Exhaust tower.

Rotary Valves

The oil and seawater paths of the 4000m DWSM chambers need to be isolated from the sea pressure. Several high pressure 3-way valves are used in the oil and seawater flow paths. The three way valves are each attached to a motorized actuator and encoder for the ESP to automatically set the valve positions needed for each cycle of the sampling process. Swagelok Trunion valves were chosen due to their high pressure capacity, low actuation torque, and ready availability. Three of these valves manage oil flow paths, and four valves for the seawater paths. As all these valves are stainless steel, eventually corrosion will require rebuilding the seawater valve

system. For ease of maintenance, all the seawater valves are located in the Sample side dry pressure housing.

Pressure transducers

The oil pressures of both the sample and exhaust chambers are monitored by pressure transducers reading absolute pressure to 41 MPa. These transducers are also the source signal for decompression and the sample pump servo controls, typically around 300kPa absolute. However, that is low in the transducer operating range, and temperature changes can cause significant drift. A digital pressure transducer, located in the exhaust side, is used to calibrate the analog transducers (and the custom electronics connected to them) to verify they are reading accurately enough to open the bulkhead valves to the core ESP safely.

Electrical

The DWSM module works as an ancillary device to the core ESP, with a common design for valve motors and encoders. Because of these similarities, we decided to follow the blueprint of the core ESP and designed DWSM electronics similarly, simplifying part acquisition and communication between the two devices. The distributed control architecture consists of a top-level, non-real-time processor managing several small, distributed, real-time processors, each tasked with monitoring local state or function (e.g., pump state, valve positions). The top-level processor is part of the ESP instrument and performs coordination and sequencing to the distributed controllers. The distributed controllers perform A/D conversion, and provide DC motor control for two servo channels and four rotary valves, as well as eight solenoid drivers. The core ESP instrument commands the DWSM by an RS-232 serial link, while the controllers within DWSM communicate on an I2C interface.

Unfortunately, this electronics arrangement did not support sensing the pressure state of the sample bags, i.e. the bag pressure switches. Thus, a new electronics board was developed that monitors DWSM chamber pressure transducers and the pressure switch conditions of the bags. This new board provides a high precision analog signal over a large dynamic range (41 MPa to 300 kPa absolute) for pump servo control using pressure inputs from both the sample and the exhaust chamber transducers. This new board also signals the distributed controller of the normally encountered bag “empty” state, resetting the bag volume counter to zero. In the event of a “squeeze” or “burst” error, the new board latches the state and locks out pump power on the distributed controllers, preventing further pump operation that could result in bag damage.

V. HIGH PRESSURE TESTING

As earlier mentioned, a design goal was to be able to operate the system at deployment pressures while still in the lab. This goal put preference on DWSM concepts that could be pressure tested more easily. The architecture of the lung-based 4000m DWSM is such that all the operating pumps and motors are inside the pressure housings. There are only two

ports that connect to the outside pressure, one for seawater and one for oil to/from the ambient storage. To test the DWSM at elevated pressure, only three things are needed, a source of high pressure water, a source of high pressure oil, and a mechanical bolting arrangement to hold the pressure housings sealed while pressurized internally. The pressure housings were designed to not only withstand the 41MPa of external pressure when deployed, but also to contain the same pressure internally when tested in the lab. For the bell housings, this required designing a significant flange and bolting assembly as well as a 41 MPa seal that functions with pressure from either direction. Fig. X shows the system under 20 MPa testing. The twelve high tensile jacket bolts on each tower are used only during lab testing. As ambient sea pressure is sufficient to keep the pressure housings assembled when deployed, prior to deployment the jacket bolts are replaced with four smaller stainless steel fasteners without any disassembly of the DWSM towers.



Fig. 3 DWSM assembly with flanges and jacket bolts for 20 MPa pressure validation prior to deployment. The jacket bolts are pre-tensioned to maintain seal integrity when internally pressurized.

A High Pressure Interface (HPI) system was developed for development pressure testing of the DWSM. The core of the HPI is a 45 MPa transfer barrier accumulator that provides pressure balanced water and oil to the DWSM so that it can operate at deployment pressure in the lab, executing all the operations under the same loads as when deployed. As the deep ocean is cold, to further simulate the conditions while deployed, the fully assembled DWSM, ESP instrument and HPI are placed in a refrigerated shipping container and operated at 2°C. In this manner, all the pumps, switches, and valves operate the same sequences, at the same pressure and temperature as they will during deployment. Since the HPI pressure and cold test can be accomplished in just a couple days, it has become standard to do a full system validation at deployment temperature and pressure prior to every mission at sea.

VI. DEPLOYMENTS

The 4000m DWSM is deployed as part of the Deep ESP benthic instrument, which has been operated at several sea floor locations since April 2009. The Deep ESP assembly is a cylindrical package, 2m tall x 2m diameter, containing the 4000m DWSM, the ESP instrument, system batteries and context sensors. It has been operated autonomously and interactively via a remotely operated vehicle or cabled ocean observatory, e.g. the Monterey Accelerate Research Station [x].

In July 2010, the Deep ESP was operated at a methane mound in the Santa Monica Basin, and at Axial Seamount in July 2011 (1540m) [x].

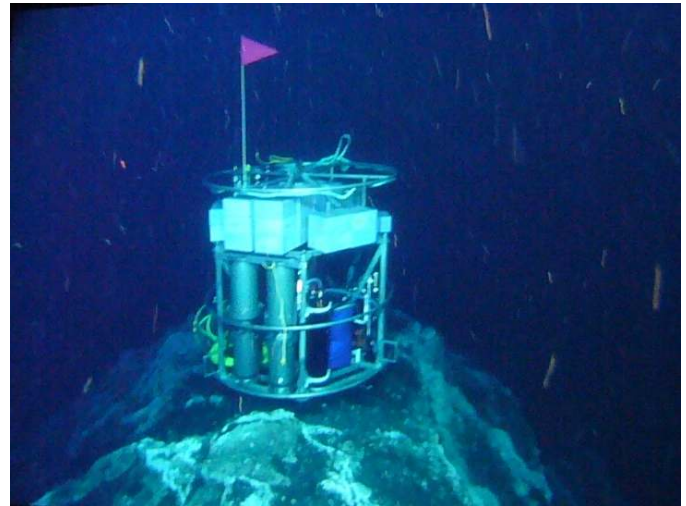


Fig. 4 Deep ESP system deployed on top of the Southern California Methane Mound, 800m deep.

VII. FUTURE DIRECTION

The development of the 4000m DWSM continues and the next objective is a long term deployment on a cabled ocean observatory. As the DWSM bags and fluidics are exposed to raw seawater, after a period of time, flushing of the bags may not be enough to prevent microbial growth from contaminating the DWSM. As the ESP instrument can detect even just a few cells per liter of sea water, the need to clean and sterilize the bags and plumbing will likely become necessary. The capability of decontaminating the DWSM *in situ* was planned for in the original conceptual design, but has yet to be fully implemented.

Coupled with long term deployment capability is another science objective of the DWSM, to allow for *in situ* deep water incubation experiments. The concept of operation is that the DWSM would sequester a volume of seawater (either inside or outside of the chambers); add a volume of nutrient or other stimulus; and allow that mixture to incubate at the same temperature and pressure environment. This would enable research into microbial population changes due to various environmental or nutrient stimuli.

Corrosion of DWSM components may become a greater concern for long term operations. Much of the complex

components are titanium already, but that can be a source for galvanic corrosion when immersed in seawater. We are planning some studies to determine if a powered anode will be sufficient to protect against galvanic corrosion, as well as weighing the costs of additional titanium parts versus replacing expendable aluminum ones.

VIII. CONCLUSION

In order to significantly increase the depth capability of *in situ* autonomous microbial identification, an interface module was developed that can provide decompressed seawater for analysis by a low pressure scientific instrument at depths to 4000m. Lungs and the process of breathing inspired this Deep Water Sampling Module, enabling not only greater capacity, but a fault resistant system, and development testing under real pressure. The ESP with the DWSM is enabling new scientific research of the deep ocean with the goal of better understanding the life and chemistry of the deep sea.

ACKNOWLEDGMENT

The development and fabrication of this technology required the support of many individuals. Special thanks are given to the crews of the R/Vs Point Lobos and Western Flyer for their expertise during field deployments. Without you, this technology would never get off the dock. Special thanks are also given to Ray Thompson and the MBARI machine shop for their expert work.

REFERENCES

- [1] Scholin, C. S. Jensen, B. Roman, E. Massion, R. Marin, C. Preston, D. Greenfield, W. Jones, K. Wheeler, "The Environmental Sample Processor (ESP) – An Autonomous Robotic Device for Detecting Microorganisms Remotely using Molecular Probe Technology." *Proceedings, OCEANS 2006 MTS/IEEE Conference*. Boston, MA. Marine Technology Society, Columbia, MD.
- [2] Environmental Sampling Processor website: <http://www.mbari.org/esp/>
- [3] Roman, B., C. Scholin, S. Jensen, E. Massion, R. Marin III, C. Preston, D. Greenfield, W. Jones, and K. Wheeler, "Controlling a Robotic Marine Water Sampler with the Ruby Scripting Language" *Journal of the Association for Laboratory Automation*, Volume 12, Issue 1, February 2007, Pages 56-61
- [4] Roman B, Scholin C, Jensen S, Marin R, III, Massion E, et al. "The 2nd generation Environmental Sample Processor: Evolution of a robotic underwater biochemical laboratory" *OCEANS 2005 MTS/IEEE Conference*. Washington DC: Marine Technology Society; 2005
- [5]